
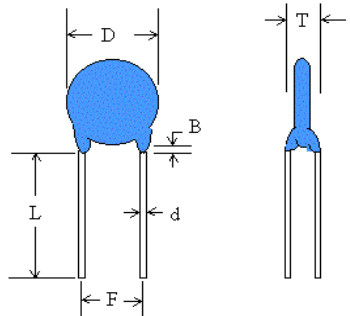



# CINETECH INDUSTRIAL CO., LTD.

## CERAMIC DISC CAPACITORS

SPECIFICATION FOR APPROVAL				
承認規格				
CUSTOMER 客戶			DATE 日期 2015.02.24	
USER PART NO. 客戶零件代號	<b>JY222M2GY5VS5TE</b>		description 品名 AC安規電容器 (Y)	
USED SPEC. 適用規格				
		D:	7.5 MAX	
		T:	5 MAX	
		F:	5 ± 0.8	
		Ho:	20+1.5-1	
		d:	0.56 ± 0.1	
		B:	3 MAX	
		COLOR CODE: 顏色	<input type="checkbox"/> 土黃色 <input checked="" type="checkbox"/> EPOXY (藍色)	
SPECIFICATIONS 規格				
RATED CAP. 公稱靜電容量	2200 PF		Related Standard	
CAP. TOL. 靜電容量容許差	± 20 %		UL60384-14	
TEMP. CHARACT 溫度特性	Y5V			
INITIAL tan δ 初期 tan δ	5.0 % MAX		VDE (Germany) DIN EN 60384-14( VDE 0565 Teil 1-1 ):2006-04; EN60384-14:2005-08 IEC 60384-14(ed.3)	
Approved Monogram 認証國家	RATED VOLTAGE 額定電壓		SEMKO (Sweden) EN 60384-14:2005	
	X1	Y2	SEV (Switzerland) IEC 60384 -14(ed.3):05	
	400 VAC	300 VAC	FIMKO (Finland) EN 60384-14:2005	
			NEMKO (Norway) EN 60384-14:2005	
VLOTAGE PROOF 耐電壓	BETWEEN TERMINALS 端子間		DEMKO (Denmark) EN 60384-14:2005	
RATED VOLTAGE 額定電壓	400 VAC	<b>AC 2600V</b> FOR 60 SEC	FIMKO CB IEC 60384-14:2005	
INITIAL 初期絕緣電阻 INSULATION RESISTANCE	10,000 MΩ MIN		本公司承認欄	
CUSTOMER'S SIGNATURE 貴公司承認欄				
		Approval 核決	Chief 審核	Inspector 檢驗
		