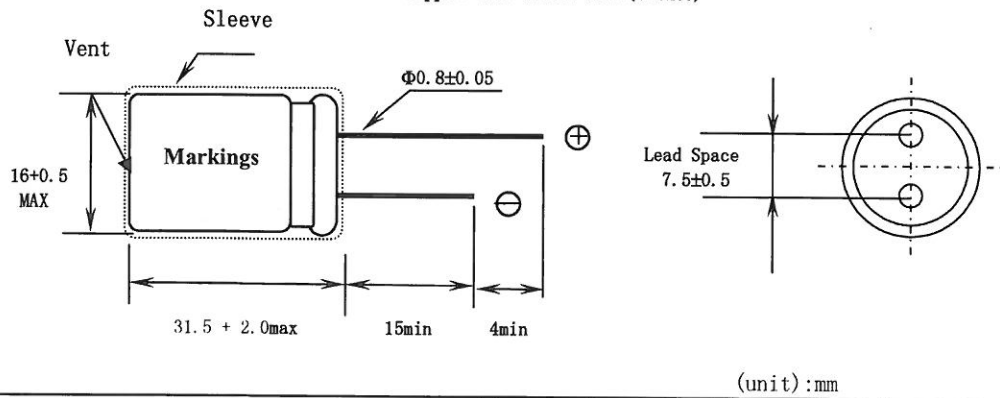


**KOSHIN**

Aluminum Electrolytic Capacitor Specification				
Series	KR1	400 V 68 $\mu$ F	Part No.	KR1-400V680KJ315
Customer No.	/		Case size	$\Phi$ D16 X L 31.5
Specification	Items		Standard	
	Operating temperature range		- 25 ~ + 85 $^{\circ}$ C	
	Capacitance tolerance		$\pm 10\%$ ( 20 $^{\circ}$ C , 120Hz )	
	Dissipation factor (MAX)		( Less than ) 0.15 ( 20 $^{\circ}$ C , 120Hz )	
	Leakage current (MAX)		( Less than ) 816 $\mu$ A ( 20 $^{\circ}$ C 400 V 2 min )	
	Impedance (MAX)		\	
	Ripple current (MAX)		310 mArms ( 120Hz , 85 $^{\circ}$ C )	
	Load life		2000 hrs	
Outline	Sleeve color		Black	
	Marking color		White	
	( Dimensions )			
	Copper clad steel wire(tinned)			
				
Recorder		(The first edition) :2015-12-16		
Wrote by: Luoli		Checked by: Dingchanghua		Approved by: Shenzhihong

(Issue No.) : DJJ-2875