

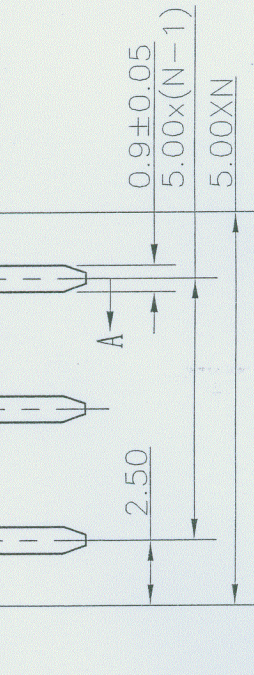
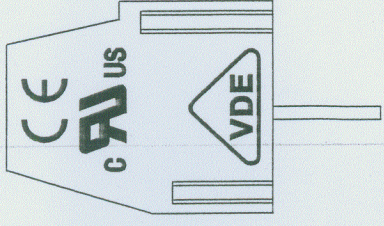
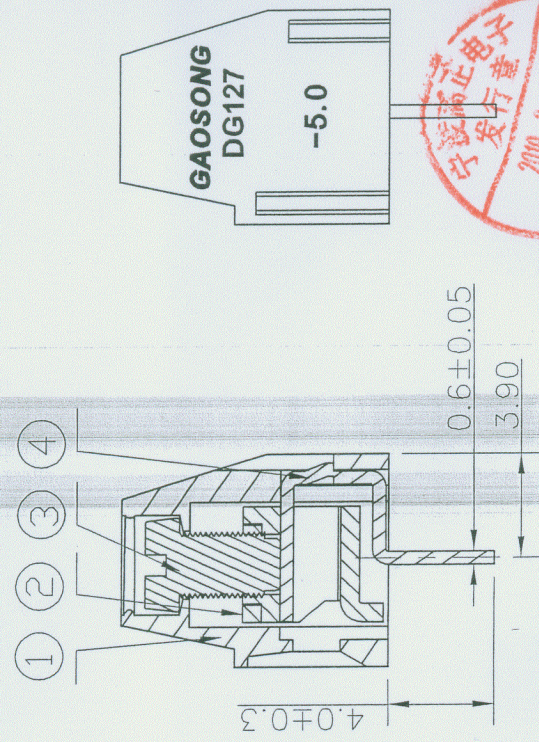


REVISION RECORD	
REV	DESCRIPTION

- Notes:
1. pitch: 5.00mm
 2. Rated voltage/current: UL 300V/12A
VDE 250V/15A
 3. Insulation resistance: 5000MΩ/DC1000V
 4. Withstanding voltage: AC2000V/1min
 5. Wire range: 26~14AWG 1.5mm²
 6. Temp. Range: -40° c ~ +105° c
 7. Torque: M2.5 4.08kgf.cm
 8. Undimensioned Tolerances:

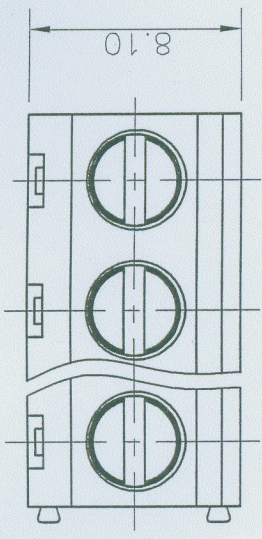

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
1	DG127-5.0 Housing	4028A0YXXS (H)	1	PA66	UL94V-0

DEGSON®
DEGSON ELECTRONICS CO., LTD
宁波高正电子有限公司

NAME: DG127-5.0-XXP-1Y-05S(H)
DRAWING NO. DG127-5.0-E23
/PART NO. A3
REV. B3/18/09
SHEET 1 OF 1

ITEM	DESCRIPTION	XX	Material
4	DG127 Pin	XX	Sn/Ce
3	DG127 "—" Screws	XX	Steel
2	DG127 Cage	XX	Iron