
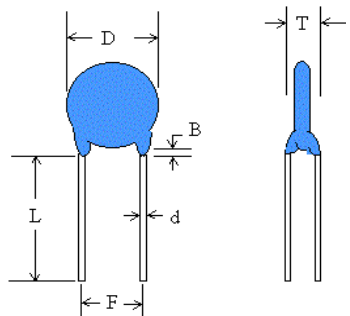



# CINETECH INDUSTRIAL CO., LTD.

## CERAMIC DISC CAPACITORS

SPECIFICATION FOR APPROVAL			
承認規格			
CUSTOMER 客戶		DATE 日期	2015.02.24
USER PART NO. 客戶零件代號	<b>JY222M2GY5VS95E</b>	description 品名	AC安規電容器 (Y)
USED SPEC. 適用規格			
		D:	7.5 MAX
		T:	5 MAX
		F:	9.5 ± 0.8
		L:	5.5±0.5
		d:	0.56 ± 0.1
		B:	3 MAX
		COLOR CODE: 顏色	<input type="checkbox"/> 土黃色 <input checked="" type="checkbox"/> EPOXY (藍色)
SPECIFICATIONS 規格			
RATED CAP. 公稱靜電容量	2200 PF	Related Standard	
CAP. TOL. 靜電容量容許差	± 20 %	CSA (Canada)	UL60384-14
TEMP. CHARACT 溫度特性	Y5V	UL (USA)	
INITIAL tan δ 初期 tan δ	5.0 % MAX	VDE (Germany)	DIN EN 60384-14( VDE 0565 Teil 1-1 ):2006-04; EN60384-14:2005-08 IEC 60384-14(ed.3)
Approved Monogram 認証國家	RATED VOLTAGE 額定電壓		SEMKO (Sweden)
	X1	Y2	SEV (Switzerland)
	400 VAC	300 VAC	FIMKO (Finland)
			NEMKO (Norway)
VLOTAGE PROOF 耐電壓	BETWEEN TERMINALS 端子間		DEMKO (Denmark)
RATED VOLTAGE 額定電壓	400 VAC	<b>AC 2600V</b> FOR 60 SEC	FIMKO CB
INITIAL 初期絕緣電阻 INSULATION RESISTANCE	10,000 MΩ MIN	本公司承認欄	
CUSTOMER'S SIGNATURE 貴公司承認欄		Approval 核決	Chief 審核
		