


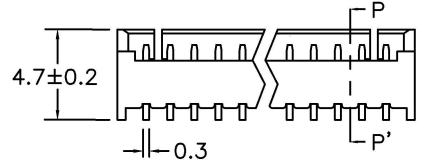
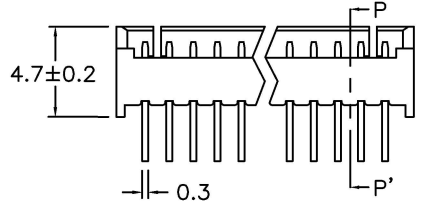
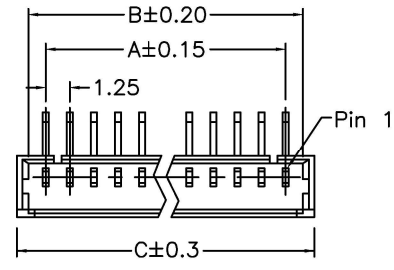







REV.	SPECIFICATION	ECN NO.	APPD.

Material:
Housing: PA6T,UL94V-0.,Natural.
Contacts: Brass,100u" Matte Tin Plated over Nickel 50u".
Electrical Characteristics:
Current Rating: 1 AMP.
Voltage Rating: 125V AC.
Dielectric Withstanding Voltage: AC 250V.
Insulator Resistance: 100MΩ min.
Contact Resistance: 20mΩ max.
Operating Temperature: -25°C~+85°C.
***RoHS Compliant**

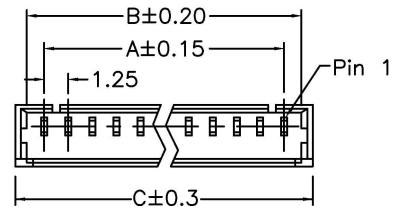

Straight Type
Section P-P'

Right Angle Type
Section P-P'



4573- xx MT x B
Series No. of Pin Count MT: Matte Tin Plated S: Straight R: Right Angle B: Bulk Package

Position	2 Thru 15
Dimension	
A	(No. of Positions X 1.25)-1.25
B	(No. of Positions X 1.25)+0.55
C	(No. of Positions X 1.25)+1.75

Tolerances	Dwg. No.	4573D01001
x = ±0.5	Projection	
.x = ±0.25	Unit	mm
.xx = ±0.15	Scale	1:N
	Drawn By	Sherry07/23'19

Title:
4573 Series
Wafer 1.25mm(0.049")
DIP Type

OUPIIN ELECTRONIC(KUNSHAN) CO., LTD.			
P/N: 4573-xxMTxB			
SHEET	1/1	Ver.No.	A9