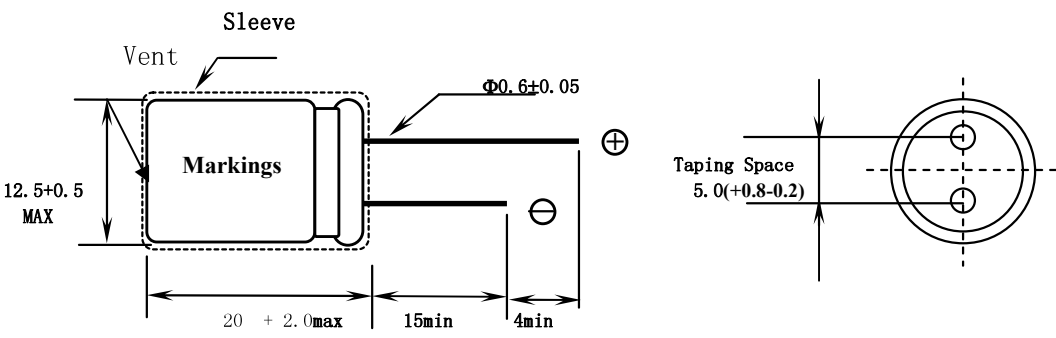


Aluminum Electrolytic Capacitor Specification

Series	KLH	400 V 22 μ F	Part No.	KLH-400V220MH200-T/A5.0
Customer No.			Case size	Φ D12.5X L20
Specification	Items		Standard	
	Operating temperature range		- 25 ~ + 105 $^{\circ}$ C	
	Capacitance tolerance		\pm 20% (20 $^{\circ}$ C , 120Hz)	
	Dissipation factor (MAX)		(Less than) 0.15 (20 $^{\circ}$ C , 120Hz)	
	Leakage current (MAX)		(Less than) 264 μ A (20 $^{\circ}$ C 400 V 2 min)	
	Ripple current (MAX)		314 mArms (100KHz , 105 $^{\circ}$ C)	
	Impedance (MAX)		2.875 Ω (100KHz , 20 $^{\circ}$ C)	
	Load life		5000 hrs	
Outline	Sleeving pipe basic		PVC	
	(Dimensions)			
	Copper clad steel wire(tinned)			
 <p style="text-align: right;">(unit):mm</p>				
Recorder	(The first edition) :2011-9-3			
Wrote by: YangPeng		Checked by: Dingchanghua		Approved by: Shenzhihong