

ORDER INFORMATION



SPECIFICATION

Current Rate: 3 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Voltage: 500V AC for one minute
 Operation Temperature: -40°C to +105°C Δ

MATERIAL

Insulator:PBT, UL94V-0, Black
 Contact Pin:Copper Alloy

5 P S 1 S D A 8 5 - 1 X X X X N N N X L - 0 0

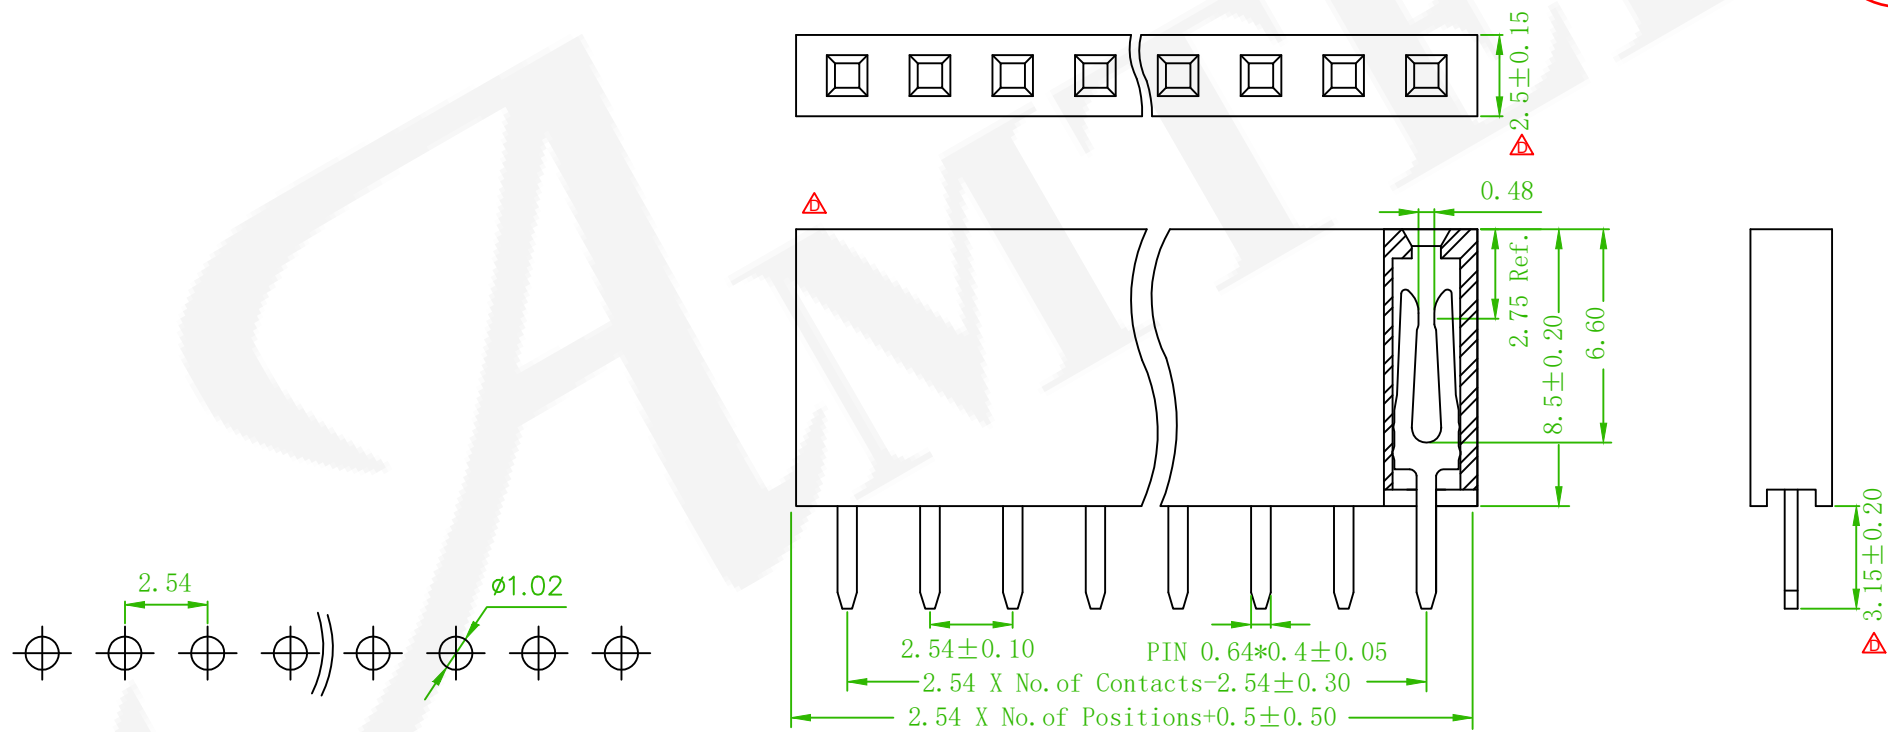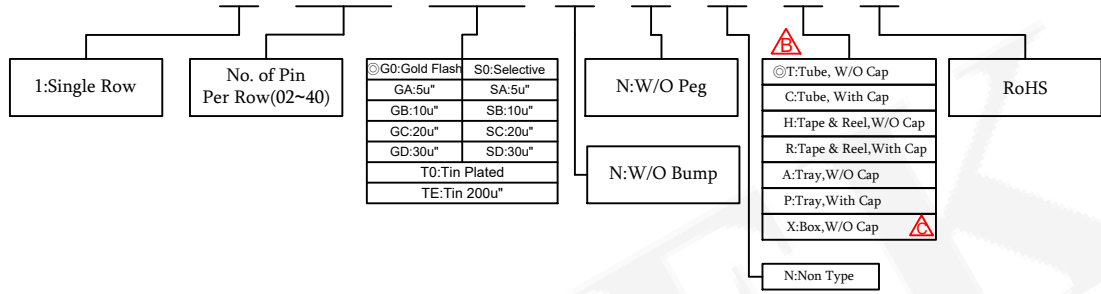

Δ Recommended PCB Layout
 (PCB TOLERANCE ± 0.05)

Old Part No. : PS1S85-1XX-L

Δ X5	ECN NO.:210308 Revise the Drawing	Alice	2021/04/09
Δ X1	Add the Package:Box	Benson	2020/12/01
Δ X1	Add the Package:Tray	Mia	2018/01/05
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

Amtek Technology Co., Ltd.
 TEL: 886-2-2260-6878
 FAX: 886-2-2260-8030

品名 TITLE	FEMALE HEADER 2.54mm V/T S/R DIP TYPE				頁數 Page	1/1
品號 PART NO.	5PS1SDA85-1XXXXNXXL-00				繪圖 DRAWN	Jeff 2015/08/27
圖號 DRAWING NO.	GN003-MC866	版本 REV.	D		核對 CHECKED	John 2015/08/27
客戶品號 CUSTOMER P/N		比例 SCALE	None		承認 APPROVED	John 2015/08/27
公差 TOLERANCE	.X ± 0.25	.XX ± 0.20	.X $^{\circ}$ ± 3	單位 UNIT	mm	THIRD ANGLE PROJECTION