




NON-SPILLABLE SEALED RECHARGEABLE BATTERY


CB121000E 12V, 100Ah

☆ SPECIFICATION	☆ CHARACTERISTICS
● NOMINAL VOLTAGE : 12 V	● CAPACITY 25 °C / 77 °F
● NOMINAL CAPACITY(20 hrs) : 100.0 Ah	20 hr @ 5.0 A : 100 Ah
● DIMENSIONS	10 hr @ 9 A : 90 Ah
TOTAL HEIGHT : 218 mm (8.58 inches)	5 hr @ 16 A : 80 Ah
CONTAINER HEIGHT : 214 mm (8.43 inches)	1 hr @ 55 A : 55 Ah
LENGTH : 329 mm (12.95 inches)	1 C @ 100 A : 50 Ah
WIDTH : 174 mm (6.85 inches)	● INTERNAL RESISTANCE(25°C , 77 °F) : 6.5 mΩ
WEIGHT : APPROX 30.10 kg (66.36 lbs)	● CHARGING VOLTAGE (25°C , 77 °F)
● MAX DISCHARGE CURRENT : 600 A (5 sec)	STANDBY USE : 2.275±0.025 V/CELL
● MAX SHORT- DURATION DISCHARGE CURRENT : 1500 A(0.1 sec)	: (-3.3mV / °C / CELL)
● STANDARD TERMINALS : RT-22 / FP-29	CYCLE USE : 2.45±0.05 V/CELL
● CONTAINER MATERIAL : GENERAL GRADE ABS	: (-5 mV / °C / CELL)
	● MAX CHARGING CURRENT : 30 A


Discharge Characteristics 25 °C (77 °F)

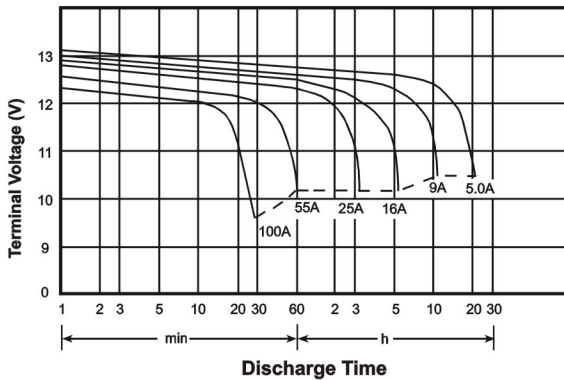

OPEN CIRCUIT VOLTAGE VS REMAINING CAPACITY

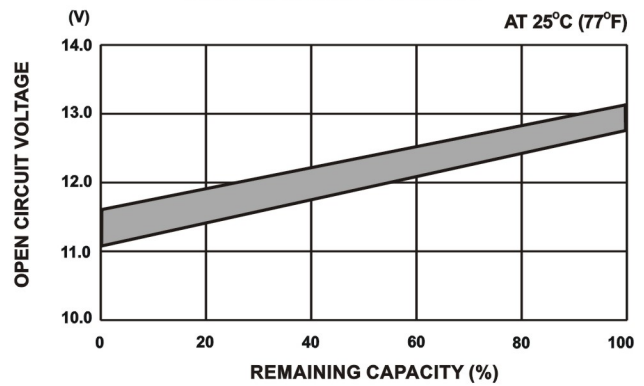

☆ Dimensions

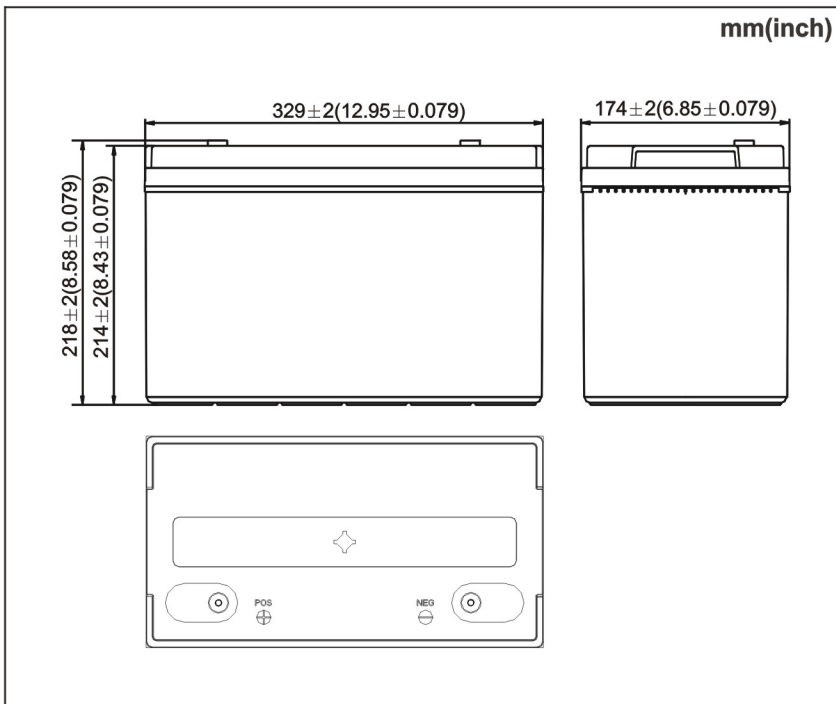

☆ Terminal

