




NON-SPILLABLE SEALED RECHARGEABLE BATTERY


# CB1212 12V, 1.2Ah

☆ SPECIFICATION	☆ CHARACTERISTICS
● NOMINAL VOLTAGE : 12 V	● CAPACITY 25 °C / 77 °F
● NOMINAL CAPACITY(20 hrs) : 1.2 Ah	20 hr @ 0.06 A : 1.2 Ah
● DIMENSIONS	10 hr @ 0.108 A : 1.08 Ah
TOTAL HEIGHT : 59 mm ( 2.32 inches )	5 hr @ 0.192 A : 0.96 Ah
CONTAINER HEIGHT : 52 mm ( 2.05 inches )	1 hr @ 0.72 A : 0.72 Ah
LENGTH : 97 mm ( 3.82 inches )	1 C @ 1.2 A : 0.6 Ah
WIDTH : 43 mm ( 1.69 inches )	● INTERNAL RESISTANCE(25°C, 77 °F) : 85 mΩ
WEIGHT : APPROX 0.59 kg ( 1.30 lbs )	● CHARGING VOLTAGE ( 25°C, 77 °F )
● MAX DISCHARGE CURRENT : 12A ( 5 sec )	STANDBY USE : 2.275 ± 0.025 V/CELL
● MAX SHORT- DURATION DISCHARGE CURRENT : 36 A ( 0.1 sec )	: (-3.3mV / °C / CELL)
● STANDARD TERMINALS : FO-01	CYCLE USE : 2.45 ± 0.05 V/CELL
● CONTAINER MATERIAL : GENERAL GRADE ABS	: (-5 mV / °C / CELL)
	● MAX CHARGING CURRENT : 0.36 A


Discharge Characteristics 25 °C ( 77 °F )

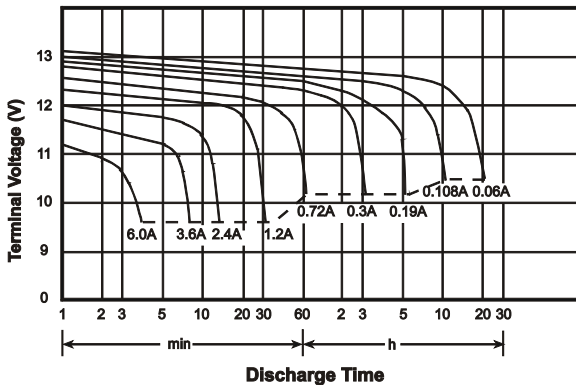

OPEN CIRCUIT VOLTAGE VS REMAINING CAPACITY

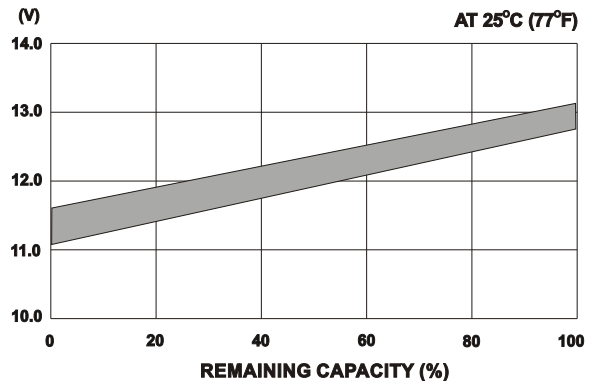

## ☆ Dimensions

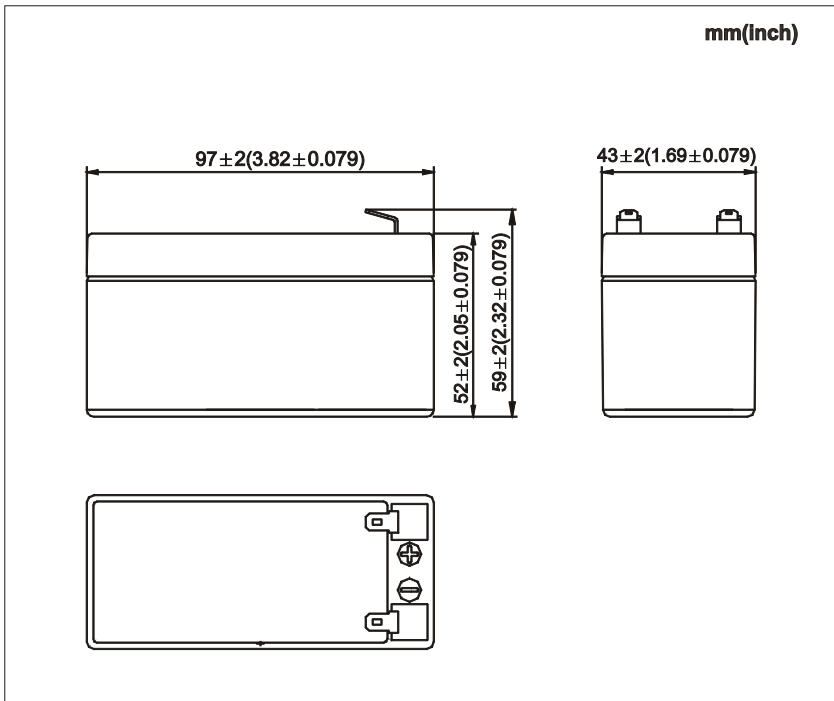

## ☆ Terminal

