

The information provided herein is from CONNPLY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNPLY or its affiliates. Unauthorized use or modification is strictly prohibited without prior written consent from CONNPLY. All intellectual properties provided herein are for reference purposes only and does not constitute authorization of its use in any format or manner. CONNPLY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.




REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJC 01/16/09'		LJC 01/16/09'
J	DRAWING UPDATE	JLZ 12/27/19'		

**TOLERANCE:**

Abbr.	TOLERANCE						
	P=0.50	P=0.80	P=1.00	P=1.25	P=1.50	P=2.00	P=2.54
P	±0.050	±0.080	±0.080	±0.100	±0.125	±0.150	±0.250
Pt	±0.050	±0.080	±0.080	±0.100	±0.125	±0.150	±0.250
W	±0.050	±0.080	±0.080	±0.100	±0.125	±0.150	±0.250
M	±0.050	±0.080	±0.080	±0.100	±0.125	±0.150	±0.250
Cw	±0.020	±0.030	±0.030	±0.030	±0.030	±0.040	±0.040
L	(15~100)±3	(101~300)±5	(301~600)±10	(601~1000)±15			

**NOTES:**

- Insulation material: PVC  
Supporting Tape material: Polyester  
Conductor material: Tin plated copper
  - Product Number Code  
DS1057-03 - X X X X X X X X X X
- Cable Style  
 A: A type  
 B: B type  
 Cable Thickness  
 1: 0.12mm  
 4: 0.136mm(For Ph 1.25mm)
- Total Length(Dim L)  
 A: 110mm  
 B: 150mm  
 C: 120mm  
 D: 160mm  
 E: 100mm  
 F: 200mm  
 G: 250mm  
 or XXX:XXXmm
- Supporting tape Length  
 4: 4.0mm 5: 5.0mm  
 6: 6.0mm 8: 8.0mm  
 10: 10.0mm
- Supporting Tape color  
 L: Blue
- Strip Length  
 2: 2.0mm 3: 3.0mm  
 4: 4.0mm 5: 5.0mm  
 6: 6.0mm
- Insulation color  
 W: White
- No.Of positions  
 02: 2pin  
 ∴  
 60: 60pin
- Conductor Size  
 H: 0.035x0.65mm(Ph 1.0mm)  
 J: 0.035x0.3mm(Ph 0.5mm)  
 K: 0.05x0.8mm(Ph 1.25mm)
- Pitch  
 1: 1.00 5: 0.50  
 2: 2.00 6: 1.25  
 3: 1.50 8: 0.80  
 4: 2.54

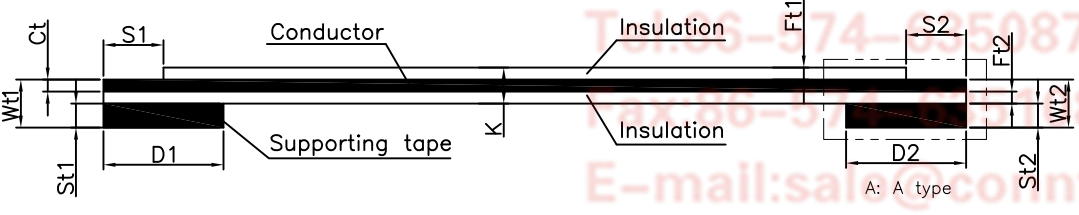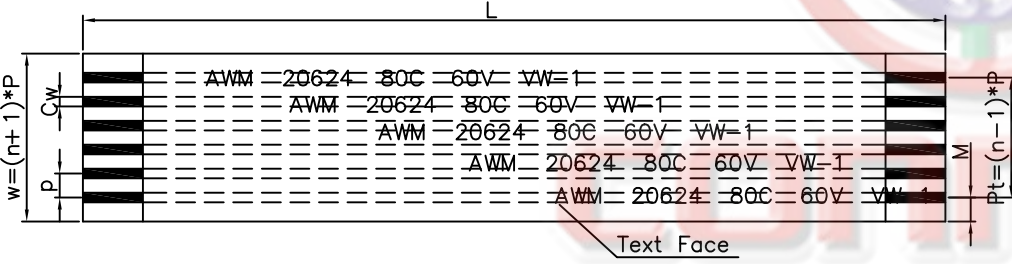

Pitch	No.Of positions	Conductor Size Ct*Cw (mm)	Strip Length S1=S2 (mm)	Supporting tape Length D1=D2 (mm)
p=0.50	06~60pin	0.035x0.3	3or4	6or8
p=0.80	06~40pin	0.05x0.5	4or5	8or10
p=1.00	03~50pin	0.035x0.65	4or5	8or10
p=1.25	03~36pin	0.05x0.8	4or5or6	10
p=1.50	02~30pin	0.10x0.5	4or5or6	10
p=2.00	02~30pin	0.10x0.5	3or4or5or6	5or6or8or10
p=2.54	02~18pin	0.10x0.7	4or5or6	10
		0.10x1.27		

Ft1±0.005	0.043
Ft2±0.005	0.043

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1057-03-XXXXX-J		

PROJECTION	TITLE
	UL 20624 FLEXIBLEFLAT CABIE
UNITS	mm
SHEET SIZE	A4
SERIES	DS1057-03 SERIES

**晨翔电子有限公司**  
 CONNPLY CONNPLY ELECTRONIC CO. LTD