




广州市鹏辉电池有限公司

GREAT POWER BATTERY CO., LTD.

广东省广州市番禺区市良路 922 号

APPROVAL SHEET

MESSRS	
BRAND	
PRODUCT	3.0V LITHIUM-MANGANESE BUTTON CELL
MODEL	CR2032(220mAh)
PREPARED BY	GUO JIN LI
APPROVED BY	WANG JU JIAN
DATE	MAY. 17, 2014



广州市鹏辉电池有限公司

GREAT POWER BATTERY CO., LTD.

广东省广州市番禺区市良路 922 号

1. 【SCOPE】

This specification applies to the following 3.0v lithium button cell CR2032 made by GREAT POWER BATTERY CO., LTD.

2. 【RATINGS】

TABLE I :

ITEM	UNIT	SPECIFICATIONS	CONDITIONS
Nominal voltage	<u>V</u>	3.0	Standard discharge
Nominal capacity	<u>mAh</u>	220	Standard discharge
Instantaneous short-circuit current	<u>mA</u>	≥ 200	Time ≤ 0.5 second
Off-load voltage	<u>V</u>	≥ 3.2	
Storage temperature	<u>°C</u>	0~35	
Standard weight	<u>g</u>	3.0	Unit cell
Service output	Initial	Standard	Continuous discharge with load 15K ω 、20~25°C till 2.0v end-voltage
	After 12 months storage	Standard	

TABLE II :

ITEM	CONDITIONS	CHARACTERISTICS	
Thermal durability	Kept for 24 tiams at 20°C \pm 25°C, then continuously discharge with 15k Ω load till 2.0v end-voltage	Standard	1120 h
Self-discharge rate	Stored for 12 months at normal temperature and humidity	$\leq 5\%$	

3. 【PERFORMANCE AND TEST METHODS】

Unless otherwise stated, all the testing is carried out under the condition: environmental temperature, 20°C~25°C; environmental humidity, 65 \pm 20%. Please refer to Table III

4. 【SUGGESTIONS AND CAUTIONS】

- 4.1 Install batteries correctly.
- 4.2 Ensure the contact points to be clean and conductive.
- 4.3 Do not mix different types, different brands batteries to serve together.
- 4.4 Do not heat, recharge the batteries.
- 4.5 Do not dispose of the batteries in fire.
- 4.6 Keep away from the small children, if swallowed promptly see doctor.
- 4.7 Pay attention to the producing date.




TABLE III:

No	ITEM	TEST METHODS	STANDARD	
1	Dimensions	Using vernier caliper (accuracy \geq 0.02) while avoiding short-circuit	Diameter	20.0 (-0.2) mm
			Height	3.2 (-0.2) mm
2	Off-load voltage	Using multimeter (accuracy \geq 0.25%) internal resistance \geq 1M Ω	\geq 3.2 v	
3	Instantaneous short-circuit current	Time of short-circuit should be less than 0.5 second and avoid repeated test within half an hour	\geq 200 mA	
4	Appearance	Eyeballing	Bright, clean, no rust, no leakage, And no flaw	
5	Capacity	Continuously discharge for 8 hours with load 15k Ω , temperature at 20~25 $^{\circ}$ C, humidity at 65 \pm 20% till 2.0v end-voltage (for fresh battery only: within 3 months)	\geq 1180 h	
6	Vibration test	Put battery on the platform of the vibrations machine, start the machine and adjust the frequency form 10 times per minute to 15 times per minute. keep it running for an hour	Characteristics keep stability	
7	Leakage at high temperature	Stored under temperature (60 $^{\circ}$ C) for 3 days	No leakage allowed	
8	Over discharge Test	After 2.0v end-voltage, continuously discharged for 5 hours	No leakage allowed	

5. 【CUTAWAY DIAGRAM OF 3.0V LITHIUM MANGANESE DIOXIDE BUTTON CELL】

3. 0V 锂—二氧化锰扣式电池剖面图

Cutaway Diagram of 3.0V Lithium Manganese Dioxide Button Cell

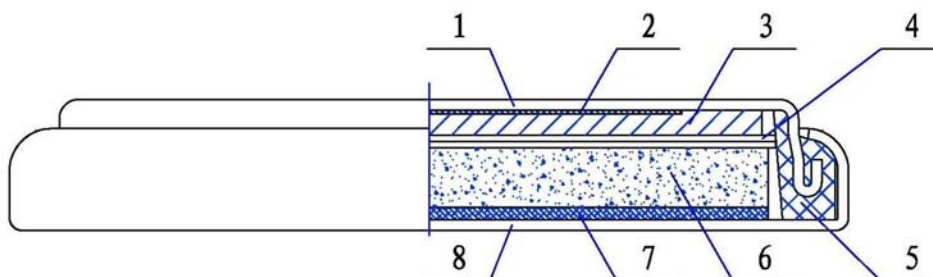

- | | | | |
|-----------------|-----------------------------|------------------------------|---------------|
| 1、负极壳 | 2、负极集流网 | 3、负极锂片 | 4、隔膜 |
| 5、密封胶圈 | 6、正极片 | 7、正极集流网 | 8、正极壳 |
| 1、Cathode Shell | 2、Cathode collector net | 3、Cathode (slice of lithium) | 4、Septum |
| 5、Gasket | 6、Anode(MnO ₂) | 7、Anode collector net | 8、Anode shell |



6. 【DISCHARGE CHARACTERISTICS】

CR2032 (210mAh)

外形 APPEARANCE



规格 SPECIFICATIONS

型号 Model	CR2032	尺寸 Dimensions(mm)
标称电压 Nominal Voltage	3(V)	
标称容量 Nominal Capacity	220 (mAh)	
标准电阻 Load Resistance	15 (KΩ)	
重量 Weight	3.0(g)	
使用温度 Using Temperature	-20℃~60℃	

STANDARD CHARACTERISTICS

