

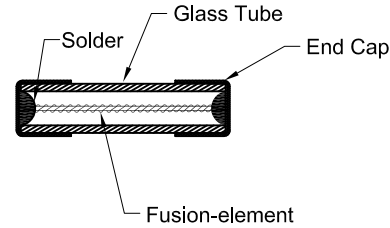


# Dimensions in mm


## MSG36



## MSG36-PA

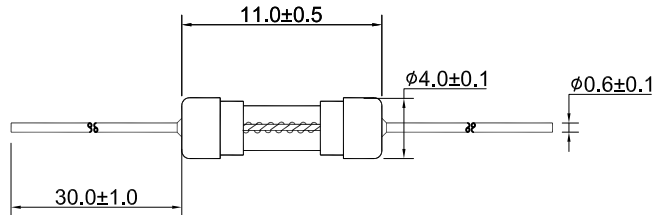

## MSG36-PR

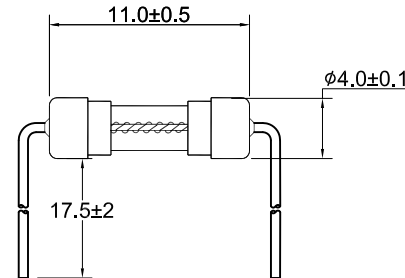

Rated Current	Breaking capacity	Rated Voltage	
100mA	@125V/AC 50A @250V/AC 50A	125V/250V	
125mA		125V/250V	
160mA		125V/250V	
200mA		125V/250V	
250mA		125V/250V	
300mA		125V/250V	
400mA		125V/250V	
500mA		125V/250V	
600mA		125V/250V	
630mA		125V/250V	
700mA	125V/250V		
800mA	125V/250V		
1A	@125V/AC 50A @250V/AC 50A	125V/250V	
1.25A		125V/250V	
1.5A		125V/250V	
1.6A		125V/250V	
2A		125V/250V	
2.5A		125V/250V	
3A		125V/250V	
3.15A		125V/250V	
3.5A		125V/250V	
4A		125V/250V	
5A	@125V/AC 50A @250V/AC 50A	125V/250V	
6A		125V/250V	
6.3A		125V/250V	
7A		125V/250V	
8A		125V/250V	
10A		125V/250V	
12A		125V	
13A		@125V/AC,DC 50A	125V
15A			125V



Test Specification according to Standard UL 248-1,14

### Electrical Characteristic

Rated Current	100%	200%	
	Min.	Min.	Max.
$I_n$			
0.1A-15A	4 h	1 S	60 S

<small>UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MM TOLERANCE DECIMALS      ANGULAR X ± 0.5            ± 2° XX ± 0.25 DO NOT SCALE DRAWING</small>	CUSTOMER NO.	<b>JENN FENG ELECTRIC INDUSTRIAL CO., LTD.</b> TITLE Miniature Cartridge Fuse 3.6x10mm Slow Blow Type PART NO. MSG36,MSG36-PA,MSG36-PR DRAWING NO. AA05062117
	DRAWN BY Jason	
	CHECKED BY	
	APPROVED BY 鄭文和	
P/N	DATE 2011.3.7	
REV C	SCALE	