

**SPECIFICATIONS**


Insulation Resistance:1000MΩ Min. At DC 500V.  
 Current Rating:15 Amp.  
 Dielectric Withstanding Voltage:AC 3100V For 1 minute.  
 Contact Resistance:8mΩ Max. at DC 100mA.  
 Operation Temperature:-55°C to +105°C

**MATERIAL**




Housing:Thermoplastic Polyester Glass Filled (UL94V-0)  
 Contacts:Copper Alloy

**ORDER INFORMATION**




5 D I N R L 2 F N M - 1 5 X X W A A 0 1

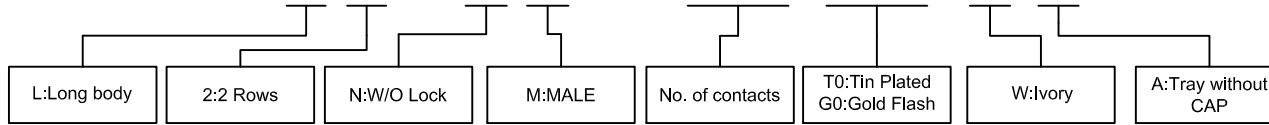

AMTEK 糧德  
 2019.04.01  
 Released DCC

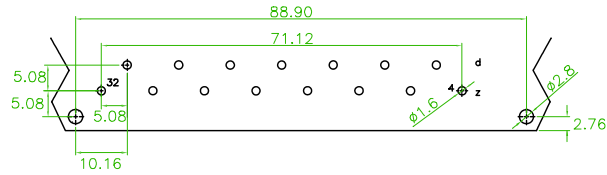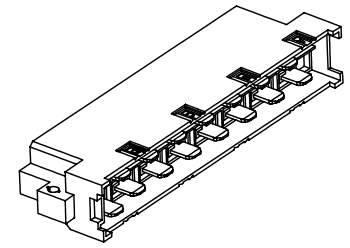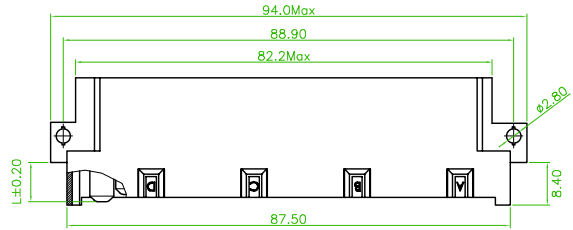

Recommended PCB Layout  
 (PCB TOLERANCE ±0.1)

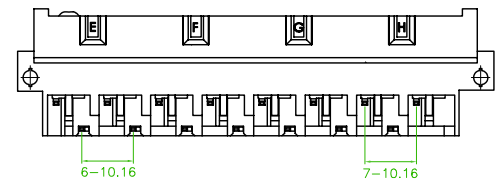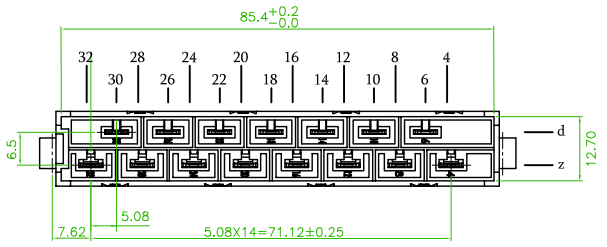

CONTACTS No.	L
Z4,Z8,Z12,Z16,Z20,Z24,Z28	6.00
Z32	7.65
d6,d10,d14,d18,d22,,d26,d30	6.00

Old Part No.:DINH15-M151XA-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	Din41612 2-R R/A DIP TYPE			頁數 Page	1/1
	品號 PART NO.	5DINRL2FNM-15XXWAA-01			繪圖 DRAWN	Sinnys 2011/02/15
	圖號 DRAWING NO.	GN153-AA332	版本 REV.	A	核對 CHECKED	Josh 2017/12/06
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2017/12/06
	公差 TOLERANCE	.X ± 0.25 .XX ± 0.15	單位 UNIT	mm	THIRD ANGLE PROJECTION	