

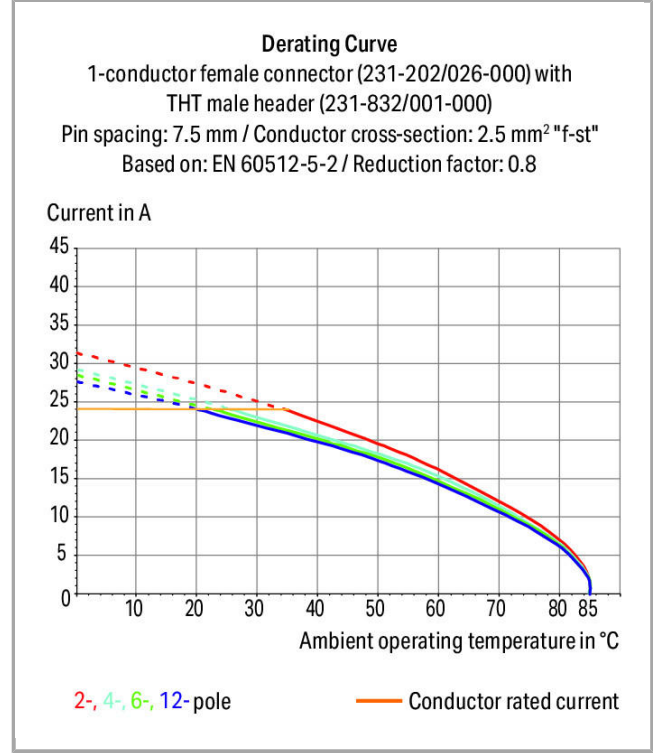


Veri sayfası | Ürün numarası: 231-703/026-000

1-conductor female plug; 2.5 mm²; Pin spacing 7.62 mm; 3-pole

www.wago.com/231-703/026-000

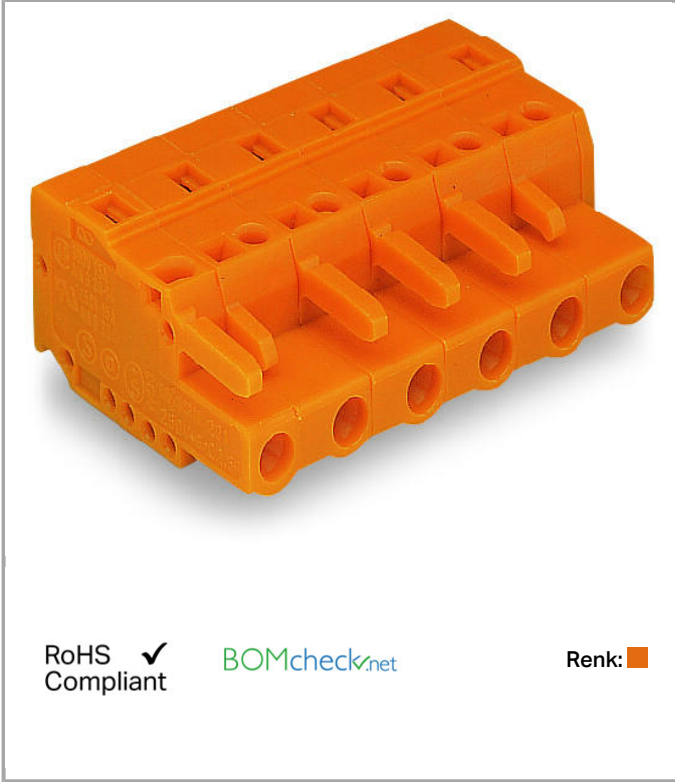

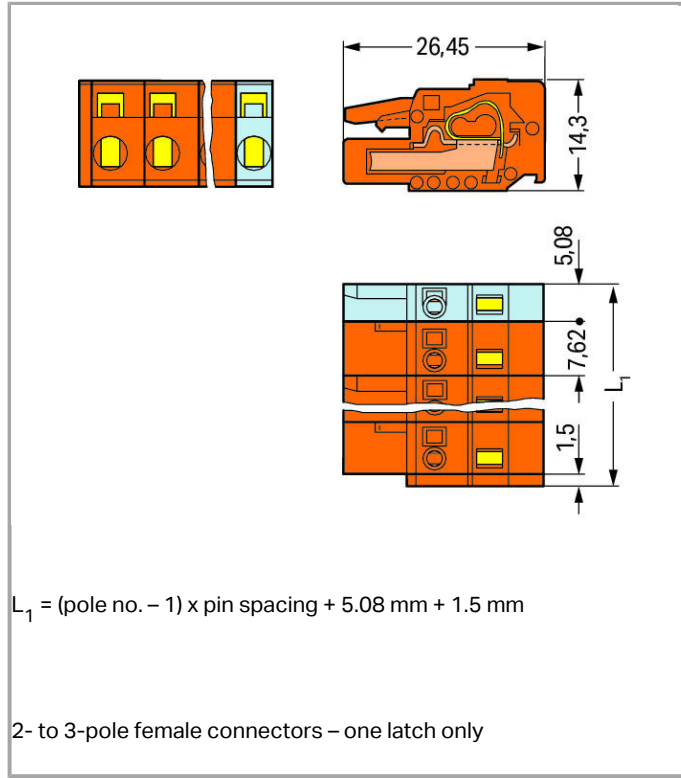

Ürün tanımı

- Tüm iletken tipleri için üniversal bağlantı
- Dikey ve yatay CAGE CLAMP® işlemi ile kolay kablo ön-montajı ve ünite üzerinde kablolama
- Entegre test yuvaları
- Kodlama seçeneği mevcut

Other variants can be requested via the WAGO sales department or, if necessary, configured at <https://configurator.wago.com/>: Gold-plated or partially gold-plated contact surfaces

Veri

Elektrik Verisi

Ratings per IEC/EN 60664-1

Anma gerilimi (III / 3)	500 V
Şok gerilimi (3)	6 kV
Anma gerilimi (III / 2)	630 V
Şok gerilimi (1)	6 kV
Anma gerilimi (II / 2)	1000 V
Şok gerilimi(2)	6 kV
Nominal akım	16 A



Approvals per UL 1059

Rated voltage UL (Use Group B)	300 V
Rated current UL (Use Group B)	15 A
Rated voltage UL (Use Group D)	300 V
Rated current UL (Use Group D)	10 A

Approvals per UL 1977

Rated voltage per UL 1977 (factory wiring only)	600 V
Rated current per UL 1977 (factory wiring only)	15 A

Approvals per CSA

Rated voltage CSA (Use Group B)	300 V
Rated current CSA (Use Group B)	15 A
Rated voltage CSA (Use Group D)	300 V
Rated current CSA (Use Group D)	10 A

Bağlantı verisi

Bağlantı teknolojisi	CAGE CLAMP®
Actuation type	Operating tool
Tek damarlı boylar	0,08 ... 2,5 mm ² / 28 ... 12 AWG
İnce bükümlü kablolar	0,08 ... 2,5 mm ² / 28 ... 12 AWG
İnce bükümlü kablolar, yalıtımlı yüksüklü	0,25 ... 1,5 mm ²
İnce bükümlü kablolar, yalıtımsız yüksüklü	0,25 ... 2,5 mm ²
Sıyırma uzunluğu	8 ... 9 mm / 0.31 ... 0.35 inch
Kutup sayısı	3
Toplam bağlantı noktası sayısı	3
Toplam potansiyel sayısı	3
Üründeki münferit bağlantı nesnesi sayısı	1
Seviye sayısı	1
Conductor entry direction to mating direction	0°

Geometrical Data

Pin aralığı	7,62 mm / 0.3 inch
Width	21,82 mm / 0.859 inch
Height	14,3 mm / 0.563 inch
Depth	26,45 mm / 1.041 inch

Plug connection

Contact type (pluggable connector)	Female connector/socket
------------------------------------	-------------------------

Connector connection type	for conductors
Mismating protection	No

Material Data

Renk	orange
Malzeme grubu	I
İzolasyon malzemesi	Polyamide 66 (PA 66)
UL 94'e göre tutuşabilirlik değeri	V0
Sıkıştırma yayı malzemesi	Chrome nickel spring steel (CrNi)
Kontakt materyali	Copper alloy
Kontakt kaplaması	kalay kaplamalı
Yangın yükü	0.102 MJ
Ağırlık	6.264 g

Environmental Requirements


Sınır sıcaklık aralığı	-60 ... +85 °C
------------------------	----------------

Ticari Veri


Product Group	3 (Multi Conn. System)
Country of origin	DE
GTIN	4044918351539

Onaylar / Belgeler


Country specific Approvals

Logo	Onay	İlave Onay Metni	Belge adı
	CB	IEC 61984	NL-39756
	DEKRA Certification B.V.		

Ship Approvals

Logo	Onay	İlave Onay Metni	Belge adı
	ABS	-	14-HG1241537-PDA
	American Bureau of Shipping		

UL-Approvals

Logo	Onay	İlave Onay Metni	Belge adı
	UR	UL 1059	E45172
	Underwriters Laboratories Inc.		



UR
Underwriters Laboratories Inc.

UL 1977

E45171

Uyumlu ürünler

Strain relief plate

Ürün no.: 232-683
Strain relief housing

www.wago.com/232-683

Marking accessories

Ürün no.: 210-331/762-202

Marking strips; as a DIN A4 sheet; MARKED; 1-16 (100x); Height of marker strip: 2.3 mm/0.091 in; Strip length 182 mm; Horizontal marking; Self-adhesive

www.wago.com/210-331/762-202

Ürün no.: 210-332/762-020

Marking strips; as a DIN A4 sheet; MARKED; 1-20 (80x); Height of marker strip: 3 mm; Strip length 182 mm; Horizontal marking; Self-adhesive

www.wago.com/210-332/762-020

Ürün no.: 210-833

Marking strips; on reel; 6 mm wide; plain; Self-adhesive

www.wago.com/210-833



Ürün no.: 210-834

Marking strips; on reel; 5 mm wide; plain; Self-adhesive

www.wago.com/210-834

Insulation stop

Ürün no.: 231-673

Insulation stop; 0.08-0.2 mm² / 0.2 mm² "s"

www.wago.com/231-673

Ürün no.: 231-674

Insulation stop; 0.25 - 0.5 mm²

www.wago.com/231-674

Ürün no.: 231-675

Insulation stop; 0.75 - 1 mm²

www.wago.com/231-675

General accessories

Ürün no.: 231-669

Lockout caps; for covering unused clamping units

www.wago.com/231-669

check

Ürün no.: 210-136

Test plug; 2 mm Ø; with 500 mm cable

www.wago.com/210-136

Ürün no.: 210-137
















Test plug; 2.3 mm Ø; with 500 mm cable











www.wago.com/210-137

Ürün no.: 231-662

Test plugs for female connectors; for 7.5 mm and 7.62 mm pin spacing

www.wago.com/231-662

ferrule		
	Ürün no.: 216-101 Ferrule; Sleeve for 0.5 mm ² / AWG 22; uninsulated; electro-tin plated	www.wago.com/216-101
	Ürün no.: 216-102 Ferrule; Sleeve for 0.75 mm ² / AWG 20; uninsulated; electro-tin plated	www.wago.com/216-102
	Ürün no.: 216-103 Ferrule; Sleeve for 1 mm ² / AWG 18; uninsulated; electro-tin plated	www.wago.com/216-103
	Ürün no.: 216-104 Ferrule; Sleeve for 1.5 mm ² / AWG 16; uninsulated; electro-tin plated	www.wago.com/216-104
	Ürün no.: 216-106 Ferrule; Sleeve for 2.5 mm ² / AWG 14; uninsulated; electro-tin plated	www.wago.com/216-106
	Ürün no.: 216-121 Ferrule; Sleeve for 0.5 mm ² / AWG 22; uninsulated; electro-tin plated	www.wago.com/216-121
	Ürün no.: 216-122 Ferrule; Sleeve for 0.75 mm ² / AWG 20; uninsulated; electro-tin plated	www.wago.com/216-122
	Ürün no.: 216-123 Ferrule; Sleeve for 1 mm ² / AWG 18; uninsulated; electro-tin plated	www.wago.com/216-123
	Ürün no.: 216-124 Ferrule; Sleeve for 1.5 mm ² / AWG 16; uninsulated; electro-tin plated	www.wago.com/216-124
	Ürün no.: 216-131 Ferrule; Sleeve for 0.25 mm ² / AWG 24; uninsulated; electro-tin plated	www.wago.com/216-131
	Ürün no.: 216-132 Ferrule; Sleeve for 0.34 mm ² / AWG 24; uninsulated; electro-tin plated	www.wago.com/216-132
	Ürün no.: 216-141 Ferrule; Sleeve for 0.5 mm ² / 20 AWG; uninsulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 1/08.92	www.wago.com/216-141
	Ürün no.: 216-142 Ferrule; Sleeve for 0.75 mm ² / 18 AWG; uninsulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 1/08.92	www.wago.com/216-142
	Ürün no.: 216-143 Ferrule; Sleeve for 1 mm ² / AWG 18; uninsulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 1/08.92	www.wago.com/216-143
	Ürün no.: 216-144 Ferrule; Sleeve for 1.5 mm ² / AWG 16; uninsulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 1/08.92	www.wago.com/216-144
	Ürün no.: 216-151 Ferrule; Sleeve for 0.25 mm ² / AWG 24; uninsulated; electro-tin plated	www.wago.com/216-151
	Ürün no.: 216-152 Ferrule; Sleeve for 0.34 mm ² / AWG 24; uninsulated; electro-tin plated	www.wago.com/216-152
	Ürün no.: 216-201 Ferrule; Sleeve for 0.5 mm ² / AWG 22; insulated; electro-tin plated	www.wago.com/216-201

	Ürün no.: 216-202 Ferrule; Sleeve for 0.75 mm ² / 18 AWG; insulated; electro-tin plated	www.wago.com/216-202
	Ürün no.: 216-203 Ferrule; Sleeve for 1 mm ² / AWG 18; insulated; electro-tin plated	www.wago.com/216-203
	Ürün no.: 216-204 Ferrule; Sleeve for 1.5 mm ² / AWG 16; insulated; electro-tin plated	www.wago.com/216-204
	Ürün no.: 216-221 Ferrule; Sleeve for 0.5 mm ² / 20 AWG; insulated; electro-tin plated	www.wago.com/216-221
	Ürün no.: 216-222 Ferrule; Sleeve for 0.75 mm ² / 18 AWG; insulated; electro-tin plated	www.wago.com/216-222
	Ürün no.: 216-223 Ferrule; Sleeve for 1 mm ² / AWG 18; insulated; electro-tin plated	www.wago.com/216-223
	Ürün no.: 216-224 Ferrule; Sleeve for 1.5 mm ² / AWG 16; insulated; electro-tin plated	www.wago.com/216-224
	Ürün no.: 216-241 Ferrule; Sleeve for 0.5 mm ² / 20 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90	www.wago.com/216-241
	Ürün no.: 216-242 Ferrule; Sleeve for 0.75 mm ² / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90	www.wago.com/216-242
	Ürün no.: 216-243 Ferrule; Sleeve for 1 mm ² / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90	www.wago.com/216-243
	Ürün no.: 216-244 Ferrule; Sleeve for 1.5 mm ² / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90	www.wago.com/216-244
	Ürün no.: 216-262 Ferrule; Sleeve for 0.75 mm ² / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90	www.wago.com/216-262
	Ürün no.: 216-263 Ferrule; Sleeve for 1 mm ² / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90	www.wago.com/216-263
	Ürün no.: 216-264 Ferrule; Sleeve for 1.5 mm ² / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90	www.wago.com/216-264
	Ürün no.: 216-284 Ferrule; Sleeve for 1.5 mm ² / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90	www.wago.com/216-284
	Ürün no.: 216-301 Ferrule; Sleeve for 0.25 mm ² / AWG 24; insulated; electro-tin plated	www.wago.com/216-301
	Ürün no.: 216-302 Ferrule; Sleeve for 0.34 mm ² / 22 AWG; insulated; electro-tin plated	www.wago.com/216-302
	Ürün no.: 216-321 Ferrule; Sleeve for 0.25 mm ² / AWG 24; insulated; electro-tin plated	www.wago.com/216-321
	Ürün no.: 216-322 Ferrule; Sleeve for 0.34 mm ² / 22 AWG; insulated; electro-tin plated	www.wago.com/216-322



tools

Ürün no.: 231-131

Push-button; for female and male connectors; loose

www.wago.com/231-131

Ürün no.: 231-291

Operating tool; for male and female connectors with CAGE CLAMP®; loose

www.wago.com/231-291

Dosya İndirme

CAD/CAE - Smart Data

CAD data

3D Download 231-703/026-000

URL

İndir

Değişikliklere tabidir.

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: info.de@wago.com | Web: www.wago.com

Ürünlerimizle ilgili sorularınız mı var?

{0} numaralı telefondan sizinle konuşmaktan mutluluk duyarız.