

Super Slim LED Power Supply

CV Version



Reliable Technical Data

- Rated Input Voltage:200-240VAC
- Input Frequency:50Hz
- Output Power:40W
- Body:PC
- Open Circuit;Short Circuit;Over Load;
- Over Heat Protection


- Safety According to EN61347-1,EN61347-2-13
- EMI According to EN55015
- EMF According to EN62493-2010
- EMS According to EN61000-3-2;EN61000-3-3;EN61547
- Approbation Mark:CE ROHS;TUV;C-Tick



CC Version



Dimension in mm

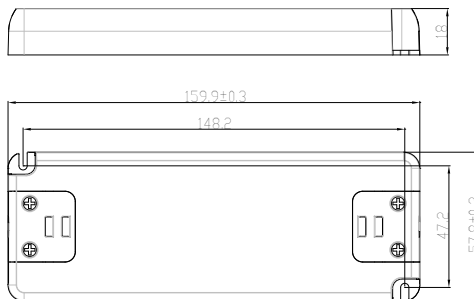

Characteristics

Rated input voltage: AC200-240V 50Hz (power factor measured at AC230V and full load)

Model No.	Constant out voltage	Load	Max output Current	PF	Ta	Tc	L×W×H	Approval
SNP40-12VF	12V	0-40W	3.33A	≥0.9	45℃	85℃	159.9X57.8X18	TUV pending
SNP40-24VF	24V	0-40W	1.67A	≥0.9	45℃	80℃	159.9X57.8X18	TUV pending

Model No.	Constant output Current	Load	Max output Voltage	PF	Ta	Tc	L×W×H	Approval
SNP40-500IF	500mA	20-40W	80VDC	≥0.9	45℃	80℃	159.9X57.8X18	TUV pending
SNP40-700IF	700mA	20-40W	57.1VDC	≥0.9	45℃	80℃	159.9X57.8X18	TUV pending
SNP40-1050IF	1050mA	20-40W	38.0VDC	≥0.9	45℃	80℃	159.9X57.8X18	TUV pending
SNP40-1400IF	1400mA	20-40W	28.5VDC	≥0.9	45℃	80℃	159.9X57.8X18	TUV pending
SNP40-2100IF	2100mA	20-40W	19.0VDC	≥0.9	45℃	80℃	159.9X57.8X18	TUV pending