


SNP15-350ILT & SNP15-700ILT



Dimension in mm

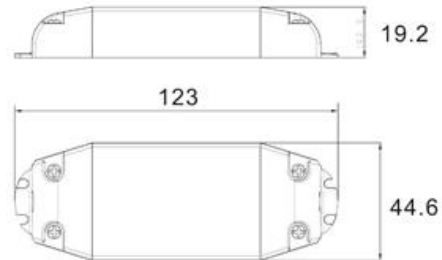

Reliable Technical Data

- Rated Input Voltage: 220-240VAC
- Input Frequency: 50Hz
- Output Voltage: 15W
- Dimensions: L123Xw44.6xH19.2mm
- Body: PC
- Open Circuit; Short Circuit; Over Load
- SAA: TUV16233EA
- Safety According to: EN61347-1, EN61347-2-13
- EMI According to: EN55015
- EMS According to: EN61000-3-2, EN61000-3-3, EN61547
- Approbation Mark: CE ROHS; TUV; C-Tick

Characteristics

Rated Input: AC220-240V 50Hz (power factor measured at AC230V and full load)

Model No.	Constant out Current	Load	Max output Voltage	PF	Ta	Tc	LxWxH
SNP15-350ILT	350mA	12.15W	42VDC	0.8	45° C	80° C	123x44.6x19.2
SNP15-700ILT	700mA	12.15W	22VDC	0.8	45° C	80° C	123x44.6x19.2