




Semi Flexible Solar Panel

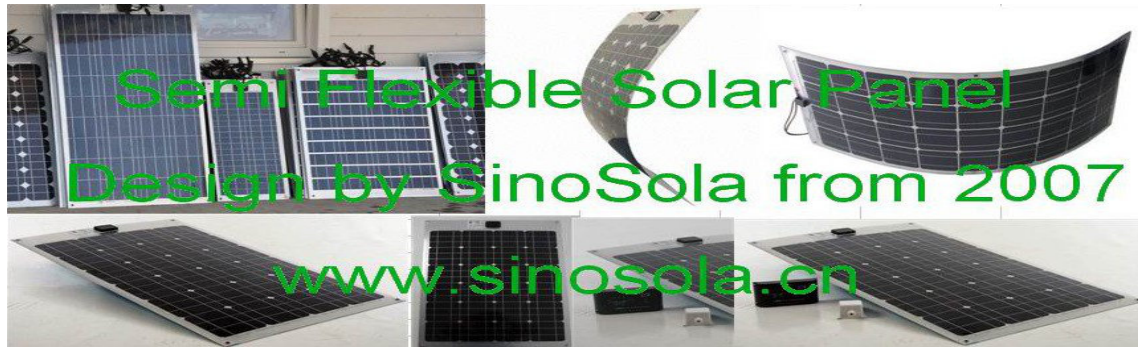

Installation & Advantage

Sinosola Semi panel with four installation holes in the corners, Also can use adhesive tape, screws to mount
 Light weight for easy carrying
 Waterproof, perfect to use on yacht, car, boat, snow mobile, golf-cart.... etc
 *High efficiency crystalline solar panel

Field of application



Electrical Characteristics

Type	SAFP-150W
Maximum power (Wp)	150
Maximum power voltage (V)	18.97
Maximum power current (A)	7.91
Open circuit voltage (V)	22.76
Short circuit current (A)	8.54
Cell Efficiency (%)	17.00%
FF (%)	≥74%
Maximum system voltage (V)	600V
Temperature Range	-40°C to +85°C
Power tolerance (%)	±5%
Standard Test Conditions	1000W/m ² , AM1.5, 25°C

Mechanical Characteristics

Solar cell	Poly
Size of module (mm)	1100*990
Weight per piece (kg)	4.5
Connectors	MC4
Cables	0.9m cable

Temperature coefficients

Nominal Operating Cell Temperature	45±2°C
Temperature coefficients β (Voc)	Between -0.24%/°C to -0.33%/°C
Temperature coefficients γ (Pm)	Between -0.37%/°C to -0.42%/°C
Temperature coefficients α (Isc)	Between 0.03%/°C to 0.04%/°C

Contact

Yuhuan Sinosolar S&T Co.,Ltd
 No.53 Bingang Industrial Park,Shamen Town,
 Yuhuan,Zhejiang China 317607

TEL:86-139-89663637 FAX:86-576-87339882
 Web: www.sinosola.cn
 Email: michael@sinosola.cn