


APPROVALS: RoHS (submitted) (submitted)



PART NO.: GT128-5.0

- PCB Screw Terminal Block
- Nominal Current (IEC): 18A
- Rated Voltage (IEC): 250V
- Number of Positions: 2P,3P-24P
- Standard Color: Green
- Contact Surface: Tin
- Connection Method: Screw Connection

DRAWINGS:

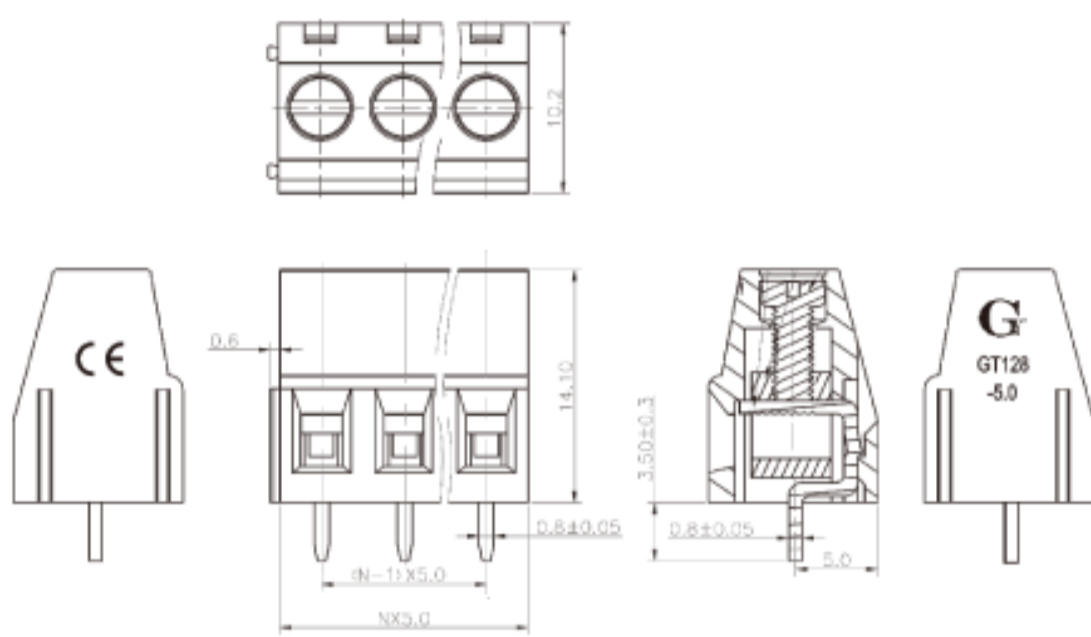

www.cngolten.com
golten@cngolten.com

Tel: +86-574-63204122

1/3
18/5/2013

TECHNICAL DATA:

Electrical		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	15A	18A
Wire range	24-12AWG	2.5mm ²
With standing voltage	AC2000V/1Min	
Mechanical		
Torque	0.4Nm(3.5Lb-In.)	
Ambient temperature	-40°C~+105°C	
Strip length	7mm	
Dimensions		
Pitch	5.0mm(.197")	
Poles	2P, 3P-24P	
Material		
Housing	PA66,UL94V-0	
Screws	M2.5,steel,Cr ³⁺ Zn Plated	
Pin header	Brass,Tin plated	
Wire guard	Brass,Ni Plated	

APPLICATION:


Elevator Industry Security Instrument Machinery Energy Communication
Lighting Construction Electrical

www.cngolten.com
golten@cngolten.com

Tel: +86-574-63204122

2/3
18/5/2013

HOW TO ORDER:

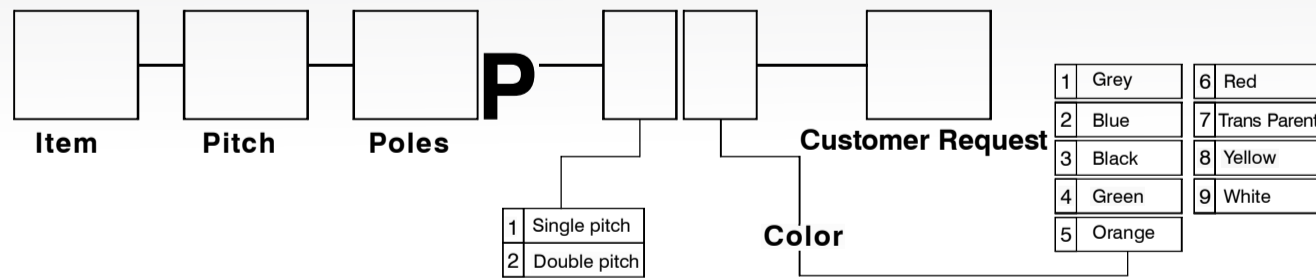

PACKING:

Item	Number of Poles	PCS/Box A	PCS/Box B	PCB/Carton	GW/CTNS(KG)
GT128-5.0	2	500		6000	15
	3	400		4800	20
	4		1300	5200	25
	5		1100	4400	29
	6		875	3500	27
	7		775	3100	28
	8		650	2600	27
	9		600	2400	27
	10		525	2100	27
	11		475	1900	27
	12		425	1700	27
	13		425	1700	29
	14		350	1400	26
	15		350	1400	27
	16		325	1300	28
	17		300	1200	27
	18		275	1100	26
	19		225	1100	27
	20		225	900	24
	21		225	900	25
	22		225	900	26
	23		200	900	27
	24		200	800	25

Remark: Box A Dimension: 20*13.5*7(cm); Box B Dimension: 26*20*10(cm)
Carton Dimension: 42*28*23(cm)

www.cngolten.com
golten@cngolten.com

Tel: +86-574-63204122

3/3
18/5/2013