


APPROVALS: RoHS (submitted) (submitted)

PART NO.: 2EGTVC-5.08



- Pluggable Terminal Block,
- Nominal Current (IEC): 20A
- Rated Voltage (IEC): 320V
- Number of Positions: 2P-24P
- Standard Color: Green
- Contact Surface: Tin
- Connection Method: Soldering

DRAWINGS:

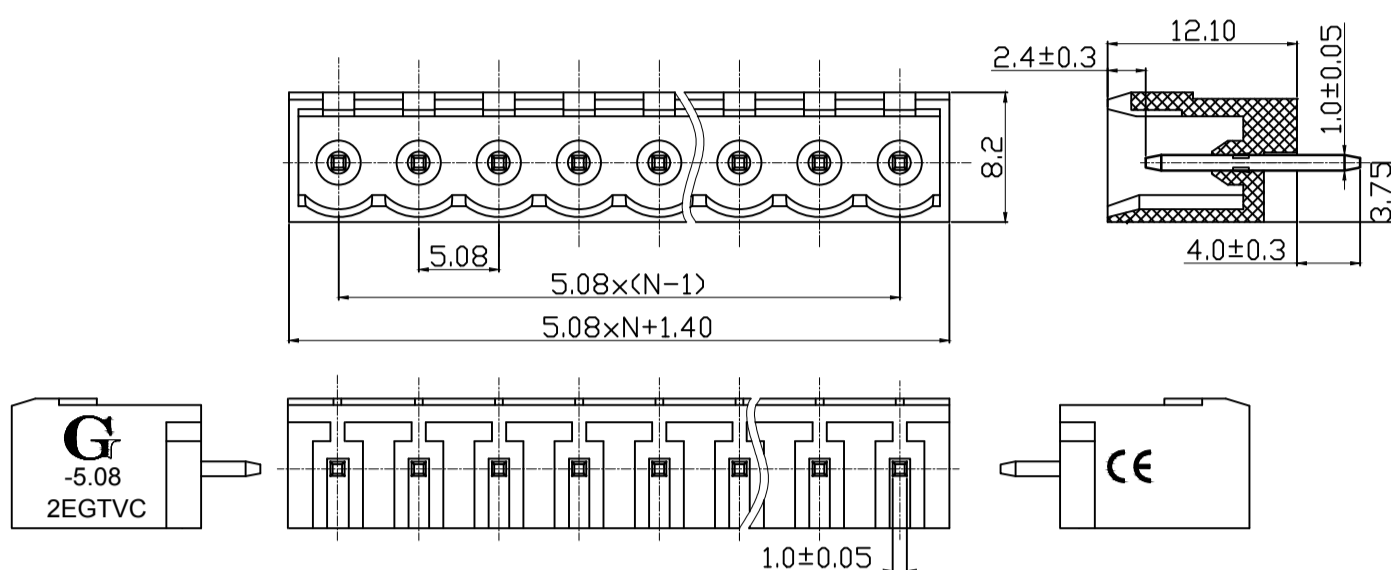

www.cngolten.com
golten@cngolten.com

Tel: +86-574-63204122

1/3
18/5/2013

TECHNICAL DATA:

Electrical		
Standard	UL	IEC
Rated voltage	300V	320V
Rated current	15A	20A
Rated impulse voltage	4.0KV	
Mechanical		
Ambient temperature	-40°C~+105°C	
Dimensions		
Pitch	5.08mm(.200")	
Poles	2P-24P	
Material		
Housing	PA66,UL94V-0	
Pin header	Brass,Tin plated	

APPLICATION:

Elevator, Industry, Security, Instrument, Machinery, Energy, Communication, Lighting, Construction, Electrical

MATCHING PARTS:


female parts \ male parts	2EGTK-5.08	2EGTKM-5.08	2EGTKA-5.08	2EGTKAM-5.08	2EGTKB-5.08	2EGTKBM-5.08	2EGTKD-5.08	2EGTKDM-5.08
2EGTVC-5.08	•	•	•	•	•	•	•	•

www.cngolten.com
golten@cngolten.com

Tel: +86-574-63204122

2/3
18/5/2013

HOW TO ORDER:

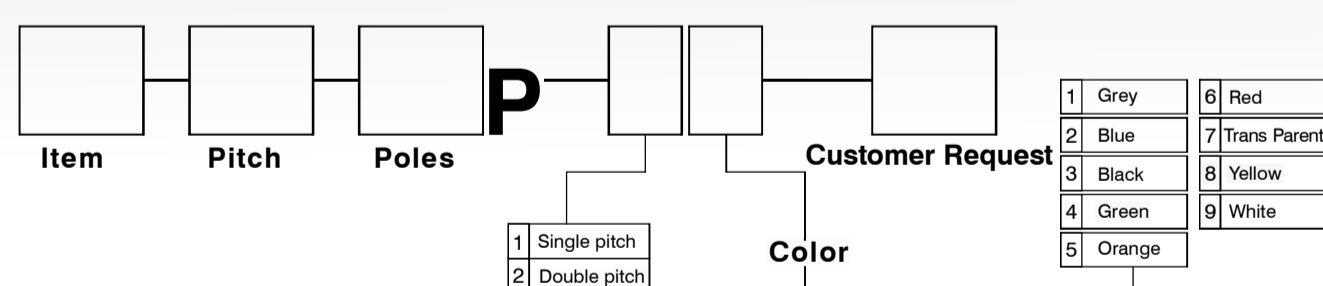

PACKING:

Item	Number of Poles	PCS/Box A	PCS/Box B	PCB/Carton	GW/CTNS(KG)
2EGTVC-5.08	2		2000	8000	6
	3		1200	4800	7
	4		1000	4000	7
	5		800	3200	7
	6		1150	4600	11
	7		1000	4000	11
	8		850	3400	11
	9		775	3100	12
	10		675	2700	10
	11		625	2500	11
	12		575	2300	10
	13		500	2000	11
	14		475	1900	11
	15		450	1800	11
	16		425	1700	10
	17		400	1600	11
	18		375	1500	10
	19		375	1500	12
	20		300	1200	10
	24		275	1100	10

Remark: Box A Dimension: 20*13.5*7(cm); Box B Dimension: 26*20*10(cm)
Carton Dimension: 42*28*23(cm)

www.cngolten.com
golten@cngolten.com

Tel: +86-574-63204122

3/3
18/5/2013