

SMD Buzzer KS-090025H-03027



- ProductName SMD Buzzer
- ProductModel KS-090025H-03027
- Specifications 10.5*9.0*2.5mm
- Manufacturer cosson

Detailed


PHOTO	ITEM	UNITS	KS-090025H-03027
	RATED VOLTAGE 额定电压	V _{p-p}	3.0
	OPERATING VOLTAGE 电压范围/max	V _{p-p}	2.0 ~ 5.0
	FREQUENCY OF OUTPUT SIGNAL COIL 输出频率	HZ	2731 ± 300
	RATED CURRENT (MAX) 消耗电流 (最大)	mA	80



KS-090025H-03027

COIL RESISTANCE 阻抗	Ω	16±3
SOUND PRESSURE LEVEL输出音压 (最小)	DB	85
CASE MATERIAL AND COLOUR R 外壳材质及颜色	/	LCP (Black)
WEIGHT重量	G	0.8
OPERATING TEMPERATURE RANGE操作温度	℃	-25 ~ +70
STORAGE TEMPERATURE RANGE储存温度	℃	-30 ~ +80
*Applying rated voltage (Resonant frequency, 1/2 duty, Square wave)		

OUTLINE DRAWING : UNIT : mm

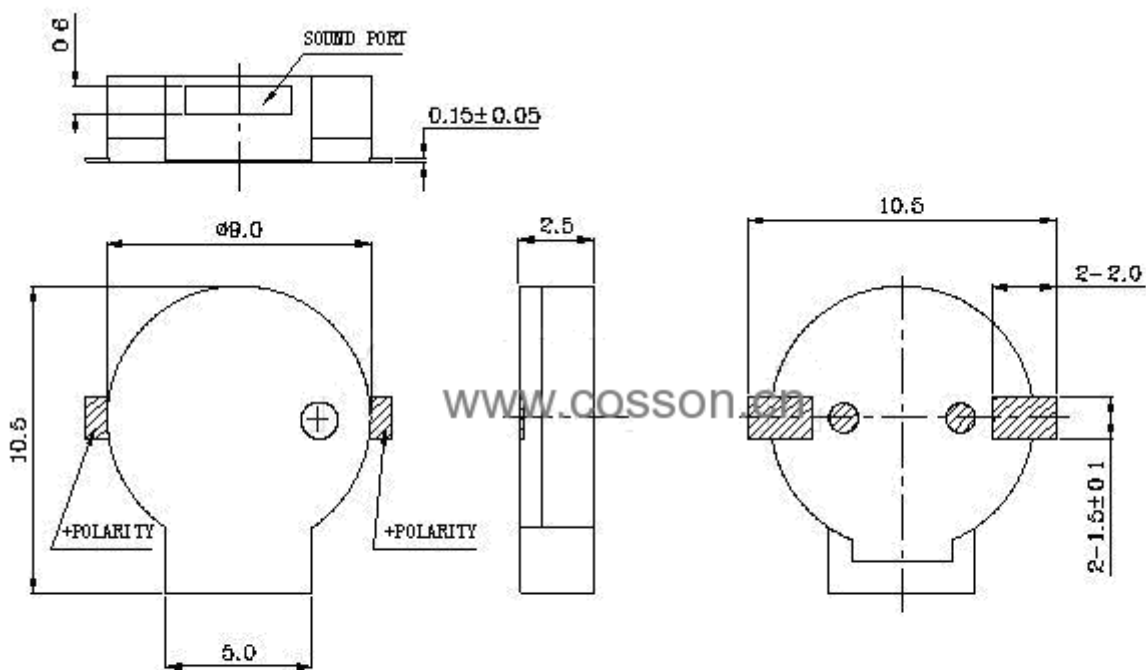

Unit : mm Tol: ±0.3

FREQUENCY CHARACTERISTICS



Buzzer		Soldering Parameter 焊接参数			
		Temp.(OC)	Time(Sec.)	Times	
Soldering process 焊接工艺					
Inclusive		Reflow soldering	230±10	above 1700C time 40~70	2
Lead 含铅		Wave soldering	245±5	3~6	1~2
		Manual soldering	330±10	1~2	1~2
Lead Free 无铅		Reflow soldering	245±15	above 1800C time 40~70	3
	★	Wave soldering	260±5	4~8	2~3
	★	Manual soldering	350±10	1~3	2~3