

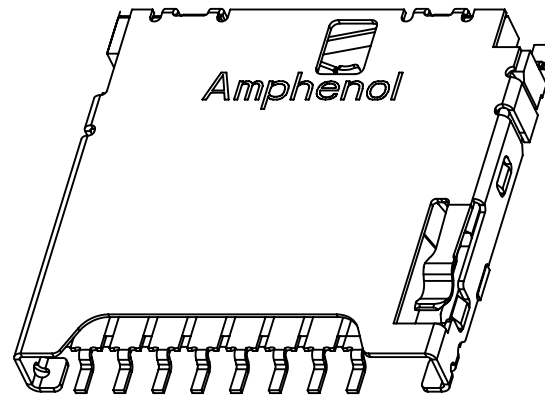
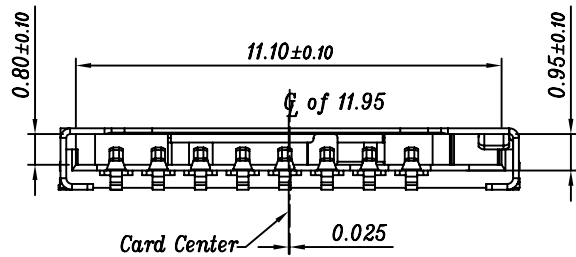
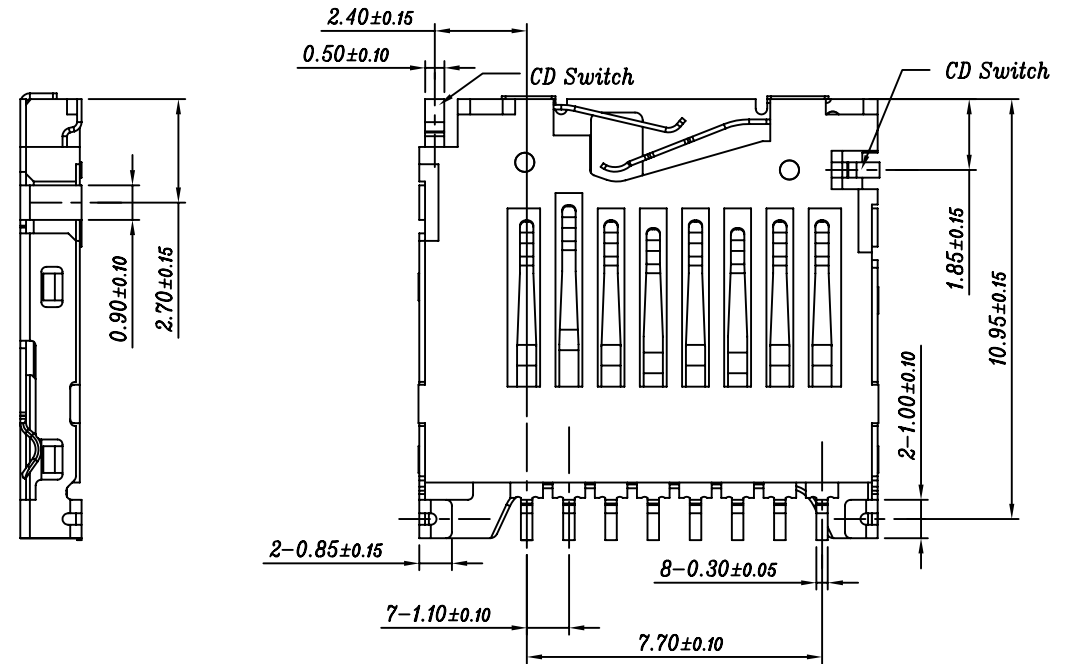


REV.	ECN.NO.	MODIFY.CONTENT	DATE
2	S0907005	Change The Switch Pin	7/01'09
3	ECN09110082	Widen switch pin	11/24'09
A	ECM0030260	Rev.A release	03/05'10

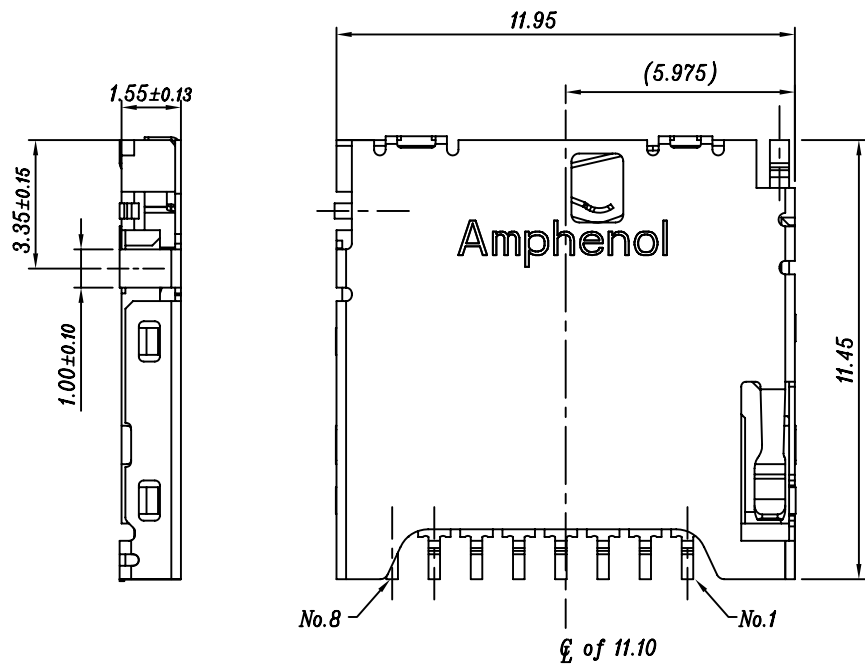


GENERAL	TOLERANCE	FILE.NO.	114-00841	PART.NO.	114-00841-68	DRAWN	Ray lee	MATERIAL	SCALE	5:1	
X.±0.50	x.±5°	REV.	A	TITLE	Micro SD None Push Connector Top Mount	CHECKED	Jane.Yu	DATE	03/05'2010	UNIT	MM
.X±0.38	.x'±2°	SIZE		SHEET	1/2	APPROVED	Jane.Yu	Amphenol Shouhmin Industry			
.XX±0.25	.xx'±1°	A4									

REV.	ECN.NO.	MODIFY.CONTENT	DATE
2	S0907005	Change The Switch Pin	7/01'09
3	ECN09110082	Widen switch pin	11/24'09
A	ECM0030260	Rev.A release	03/05'10

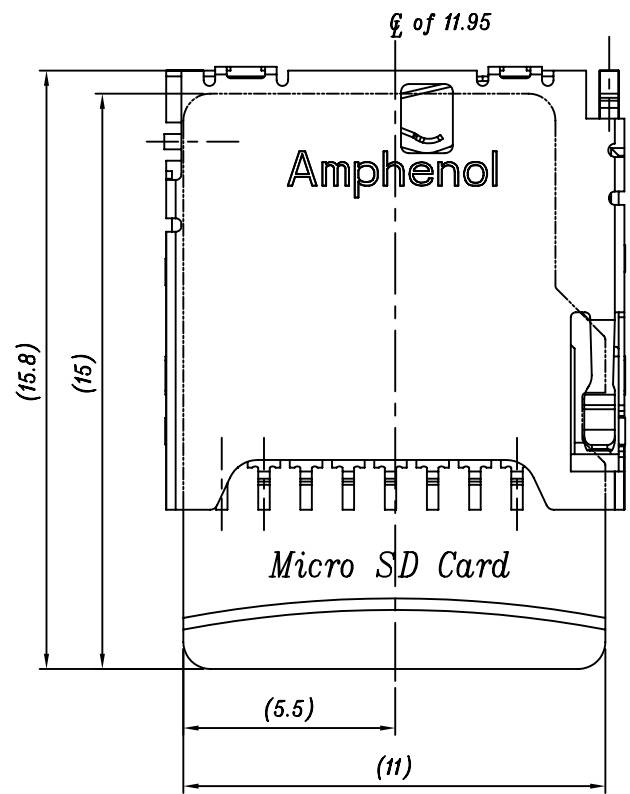

PIN Assignments

PIN NO.	Micro SD
1	Date Line[Bit 2]
2	Card Detect/ Date Line[Bit 3]
3	Command/Response
4	Supply voltage
5	Clock
6	Supply voltage ground
7	Date Line[Bit 0]
8	Date Line[Bit 1]

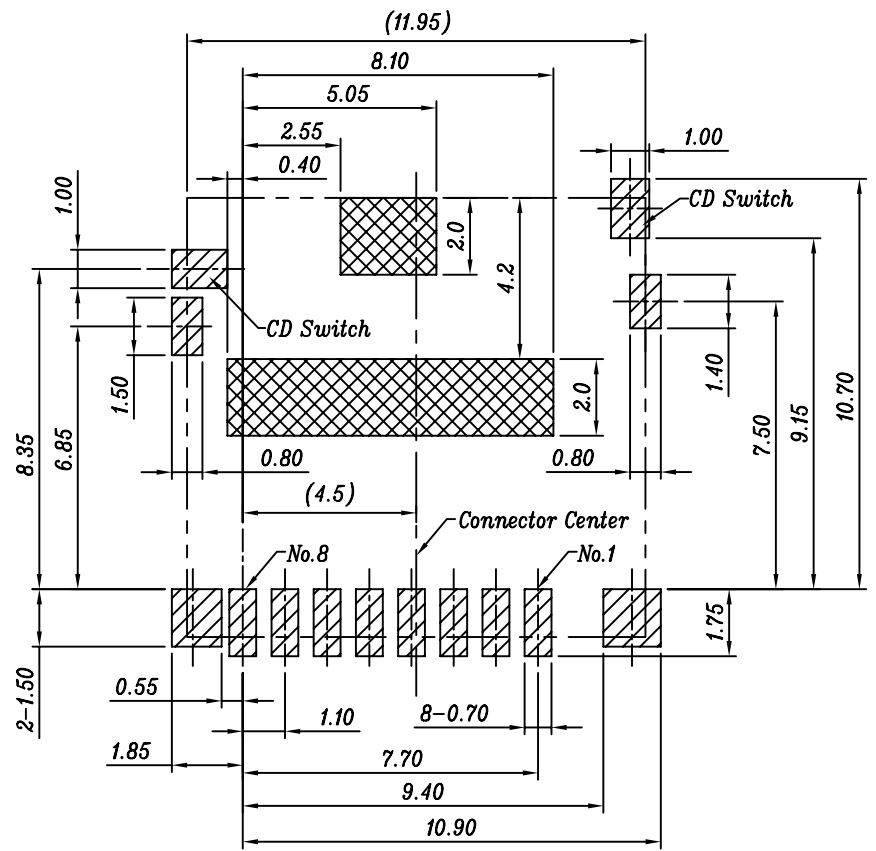

RECOMMENDED P.C.B LAYOUT

P.C.B TOLERANCE: ±0.05

- Connector Area
- PAD Area
- Pattern Prohibited Area

- Note:**
- Material:**
Housing: LCP Black UL 94V-0
Contact: Copper alloy
Shell: Stainless steel
 - Plating:**
Contact Area: Plating Au
Solder tail: Plating Tin
Shell: Plating weldable Ni
 - Tail Coplanarity 0.12mm Max.**
 - The Part must compliant AMSI'S ROHS SPEC.**

GENERAL TOLERANCE	FILE.NO.	PART.NO.	DRAWN	MATERIAL	SCALE
X±0.50	114-00841	114-00841-68	Ray lee		5:1
.X±0.38	REV. A	TITLE	Jane.Yu	DATE	03/05'2010
.XX±0.25	SIZE A4	SHEET	Jane.Yu	Amphenol Shouhmin Industry	
x.*±5°				UNIT	MM
.x.*±2°					
.xx.*±1°					

