
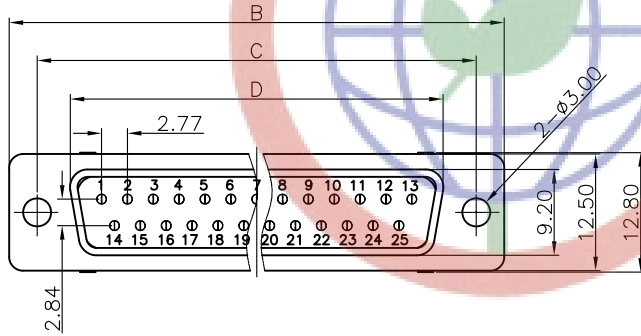



REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 08/13/07'	~	



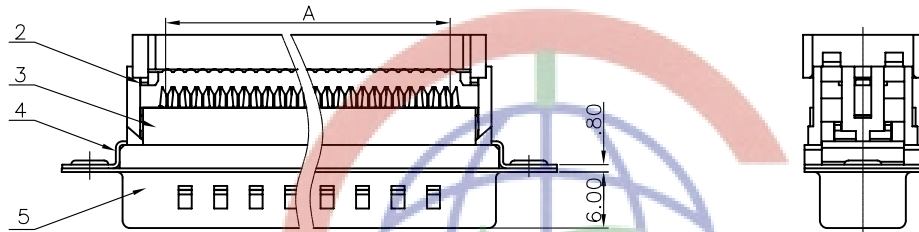


Position	A±0.1	B±0.2	C±0.2	D±0.2		E±0.2
				Male	Female	
9P	10.16	30.80	24.99	17.90	16.33	19.00
15P	17.78	39.14	33.32	26.50	24.66	27.34
25P	30.48	53.04	47.04	40.00	38.38	41.24
37P	45.72	69.32	63.50	56.50	54.84	57.52

- NOTES:
- ELECTRICAL CHARACTERISTICS:
    - CONTACT RESISTANCE: 30mΩ Max.INITIAL.
    - DIELECTRIC WITHSTANDING VOLTAGE:500V AC(rms) FOR 1 MINUTE.
    - INSULATION RESISTANCE:1000MΩ Min.
  - MECHANICAL CHARACTERISTICS:
    - DURABILITY: 300 CYCLES.
  - ENVIRONMENT CHARACTERISTICS:
    - TEMPERATURE: -40°C~+105°C.
  - PRODUCT NUMBER CODE: DS1036-03 -XX X X X X
- CONTACT PLATING:  
Si: SELECTIVE GOLD FLASH
- HOUSING COLOR:  
U:BLUE  
B:BLACK
- STRAIN RELIEF:  
P:W/  
N:W/O
- CONNECTOR TYPE:  
M:MALE  
F:FEMALE
- No.OF CONTACTS:  
09:9pos  
15:15pos  
25:25pos  
37:37pos

ITEM	PART NAME	MATERIAL	FINISHED
1	UPPER COVER	PBT 30%G.F	UL 94 V-0
2	MIDDLE COVER	PBT 30%G.F	UL 94 V-0
3	HOUSING	PBT 30%G.F	UL 94 V-0
4	WASHER	STEEL	Nickel Plated
5	SHELL	STEEL	Nickel Plated

MALE

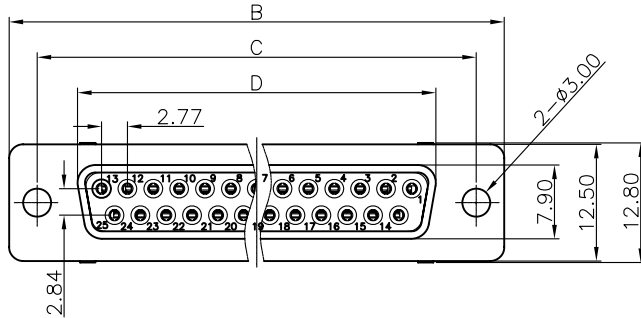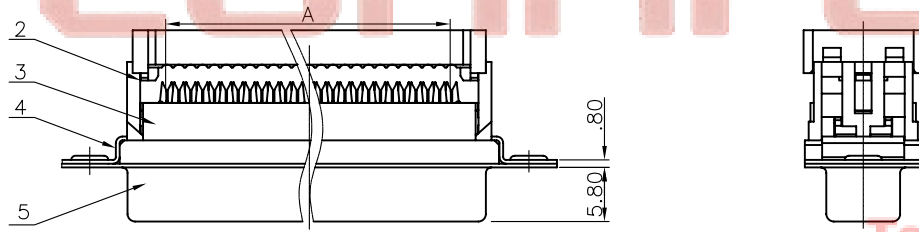

Tel: 86-574-63508787


Fax: 86-574-63510817

Email: sale@zhenqin.com.cn

http://www.zhenqin.com.cn

Address: Wuxi Xiaoyang Town, Jiangsu Province, China

FEMALE

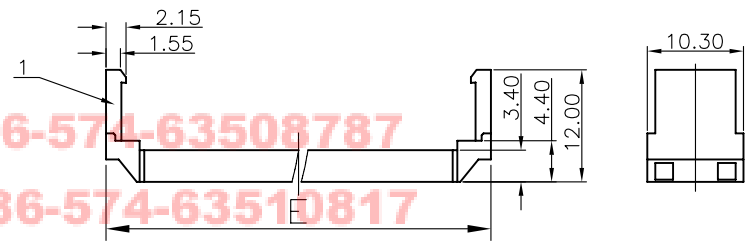

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE	D-SUB IDC WITH SHIELDING & COVER TYPE	
X.	±0.60	X.	±5°	mm	SHEET SIZE	A4	
.X	±0.38	.X	±3°		SERIES	DS1036-03 SERIES	
.XX	±0.25	.XX	±2°				
DRAWING TYPE		CUSTOMRE		晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO., LTD			
SCALE		1:1					
DRAWING NO.		C-DS1036-03-XXXXXX					

CONNFLY CONNFLY ELECTRONIC CO., LTD