

Appearance & Shape: To be free from any defect such as flow, burrs, unevenness etc, As per IEC standards.

Effective Parameters irrespective of material grade (per piece)

- Effective Length (L_e): 128.7 mm
- Effective Area (A_e): 150.1mm²
- Effective Area (A_{Min}): 150.1mm²
- Effective Volume (V_e): 19330mm³

Approximate weight : 95g/pc




T5019 OL (Un- Coated)

Test Conditions: 10kHz/150mV/CFR COIL,N=01/Lo=Zero/25°C

Material Grade	Initial Permeability (μ_{iac})	AL Value (nH)	Ordering code
CF196	2000 ±20%	2900+30%/-20%	CF196T5019
CF139	2100 ±20%	3100+30%/-20%	CF139T5019
CF130	3000 ±20%	4400+30%/-20%	CF130T5019
CF195A	5000 ±20%	7300+30%/-20%	CF195AT5019
CF265	5000 ±20%	7300+30%/-20%	CF265T5019
CF190	6000 ±20%	8800+30%/-20%	CF190T5019
CF197	7000 ±20%	10200+30%/-20%	CF197T5019
CF199	9000 ±20%	12500 ±30%	CF199T5019

Dimensions(Un-coated Core)

Dimension	Nominal (in mm)	Maximum (in mm)	Minimum (in mm)
A	50.0	51.0	49.0
B	34.0	34.8	33.2
C	19.0	19.5	18.5

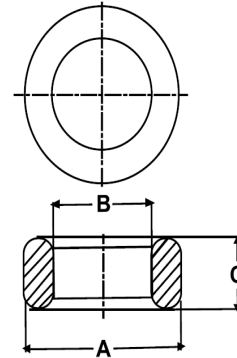

For general terms and conditions please visit: http://www.cosmoferrites.com/Downloads/Downloads/bcb70e7c-ae33-40ec-a881-0d5120db57b6_GTC.pdf