


MB1295 Series

Specifications:


Parameters	Units	MB1295A01NP	MB1295A05NP	MB1295A12NP
▶ Min Sound Pressure Level at 10cm	dBA	75	85	88
Rated Voltage	Vdc	1.5	5	12
Operating Voltage	Vdc	1.3 - 2	4 - 7	8 - 15
Resonance Frequency	Hz	2300 ± 300	2300 ± 300	2300 ± 300
▶ Max Operating Current	mA	30	30	30
Tone	-	Continuous	Continuous	Continuous
Operating Temperature	°C	-10 - +50	-40 - +85	-40 - +85
Case Material	-	Noryl	Noryl	Noryl
Weight	g	2.0	2.0	2.0



* Washable

Unit: mm • Tolerance: ±0.5mm

▶ Value applying rated voltage

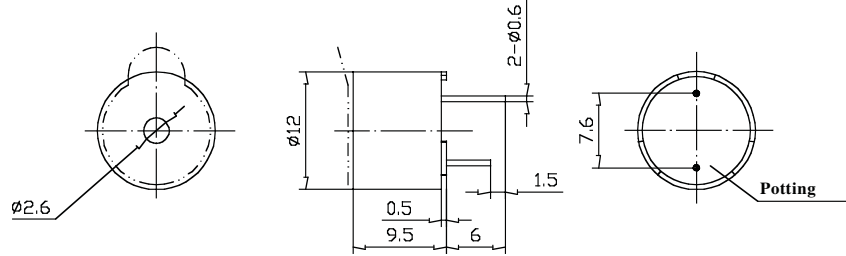

MB1614 Series

Specifications:

Parameters	Units	MB1614A01NP	MB1614A06NP	MB1614A12NP
▶ Min Sound Pressure Level at 10cm	dBA	75	85	85
Rated Voltage	Vdc	1.5	6	12
Operating Voltage	Vdc	1 - 2	4 - 8	8 - 15
Resonance Frequency	Hz	2300 ± 300	2300 ± 300	2300 ± 300
▶ Max Operating Current	mA	20	30	30
Tone	-	Continuous	Continuous	Continuous
Operating Temperature	°C	-40 - +85	-40 - +85	-40 - +85
Case Material	-	Noryl	Noryl	Noryl
Weight	g	5.0	5.0	5.0



* Washable

Unit: mm • Tolerance: ±0.5mm

▶ Value applying rated voltage

