




Leading - edge Technology

- ▶ Maximum efficiency of 97.5% and wide input voltage range
- ▶ Internal DC switch
- ▶ Transformerless GT topology
- ▶ Compact design
- ▶ Multi MPP controller
- ▶ MTL - String
- ▶ Bluetooth / RF technology / Wi-Fi
- ▶ Sound control
- ▶ Easy installation

3k efficiency

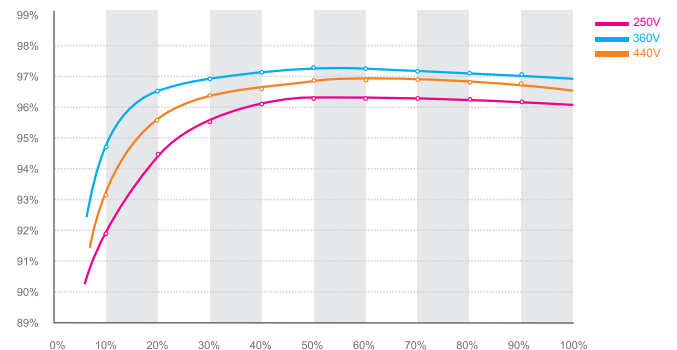

GROWATT NEW ENERGY TECHNOLOGY Co.,LTD

A: Building B, Jiayu Industrial Zone, #28 Guanghui Road, Longteng Community, Shiyan, Baoan District, Shenzhen, P.R.China.

T: + 86 150 1927 1958 F: + 86 755 2749 1460 E: info@growatt.org

	Growatt 2500 MTL	Growatt 3000 MTL
Input Data		
Max. DC power	2700W	3200W
Max. DC voltage	500V	500V
Start voltage	150V	150V
PV voltage range	100V - 500V	100V - 500V
MPPT work voltage range / nominal voltage	120V-500V/360V	120V-500V/360V
Full load dc voltage range	190V - 500V	190V - 500V
Number of independent MPP inputs / strings per MPP input	2 / 1	2 / 1
Max. input current of tracker A/tracker B	10A / 10A	10A / 10A
Max. input current per string of tracker A/tracker B	10A / 10A	10A / 10A
Output (AC)		
Rated AC output power	2500W	3000W
Max. AC power	2500W	3000W
Max. output current	12.5A	15A
AC nominal voltage; range	220V/230V/240V; 180V - 280V	220V/230V/240V; 180V - 280V
AC grid frequency; range	50,60Hz;±5 Hz	50,60Hz;±5 Hz
Power factor	1	1
THDI	<3%	<3%
AC connection	Single phase	Single phase
Efficiency		
Max. efficiency	97.5%	97.5%
Euro-eta	97%	97.4%
MPPT efficiency	99.5%	99.5%
Protection Devices		
DC reverse polarity protection	yes	yes
DC switch rating for each MPPT	yes	yes
Output over current protection	yes	yes
Output overvoltage protection-varistor	yes	yes
Ground fault monitoring	yes	yes
Grid monitoring	yes	yes
Integrated all-pole sensitive leakage current monitoring unit	yes	yes
General Data		
Dimensions (W / H / D) in mm	360/421/152	360/421/152
Weight	15.6KG	15.6KG
Operating temperature range	-30 °C ... +60 °C	-30 °C ... +60 °C
Noise emission (typical)	≤25 dB(A)	≤ 25 dB(A)
Self-Consumption night	< 0.5 W	< 0.5 W
Topology	Transformerless	Transformerless
Cooling concept	Natural	Natural
Environmental Protection Rating	IP 65	IP 65
Altitude	2000m without derating	2000m without derating
Relative Humidity	0~95%	0~95%
Features		
DC connection	H4/MC4(opt)	H4/MC4(opt)
AC connection	Screw terminal	Screw terminal
Display	LCD	LCD
Interfaces: RS232/RS485/ Bluetooth/RF/Wi-Fi	yes / yes / opt / opt / opt	yes / yes / opt / opt / opt
Warranty: 5 years / 10 years	yes / opt	yes / opt
Certificates and Approvals		
CE, VDE 0126-1-1, VDE-AR-N4105, G83, IEC-62109, CEI 0-21, As4777, AS/NZS 3100		