

ULL120650-1 (12V65Ah)

Specification

| | |
|------------------------------------|---|
| Cells Per Unit | 6 |
| Voltage Per Unit | 12 |
| Nominal Capacity | 65Ah@10hour-rate to 1.80V per cell @25°C |
| Weight | Approx. 19.5 Kg (Tolerance ±3.0%) |
| Internal Resistance | Approx. 7.0 mΩ |
| Terminal | F5(M8)/F11(M6) |
| Max. Discharge Current | 650A (5 sec) |
| Short Circuit Current | 1500A |
| Design Life | 12 years (Float charging) |
| Max. Charging Current | 19.5 A |
| Reference Capacity | C3 50.4AH C5 56.5AH C10 65.0AH C20 68.8AH |
| Standby Use Voltage | 13.6 V~13.8 V @ 25°C Temperature Compensation: -3mV/°C/Cell |
| Cycle Use Voltage | 14.6 V~14.8 V @ 25°C Temperature Compensation: -4mV/°C/Cell |
| Operating Temperature Range | Discharge: -20°C~60°C Charge: 0°C~50°C Storage: -20°C~60°C |
| Normal Operating Temperature Range | 25°C ±5°C |
| Self Discharge | USB Valve Regulated Lead Acid (VRLA) batteries can be stored for up to 6 months at 25°C and then recharging is recommended. Monthly Self-discharge ratio is less than 3% at 25°C. Please charge batteries before using. |
| Container Material | A.B.S. UL94-HB, UL94-V0 Optional. |



ULL series is a general purpose battery with 12 years design life in float service. It meets with IEC, JIS, BS, GB/T and YD/T standards. With advanced AGM valve regulated technology and high purity raw material, the ULL series battery maintains high consistency for better performance and reliable standby service life. It is suitable for UPS/EPS, Telecom, power grid, medical equipment, emergency light and security system applications.



ISO 9001




ISO 14001



OHSAS 18001



Dimensions

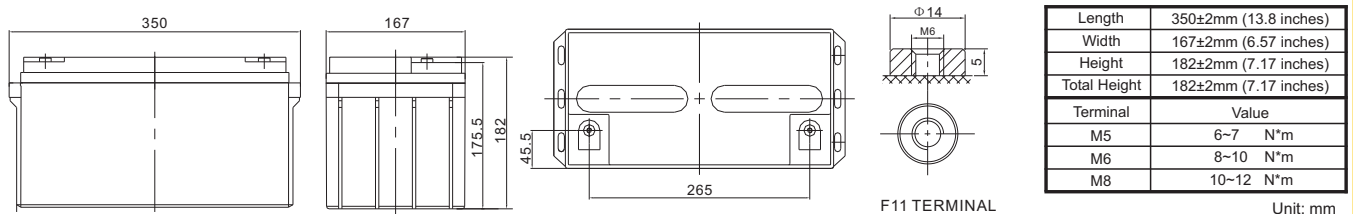

Constant Current Discharge Characteristics : A (25°C)


| F.V/Time | 5MIN | 10MIN | 15MIN | 30MIN | 1HR | 2HR | 3HR | 4HR | 5HR | 8HR | 10HR | 20HR |
|----------|-------|-------|-------|-------|------|------|------|------|------|------|------|------|
| 1.60V | 208.2 | 158.6 | 120.5 | 71.2 | 39.7 | 23.7 | 18.3 | 14.4 | 12.3 | 8.24 | 6.86 | 3.59 |
| 1.65V | 200.7 | 149.9 | 115.2 | 68.3 | 38.4 | 22.9 | 17.8 | 14.0 | 11.9 | 8.15 | 6.77 | 3.53 |
| 1.70V | 190.9 | 138.0 | 107.9 | 65.3 | 37.1 | 22.2 | 17.3 | 13.6 | 11.6 | 8.02 | 6.67 | 3.49 |
| 1.75V | 178.3 | 126.3 | 100.4 | 62.4 | 35.7 | 21.4 | 16.8 | 13.3 | 11.3 | 7.91 | 6.58 | 3.44 |
| 1.80V | 162.5 | 114.4 | 92.7 | 59.7 | 34.4 | 20.6 | 16.3 | 12.9 | 11.0 | 7.78 | 6.50 | 3.41 |
| 1.85V | 143.0 | 93.5 | 76.9 | 51.4 | 30.8 | 18.9 | 15.0 | 12.0 | 10.3 | 7.30 | 6.12 | 3.24 |

Constant Power Discharge Characteristics : WPC (25°C)


| F.V/Time | 5MIN | 10MIN | 15MIN | 30MIN | 1HR | 2HR | 3HR | 4HR | 5HR | 8HR | 10HR | 20HR |
|----------|-------|-------|-------|-------|------|------|------|------|------|------|------|------|
| 1.60V | 358.4 | 269.7 | 210.7 | 129.3 | 74.6 | 44.8 | 35.0 | 27.7 | 23.6 | 16.1 | 13.5 | 7.06 |
| 1.65V | 354.6 | 259.7 | 204.4 | 125.4 | 72.5 | 43.6 | 34.1 | 27.0 | 23.1 | 15.9 | 13.3 | 6.96 |
| 1.70V | 341.1 | 243.5 | 194.3 | 121.1 | 70.6 | 42.4 | 33.3 | 26.4 | 22.6 | 15.7 | 13.2 | 6.89 |
| 1.75V | 324.4 | 226.9 | 183.4 | 116.9 | 68.4 | 41.1 | 32.4 | 25.8 | 22.1 | 15.5 | 13.0 | 6.81 |
| 1.80V | 300.7 | 209.0 | 171.8 | 112.9 | 66.2 | 39.9 | 31.6 | 25.2 | 21.6 | 15.3 | 12.8 | 6.75 |
| 1.85V | 269.3 | 173.8 | 144.6 | 98.2 | 59.7 | 36.7 | 29.3 | 23.5 | 20.2 | 14.4 | 12.1 | 6.42 |

(Note) The above characteristics data are average values obtained within three charge/discharge cycle not the minimum values. The battery must be fully charged before the capacity test. The C₁₀ should reach 95% after the first cycle and 100% after the third cycle.


ULL120650-1 (12V65Ah)




Discharge Characteristics Curve

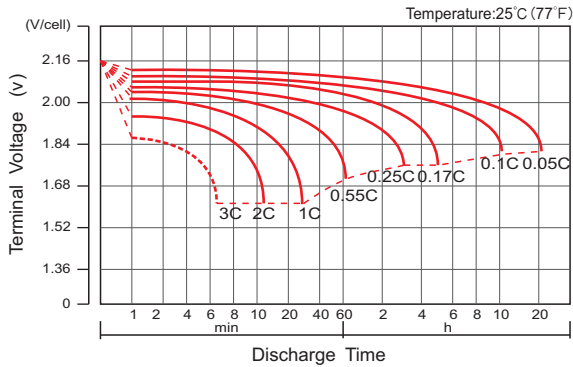


Charge Characteristic Curve For Standby Use

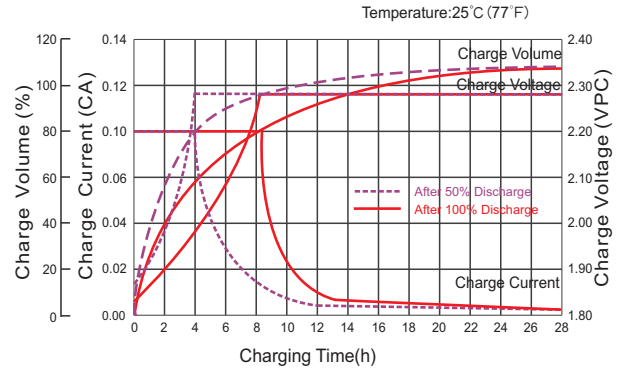


Cycle Life In Relation To Depth Of Discharge

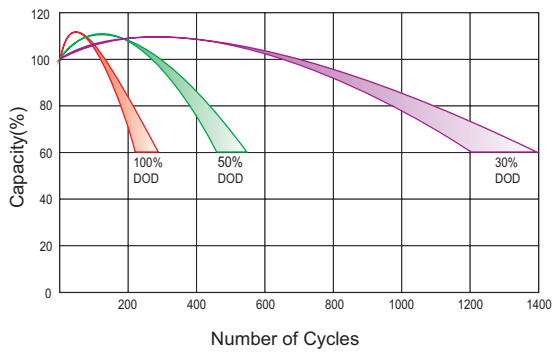


Relationship Between Charging Voltage And Temperature

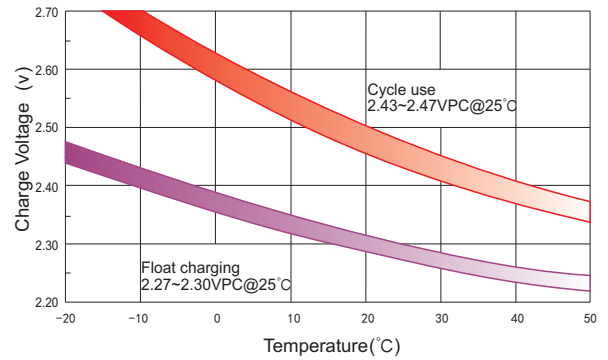


Temperature Effects On Capacity

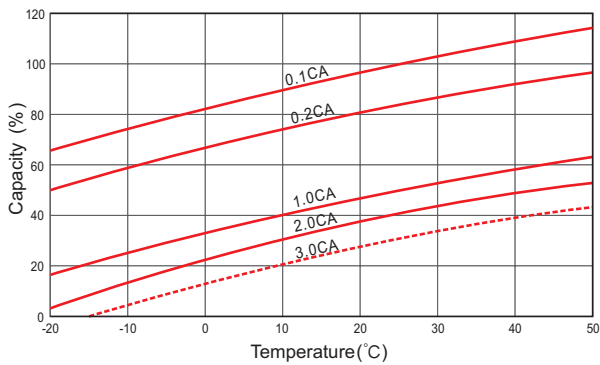


Storage Characteristics

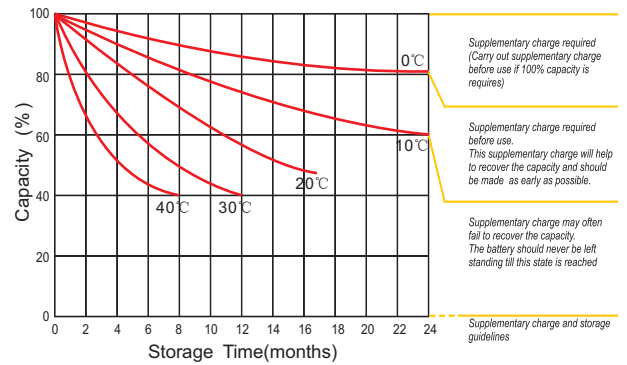

Effect Of Temperature On Long Term Life

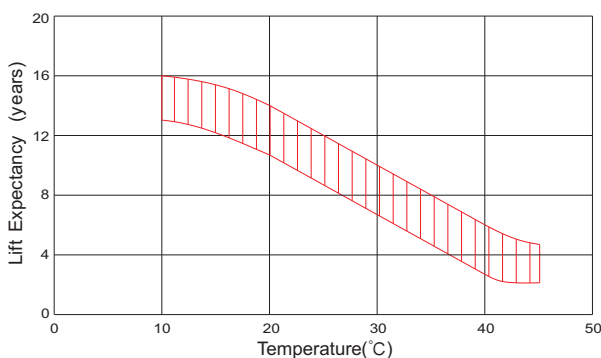

Life Characteristics Of Standby Use

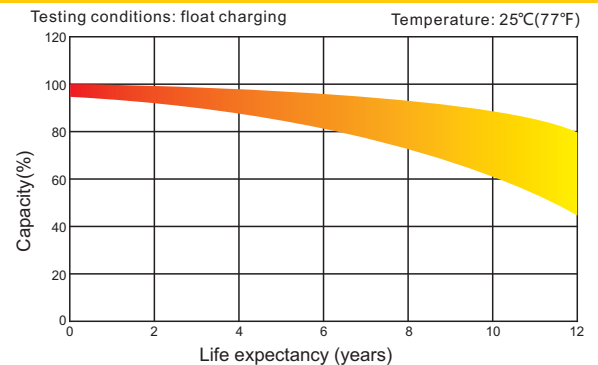

(Note) All above information shall be changed without prior notice, USB reserves the right to explain and update the latest information.