

M8 Male Assembly type,A-Coding

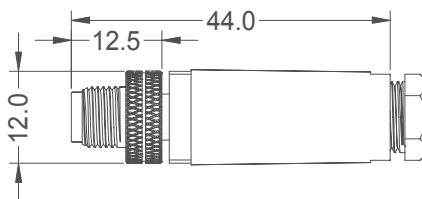
Connector Series: M8

Gender: Male

Coding: A

Assembly Style: Assembled (M8)

Part Number: M08AM0001

**General Information:**

Standard: IEC 61076-2-104-2008

Connector body: PA66+GF



Connector Contacts: Brass with gold plated

Coupling Nut: Brass with nickel plated

Operating temperature: $-40^{\circ}\text{C}\sim+90^{\circ}\text{C}$ or $-10^{\circ}\text{C}\sim+80^{\circ}\text{C}$ Insulation Resistance: $\geq 100\text{M}\Omega$

Waterproof Rating: IP67/IP68

Electrical Character:

Contacts	Rated voltage		Rated current	Contact Resistance	Cable format	Cable OD
	A/C	D/C				
 3 Pins	60V	60V	3A	$< 10\text{m}\Omega$	28AWG~22AWG	3.0~4.5
 4 Pins	30V	30V	3A	$< 10\text{m}\Omega$	28AWG~22AWG	3.0~4.5

Remarks:

Tel:+86-0755-86250720 +86-0755-88305694 13828823081

Fax:+86-0755-29886179

E-mail:saudi@sz-signal.com

sales@sz-signal.com

Web: <http://www.sz-signal.com/>

Location :Building 82,Industry Zone 4th,Mashantou Community,Gongming New Area,Shenzhen