

M8 Female Assembly type,A-Coding

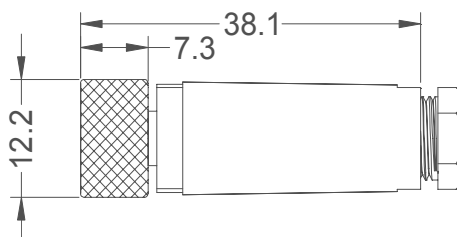
Connector Series: M8

Gender: Female

Coding: A

Assembly Style: Assembled (M8)

Part Number: M08AF0002

**General Information:**

Standard: IEC 61076-2-104-2008

Connector body: PA66+GF or PUR

Connector Contacts: Phosphorus copper with gold plated



Coupling Nut: Brass with nickel plated

Waterproof ring: Rubber ring

Operating temperature: $-40^{\circ}\text{C} \sim +90^{\circ}\text{C}$ or $-10^{\circ}\text{C} \sim +80^{\circ}\text{C}$ Insulation Resistance: $\geq 100\text{M}\Omega$

Waterproof Rating: IP67/IP68

Electrical Character:

Contacts	Rated voltage		Rated current	Contact Resistance	Cable format	Cable OD
	A/C	D/C				
 3 Pins	60V	60V	3A	$< 10\text{m}\Omega$	28AWG~22AWG	3.0~4.5
 4 Pins	30V	30V	3A	$< 10\text{m}\Omega$	28AWG~22AWG	3.0~4.5

Remarks:

Tel: +86-0755-86250720 +86-0755-88305694 13828823081

Fax: +86-0755-29886179

E-mail: saudi@sz-signal.comsales@sz-signal.comWeb: <http://www.sz-signal.com/>

Location : Building 82, Industry Zone 4th, Mashantou Community, Gongming New Area, Shenzhen