

M8 female panel connector front mount

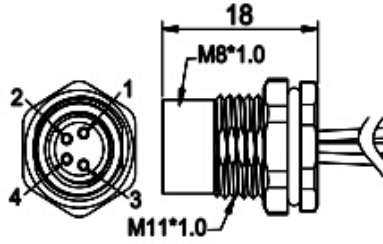
Connector Series: M8

Gender: Female

Coding: A

Type: Pannel mount

Part Number: PMM08FAF04001



General Information:

Standard: IEC 61076-2-104-2008

Connector body: PA66+GF

Connector Contacts: Brass with gold plated




Coupling Nut: Brass with nickel plated

Operating temperature: -25°C ~+85°C

Insulation Resistance: ≥100MΩ

Waterproof Rating: IP67/IP68

Electrical Character:

Contacts	Rated voltage		Rated current	Contact Resistance	Cable format	Cable OD
	A/C	D/C				
 3 Pins	60V	60V	3A	≤10mΩ	24AWG~22AWG	3.0~4.5
 4 Pins	30V	30V	3A	≤10mΩ	24AWG~22AWG	3.0~4.5
 5 Pins	30V	30V	3A	≤10mΩ	24AWG~22AWG	3.0~4.5

Remarks:

Tel: +86-0755-86250720 +86-0755-88305694 13828823081

Fax: +86-0755-29886179 E-mail: saudi@sz-signal.com sales@sz-signal.com

Web: <http://www.sz-signal.com/>

Location: Building 82, Industry Zone 4th, Mashantou Community, Gongming New Area, Shenzhen