


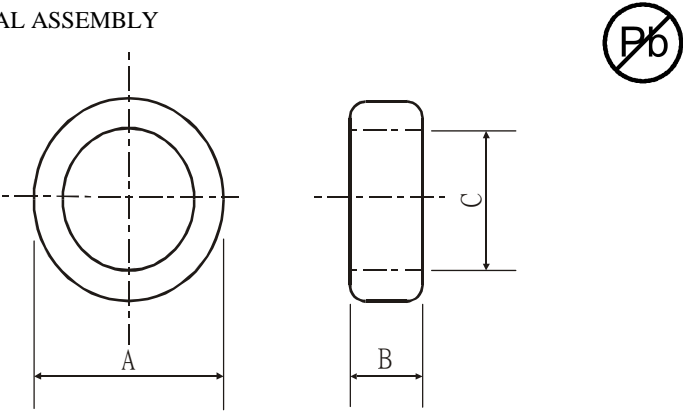

SPECIFICATION FOR APPROVAL

CUSTOMER:			CUSTOMER'S PART NAME		
DESCRIPTION: J2IR316071180 (T124-26)			DATE: 2015/6/3		
(1).MECHANICAL ASSEMBLY 			A	31.6 ± 0.5 m/m	
			B	7.11 ± 0.6 m/m	
			C	18.0 ± 0.5 m/m	
1ST COLOR		2ND COLOR		3RD COLOR	
(2)ELECTRICAL REQUIREMENTS					
AL	58.0 ± 10% nH/N ²	TEST FREQUENCY	10KHZ/0.2V		
L	23.2 ± 10% uH	TEST FREQUENCY	10KHZ/0.2V		
Q	15 (MIN)	TEST FREQUENCY	50KHZ/0.2V		
Z		TEST FREQUENCY			
IDC		TEST FREQUENCY			
(4)TEST INSTRUMENTS					
<input type="checkbox"/> HP 4287A <input type="checkbox"/> HP 4260A UNIVERSAL BRIDGE <input type="checkbox"/> HP 4261A DIGITAL LCR METER <input type="checkbox"/> DELICA HAM 310 GRID-DIP METER <input type="checkbox"/> DMC-230 DIGITAL DIP METER <input type="checkbox"/> DMC-470 DIGITAL DIP METER <input type="checkbox"/> DIGITAL MULTIMETER SC-7401			<input type="checkbox"/> HP 4815A RF VECTOR IMPEDANCE METER <input type="checkbox"/> CHEN HWA 101 <input checked="" type="checkbox"/> WK 3260A <input type="checkbox"/> IMPEDANCE ANALYZER <input type="checkbox"/> HP16092A <input type="checkbox"/> HP 4287A		
REVISION	DRAWN BY CHECKED BY	MAT'L	SPEC.		APPROVED BY
		CORE			
		TEST WIRE	0.3 Ø 2UEW		CHECKED BY
		TEST WINDING	20TS		DRAWN BY 

EROCORE ENTERPRISE CO., LTD.

TEST DATA

CUSTOMER			DATE	2015/6/3		
DESCRIPTION	J2IR316071180 (T124-26)		QUANTITY			
TEST ITEM	L (uH)	Q (MIN)				
SPEC YOUR						
SPEC SUGGEST	23.2 ± 10%	15				
TEST FREQ.	10KHZ/0.2V	50KHZ/0.2V				
1	23.40	18.0				
2	23.10	19.0				
3	23.09	18.0				
4	23.45	17.0				
5	23.27	18.0				
6	23.56	18.0				
7	23.12	18.0				
8	23.24	17.0				
9	23.10	19.0				
10	23.62	18.0				
X	23.3	18.0				
R	0.53	2.0				
YOUR SAMPLE						
TEST CONDITION:		TEMP.	°C	R.H.	%	
APPROVED BY	CHECKED BY		DRAWN BY 			

EROCORE ENTERPRISE CO., LTD.