




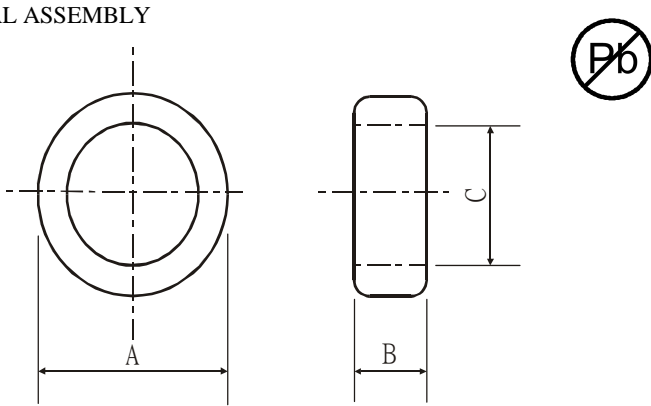


SPECIFICATION FOR APPROVAL

CUSTOMER:			CUSTOMER'S PART NAME			
DESCRIPTION: J2IR330111163			DATE: 2007/10/29			
(1).MECHANICAL ASSEMBLY 			A	33.0± 0.80 m/m		
			B	16.3± 0.80 m/m		
			C	11.1±0.90 m/m		
			D	m/m		
			E	m/m		
			F	m/m		
			G	m/m		
			H	m/m		
			I	m/m		
			1ST COLOR		2ND COLOR	
(2)ELECTRICAL REQUIREMENTS				(3) SCHEMATIC		
AL	116.0± 20% nH/N ²	TEST FREQUENCY	10KHZ/0.2V			
RDC		TEST FREQUENCY				
Q		TEST FREQUENCY				
Z		TEST FREQUENCY				
IDC		TEST FREQUENCY				
(4)TEST INSTRUMENTS						
<input type="checkbox"/> HP 4192A LF IMPEDANCE ANALYZER <input type="checkbox"/> HP 4260A UNIVERSAL BRIDGE <input type="checkbox"/> TF 6870 A <input type="checkbox"/> DELICA HAM 310 GRID-DIP METER <input type="checkbox"/> DMC-230 DIGITAL DIP METER <input type="checkbox"/> DMC-470 DIGITAL DIP METER <input type="checkbox"/> DIGITAL MULTIMETER SC-7401			<input type="checkbox"/> HP 4815A RF VECTOR IMPEDANCE METER <input checked="" type="checkbox"/> WK3260A <input type="checkbox"/> HP 5382A FREQUENCY COUNTER <input type="checkbox"/> HP-16092A BINDING POST FIXTURE <input type="checkbox"/> TEXSCAN 9900B SWEEP SYSTEM ANALYZER <input type="checkbox"/> HP 4193 A RF IMPEDANCE ANALYZER <input type="checkbox"/> HP 4338 A MILLIOHMMETER			
REVISION	DRAWN BY CHECKED BY	MAT'L	SPEC.		APPROVED BY 	
		CORE			CHECKED BY 	
		TEST WIRE	1.0 φ		DRAWN BY 	
		TEST WINDING	10Ts			

EROCORE ENTERPRISE CO., LTD.

TEST DATA

CUSTOMER		DATE	2007/ 10 /29			
DESCRIPTION	J2IR330111163	QUANTITY				
TEST ITEM	AL (nH/N ²)					
SPEC YOUR						
SPEC SUCCEST	116±20%					
TEST FREQ.	10KHZ/0.2V					
1	94.5					
2	125.0					
3	131.0					
4	107.8					
5	113.5					
6						
7						
8						
9						
10						
X	114.36					
R	36.5					
YOUR SAMPLE						
TEST CONDITION:		TEMP. °C	R.H. %			
APPROVED BY		CHECKED BY		DRAWN BY	