



REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LL 07/22/06'		LJC 07/22/06'
B	CHANGE HOUSING	JLZ 08/25/14'		

# NOTES:

## 1. SPECIFICATIONS


- . Housing material: NYLON 66
- . Wire range: AWG#30~#22
- . Rated voltage: 250V
- . Rated current: 1A
- . Contact resistance:  $\leq 0.03\Omega$
- . Insulation resistance:  $\geq 1000M\Omega$
- . Withstanding voltage: 500V,AC 1 minute
- . Temperature range:  $-25 \sim +85^{\circ}C$
- . Recommend PC board thickness:1.6mm

## 2. PRODUCT NUMBER CODE:



DS1069-03 - X X X X X

- Contact Plating  
6: Tin  
8: Full gold flash
- Housing Color  
W: White  
T: Transparent
- Mounting type  
C: Crimp  
V: V/T  
R: R/A
- Connector type  
M: Male  
F: Female
- No.of contact  
2 to 20



Female Terminal




Female Housing

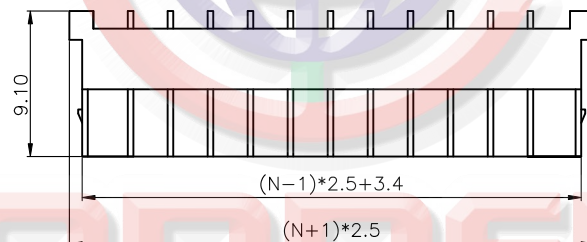



Male V/T type

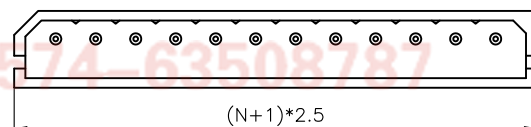


Male R/A type




Male V/T type

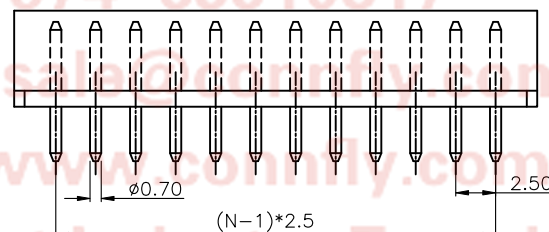

FOR 2P ONLY



GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	$\pm 0.60$	X.	$\pm 5^{\circ}$
.X	$\pm 0.38$	.X	$\pm 3^{\circ}$
.XX	$\pm 0.25$	.XX	$\pm 2^{\circ}$
DRAWING TYPE		CUSTOMER	
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1069-03-XXXXX-B		

PROJECTION		TITLE
UNITS	mm	P.C.B CONNECTOR 2.5mm 5264 TYPE
SHEET SIZE	A4	SERIES DS1069-03 SERIES



晨翔电子有限公司  
CONNFLY CONNFLY ELECTRONIC CO. LTD