
SPECIFICATIONS SHEET FOR APPROVAL

MAGNETIC BUZZER
P/N: MB1265A05NP

**DESCRIPTION: D12mm, H6.5mm Magnetic Buzzer, 2,300Hz, 5V, 85dB
at 10cm**

VERSION: 04

DATE: 18-Feb-2014

REVISIONS

VERSION	DESCRIPTION	DATE
01	Released from engineering	12 Nov07
02	Modify the pin length to 6.5mm from 7mm	10 Jan11
03	Added Silk screen marking	13 Feb14
04	Updated dimension drawing (pin length change from 6.5/5mm to 5.5/4mm)	15 Feb 14

APPROVED BY :

CUSTOMER NAME :

DATE :

SPECIFICATIONS SHEET

MAGNETIC BUZZER


P/N: MB1265A05NP

1. SPECIFICATIONS

PARAMETERS	VALUES	UNITS
*MIN SOUND PRESSURE LEVEL AT 10 CM	85	dB
RATED VOLTAGE	5	Vdc
OPERATING VOLTAGE	4 - 7	Vdc
RESONANCE FREQUENCY	2,300 ± 300	Hz
*MAX OPERATING CURRENT	30	mA
OPERATING TEMPERATURE	-20 to +70	°C
STORAGE TEMPERATURE	-30 to +75	°C
HOUSING	NORYL	-
WEIGHT	2	g

*Value applying rated voltage

2. DIMENSIONS (unit in mm)

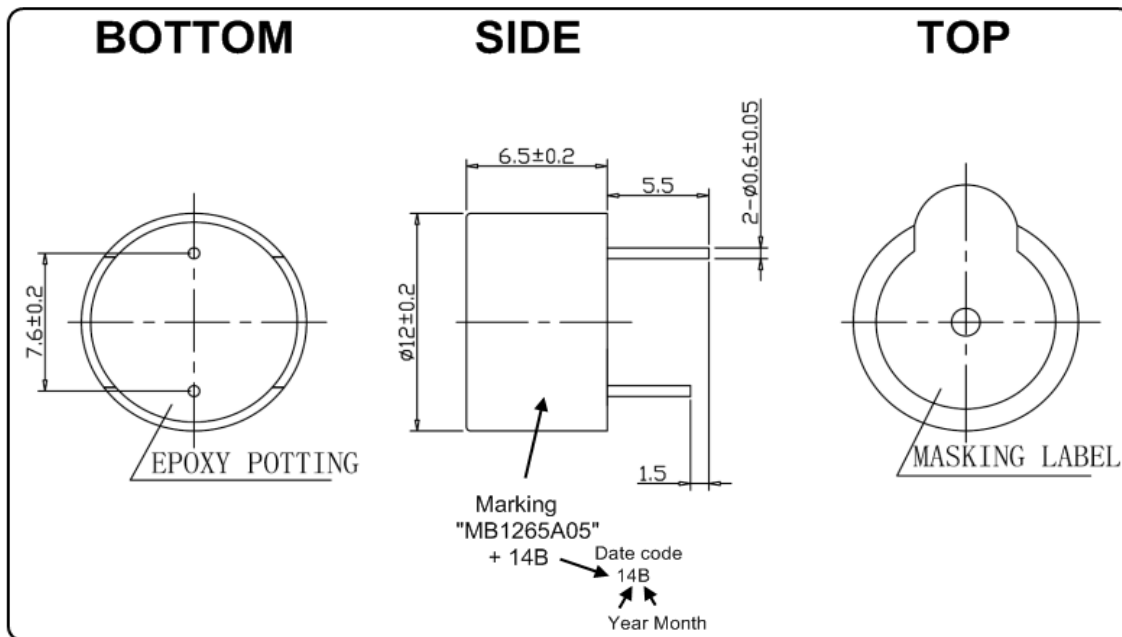

Tolerance: ± 0.5 mm except specified

VERSION: 04

DATE: 18-Feb-14

All specifications subject to change without notice