



ÖZELLİKLER:

- Lineer aydınlatma uygulamaları için ideal,
- Sabit akım ile çalışmaya uygun,
- 1545 lümeneye kadar ışık şiddeti,
- Yüksek renk geri verim endeksi; CRI>80,
- 3-Adım MacAdam Renk Gruplaması,
- Düşük parlaklık toleransı,
- 2700K - 6500K aralığında zengin renk tercihi seçenekleri,
- 50.000 saatin üzerinde ömür,
- 3 yıl garanti¹

FEATURES:

- Ideal for linear lighting applications,
- Suitable for constant current driving,
- Luminous flux up to 1545lm,
- High color rendering index; CRI>80,
- 3-Step MacAdam Color Binning,
- Small luminous flux tolerances,
- Various color temperature options between 2700K-6500K,
- More than 50.000hrs life-time,
- 3 years warranty¹




ÖRNEK UYGULAMA ALANLARI / TYPICAL APPLICATIONS:




TROFFER



BATTEN



LED TUBE



LED PANEL


Sipariş Kodları / Ordering Codes	Renk Sıcaklığı / Color Temp.	
SL1M-024298026-00-Q2N827	WW-2700K	
SL1M-024298026-00-Q2N830	WW-3000K	
SL1M-024298026-00-Q2N840	NW-4000K	
SL1M-024298026-00-Q2N850	CW-5000K	
SL1M-024298026-00-Q2N855	CW-5500K	
SL1M-024298026-00-Q2N865	CW-6500K	

TEKNİK VERİLER / TECHNICAL SPECIFICATIONS:


T_J = 25°C, RH30%

Ürün Kodu / Part Number	Renk Sıcaklığı / Color Temperature	Sürme Voltajı / Forward Voltage Vf			Sürme Akımı / Forward Current If(set)*		Işık Akısı / Luminous Flux @200mA, 25°C, RH30%			Işık Akısı / Luminous Flux @250mA,25°C, RH30%		Güç Tüketimi / Power Consumption		CRI		
		Min.	Typ.	Max.	Typ.	Max.	Min.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Min.	Typ.	Max.
SL1M-024298026-00-Q2N827	2700K	36,4 V	41,2 V	44,2 V	200 mA	250 mA	1071 lm	1139 lm	1206 lm	1302 lm	1466 lm	8,2 W	10,3 W	80	83	90
SL1M-024298026-00-Q2N830	3000K	36,4 V	41,2 V	44,2 V	200 mA	250 mA	1071 lm	1139 lm	1206 lm	1302 lm	1466 lm	8,2 W	10,3 W	80	83	90
SL1M-024298026-00-Q2N840	4000K	36,4 V	41,2 V	44,2 V	200 mA	250 mA	1170 lm	1221 lm	1271 lm	1422 lm	1545 lm	8,2 W	10,3 W	80	83	90
SL1M-024298026-00-Q2N850	5000K	36,4 V	41,2 V	44,2 V	200 mA	250 mA	1170 lm	1221 lm	1271 lm	1422 lm	1545 lm	8,2 W	10,3 W	80	83	90
SL1M-024298026-00-Q2N855	5500K	36,4 V	41,2 V	44,2 V	200 mA	250 mA	1170 lm	1221 lm	1271 lm	1422 lm	1545 lm	8,2 W	10,3 W	80	83	90
SL1M-024298026-00-Q2N865	6500K	36,4 V	41,2 V	44,2 V	200 mA	250 mA	1170 lm	1221 lm	1271 lm	1422 lm	1545 lm	8,2 W	10,3 W	80	83	90

DEVRE ŞEMASI / CIRCUIT DIAGRAM:

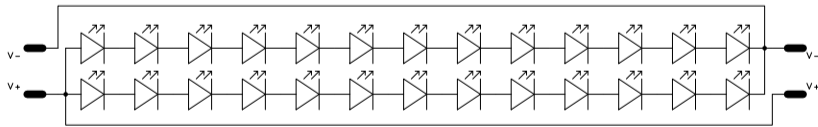

BOYUTLAR / DIMENSIONS:

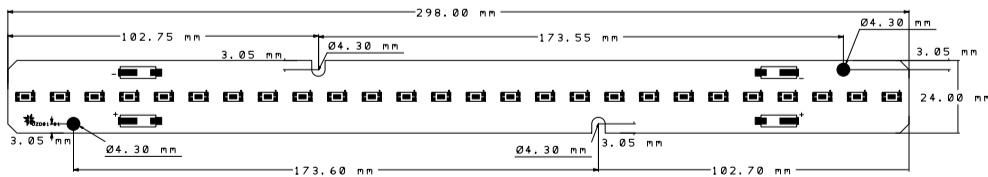

¹HEP ve HEC marka sürücülerimizle birlikte kit olarak alındığında garanti süresi 5 yıldır.

¹When purchased as kit solution with our HEC and HEP LED Drivers, 5 years warranty is applied.