
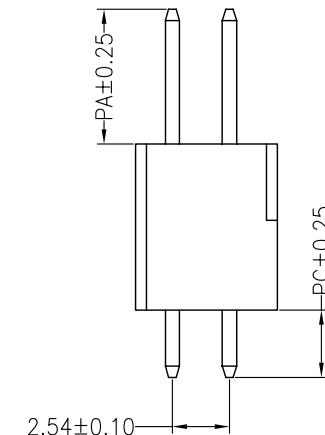
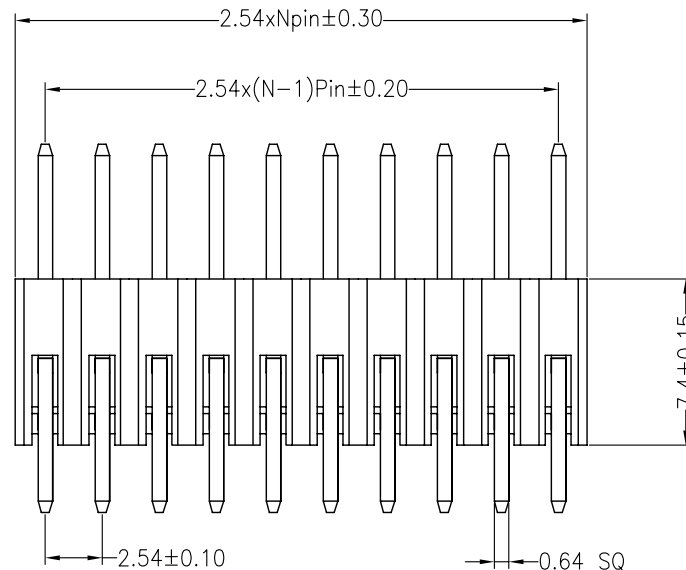
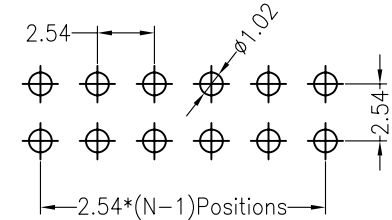


SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°c to +105°c

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 5 seconds)

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

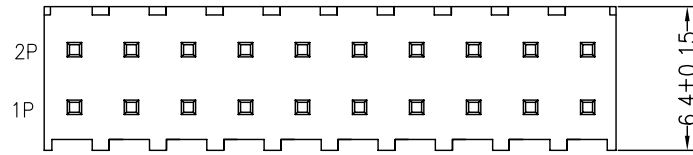

Dimension antitheses list		
ITEM	PA	PC
Standard	6.00	3.00
Alternate	7.00	3.60

OPERATION		DRAW	YiYuSheng	12.11.11	SCALE	FIT
X.X	±0.30				UNIT	mm
X.XX	±0.20	CHECK			SIZE	A4
X.XXX	±0.10				SHEET	1/1
Angle	±3°	APPROVE			PROJ.	☞
DIM	TOL					

PART NO.		L-KLS1-207-7.4-2-46-S-3.6*7.0*18.0	
		2.54PH 2xNpin H7.40mm 180°	

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012.11.11	NEW DRAWING	

KLS ELECTRONIC CO; LTD