



SPECIFICATIONS SHEET FOR APPROVAL

MAGNETIC BUZZER

P/N: MB1265A12NP

DESCRIPTION: D12mm, H6.5mm, 2,300Hz, 12V, 83dB at 10cm

VERSION: 02

DATE: 10-Jan-11

REVISIONS

VERSION	DESCRIPTION	DATE
01	Released from engineering	12 Nov07
02	Modify the pin length to 6.5mm from 7mm	10 Jan11

APPROVED BY :

CUSTOMER NAME :

DATE :

SPECIFICATIONS SHEET


MAGNETIC BUZZER
P/N: MB1265A12NP

1. SPECIFICATIONS

PARAMETERS	VALUES	UNITS
*MIN SOUND PRESSURE LEVEL AT 10 CM	83	dB
RATED VOLTAGE	12	Vdc
OPERATING VOLTAGE	9 - 15	Vdc
RESONANCE FREQUENCY	2,300 ± 300	Hz
*MAX OPERATING CURRENT	30	mA
OPERATING TEMPERATURE	-20 to +70	°C
STORAGE TEMPERATURE	-30 to +75	°C
HOUSING	NORYL	-
WEIGHT	2	g

*Value applying rated voltage

2. DIMENSIONS (unit in mm)

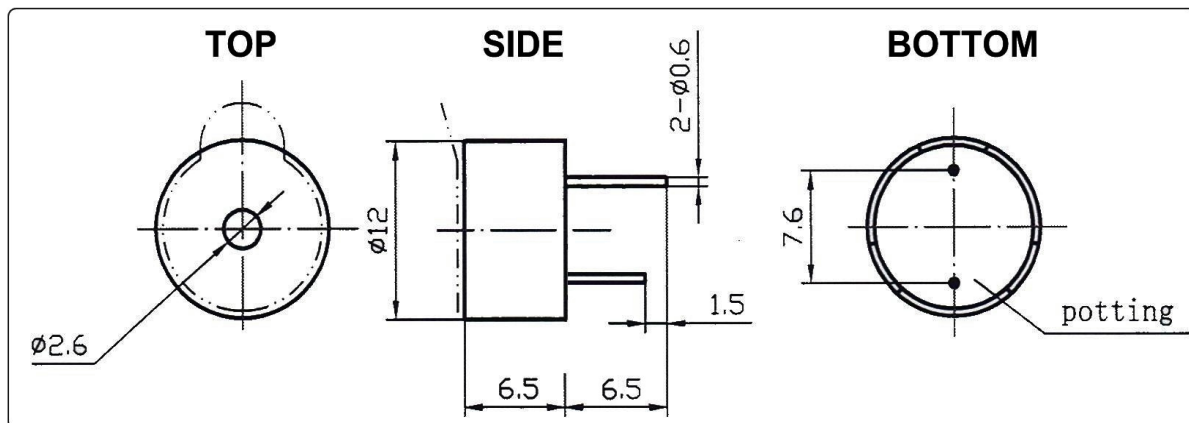

Tolerance: ± 0.5 mm except specified

VERSION: 02

DATE: 10-Jan-11

All specifications subject to change without notice