


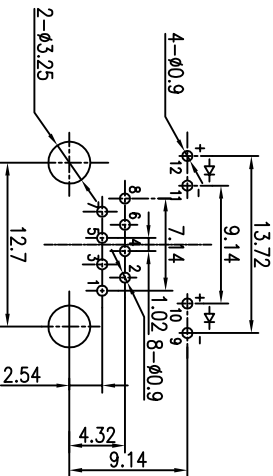


SPECIFIED TOLERANCES  
 .0 ±0.38 ANGLE 0° ±3°  
 .00 ±0.25 ANGLE 0.0° ±1°  
 .000 ±0.10

THIS IS A C.A.D. GENERATED DRAWING  
 DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER	ORIGINAL	①
DRAWING UPDATED	OCT 22/2015	②

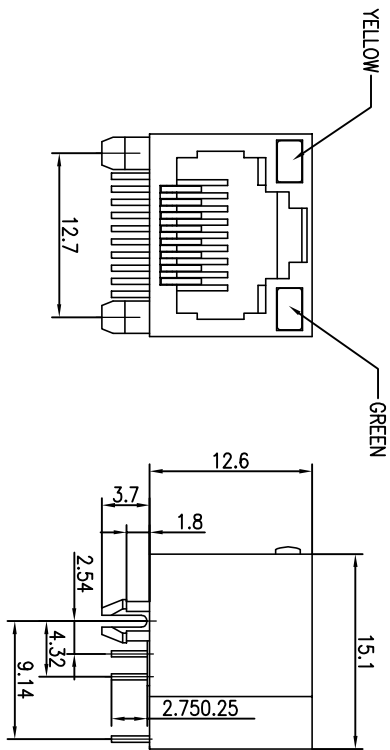

PC Board Layout

**NOTES**

- MATERIAL**
- 1.HOUSING MATERIAL : PBT UL94V-0, YELLOW COLOR.
  - 2.CONTACT MATERIAL : PHOSPHOR BRONZE Ø0.46mm.
  - 3.PLATING : GOLD PLATING OVER NICKEL.

**ELECTRICAL**

- 1.VOLTAGE RATING : 125 VAC RMS.
- 2.CURRENT RATING : 1.5 AMP.
- 3.CONTACT RESISTANCE : 30 MILLIOHMS MAX.
- 4.INSULATION RESISTANCE : 500 MEGOHMS MIN @ 500V DC .
- 5.DIELECTRIC WITH STANDING : 1000V AC RMS 50Hz. 1MIN.

**MECHANICAL**

- 1.DURRABILITY : 750 CYCLES MIN.
- 2.PCB RETENTION:PRE-SOLDER : 1 LB MIN.

**ENVIRONMENTAL:**

- 1.STORAGE : -40°C ~ +85°C.
- 2.OPERATION : -40°C ~ +85°C.

**GOLD PLATING**

<b>PART NO</b>	<b>GOLD PLATING THICKNESS</b>
A20-108-261-907	GOLD FLASH PLATING
A20-108-361-907	15 MICRO INCHES OF GOLD
A20-108-661-907	30 MICRO INCHES OF GOLD
A20-108-961-907	50 MICRO INCHES OF GOLD



THIS SERIES FULLY CONFORMS TO THE  
 EUROPEAN UNION DIRECTIVES  
 2011/65/EU FOR RoHS COMPLIANCY.

**RJ45 TAB UP, 8 POSITION**  
 WITH BOTH YELLOW LED

**EDAC INC**  
 TORONTO, ONTARIO  
 CANADA  
 YOUR CONNECTION TO QUALITY & SERVICE

THESE DRAWINGS AND SPECIFICATIONS  
 ARE THE PROPERTY OF EDAC INC, AND  
 SHALL NOT BE REPRODUCED OR COPIED  
 OR USED AS THE BASIS FOR THE  
 MANUFACTURE OR SALE OF APPARATUS  
 WITHOUT WRITTEN PERMISSION.

ACAD REFERENCE NO.	A20-108-261-907
DRAWN:	N.SONDH
DATE:	OCT. 15/15
PART NUMBER	SEE GOLD PLATING
DRAWING NUMBER	A20-108-261-907
ISSUE	2