
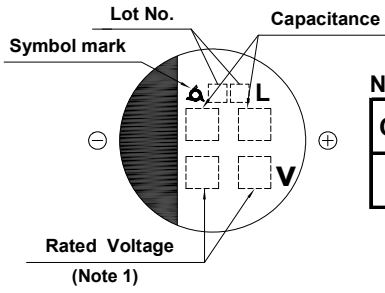


|   |                                    |
|---|------------------------------------|
| <b>ALUMINUM ELECTROLYTIC CAPACITORS</b> | <b>APPROVAL NO.</b><br><b>6780</b> |
|---|------------------------------------|

|                           |  |
|---------------------------|--|
| <b>BLA 6.3 VC 100 (M)</b> | <b>SERIES</b><br>BLA                         |
|                           | <b>RATING</b><br>6.3 V 100 $\mu$ F           |
|                           | <b>CASE SIZE</b><br>$\varnothing$ 6.3 x 5.2L |

**A. DIAGRAM OF DIMENSION**

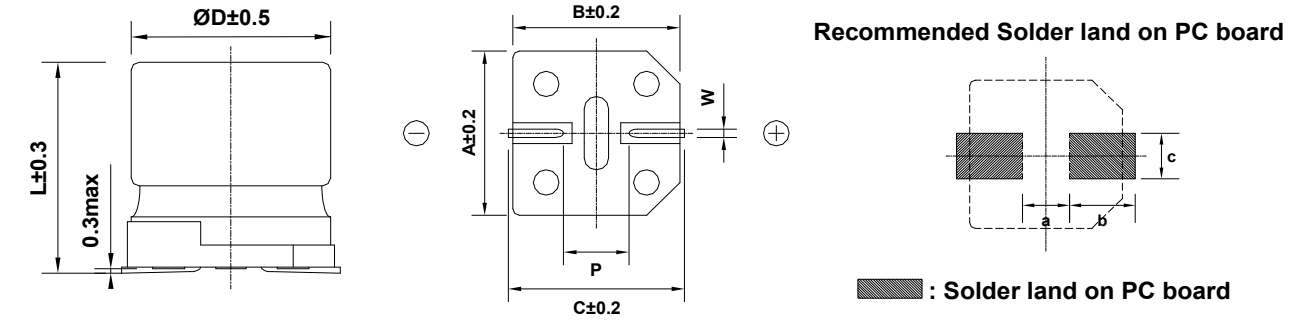

Note 1 : 6.3 WV is marked by 6V

| Case code | ØD  | L   | A   | B   | C   | W       | P   | a   | b   | c   |
|-----------|-----|-----|-----|-----|-----|---------|-----|-----|-----|-----|
| F55       | 6.3 | 5.2 | 6.6 | 6.6 | 7.2 | 0.5-0.8 | 1.9 | 1.9 | 3.5 | 1.6 |

**B. ELECTRICAL CHARACTERISTICS**

- A. OPERATING TEMPERATURE RANGE : -40 ~ +105 °C
- B. RATED VOLTAGE : 6.3 V<sub>DC</sub>
- C. SURGE VOLTAGE : 8 V<sub>DC</sub>
- D. CAPACITANCE TOLERANCE : ± 20% at 20 °C, 120Hz
- E. LEAKAGE CURRENT : Lower 6.3  $\mu$ A, after 2 minutes at 20 °C
- F. DISSIPATION FACTOR (TAN $\delta$ ) : Lower 0.28 at 20 °C, 120Hz
- G. MAX. RIPPLE CURRENT : 52 mArms at 105 °C, 120Hz
- H. TEMPERATURE CHARACTERISTIC :
  - \* Max. Impedance ratio Z(-25 °C) / Z(20 °C) = 4
  - Z(-40 °C) / Z(20 °C) = 10 (at 120Hz)
- I. LOAD LIFE : The following specifications shall be satisfied when the capacitors are restored to 20 °C after the rated voltage is applied for 5,000 hours at 105 °C.
  - # Capacitance change  $\leq$  ± 30% of the initial value
  - # Tan $\delta$   $\leq$  300 % of the initial specified value
  - # Leakage Current  $\leq$  The initial specified value
- J. SHELF LIFE : The following specifications shall be satisfied when the capacitors are restored to 20 °C after exposing them for 1,000 hours at 105 °C without voltage applied. The rated voltage shall be applied to the capacitors for a minimum of 30 minutes, at least 24 hours and not more than 48 hours before the measurement.
  - # Capacitance change  $\leq$  ± 30% of the initial value
  - # Tan $\delta$   $\leq$  300 % of the initial specified value
  - # Leakage Current  $\leq$  The initial specified value
- K. CLEANING CONDITIONS : Solvent-proof
- L. OTHERS : Satisfied characteristics KS C IEC 60384-4

