
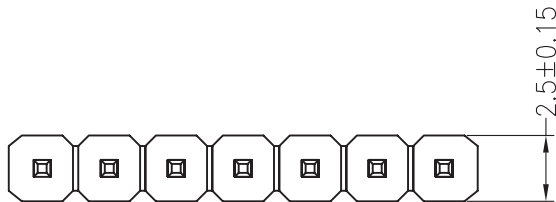


Pin Headers




KLS1-207A 2.54PH 1xNPin H2.5mm 90° SMT

Specifications:

- Rated Current:3.0AMP
- Contact Resistance:20mΩ Max
- Withstand Voltage:1000V AC/DC
- Insulation Resistance:1000MΩ Min
- Operation Temperature:-40°C to +105°C
- Contact Material:Brass
- Contact Plating:Au Over Ni
- Insulator Material:Polyester(UL94V-0)
- Standard:PA6T
- Max.Processing Temp:230°C for 30-60 seconds
(260°C for 10 seconds)

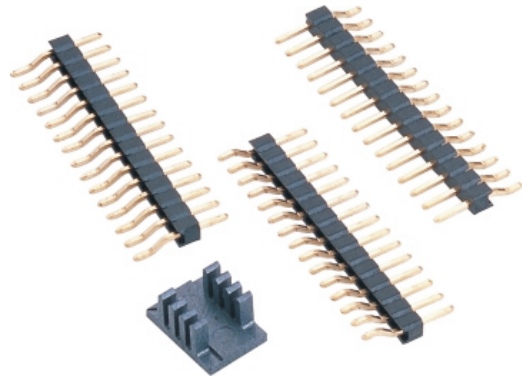

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ±0.05)

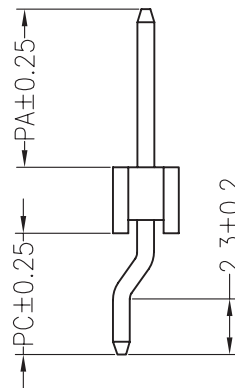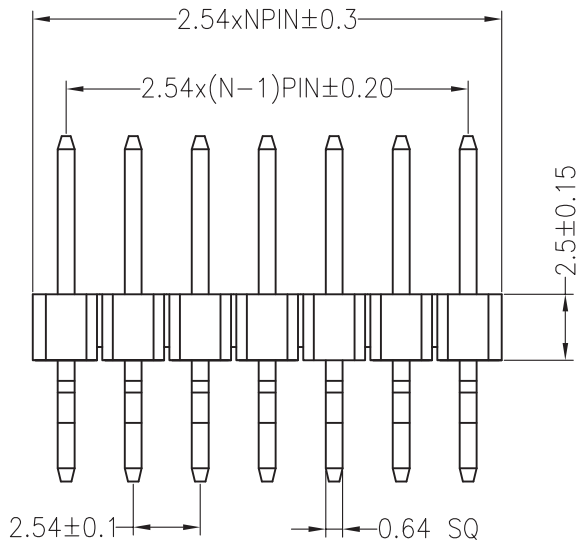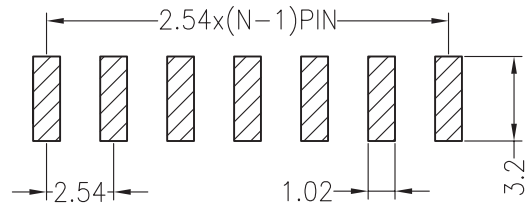

Dimension antitheses list		
ITEM	PC	PA
Standard	4.82	6.00
Alternate		

ORDER INFORMATION

Product NO.: L-KLS1-207A-1-02-T

