

GREAT POWER

Customer: _____

Li-ion Aluminium Battery Specification

Model: SAML760-900mAh (553443A)

Checked & Approved by	Prepared by	Date
Zhaoshixing	Li Wenqun	2015-03-06

History of revisions				
Edition	Description	Prepared by	Approved by	Date
A0	First Edition	Li Wenqun	Zhaoshixing	2015-03-06

GREAT POWER BATTERY (H.K.) COMPANY LIMITED

Note: 1. Kindly please sign on the underneath and send it back to us if the sample is approved.
2. Kindly please contact us as soon as possible if the sample isn't approved. Thanks!

Client Confirmation	
Date	

GREAT POWER

Contents

1.Scope -----	3
2.Porduct configuration -----	3
3.Product Dimension -----	3
4.Product Specification -----	6
5.Product Performance -----	7
6.PCM Specification -----	7
7.Security Testing Standard -----	8
8.Storage and Transportation -----	8
9.Use Attentions -----	9
10.Period of Warranty -----	10
11.Others -----	10
12.Note -----	10

GREAT POWER

1.Scope

This specification is applied to BLT005-900mAh battery Manufactured by GREAT POWER Company Limited.


2.Product Configuration

No.	Item	Criteria	Remark
1	Li-ion Aluminium Cell	SAML760 553443A-900mAh 3.7V	1PCS
2	PCM	G3J+8205+ NTC10K	
3	Wire & Connector	NO	
4	PVC Film	NO	

3.Product Dimension

3.1Product Dimension

Unit: mm

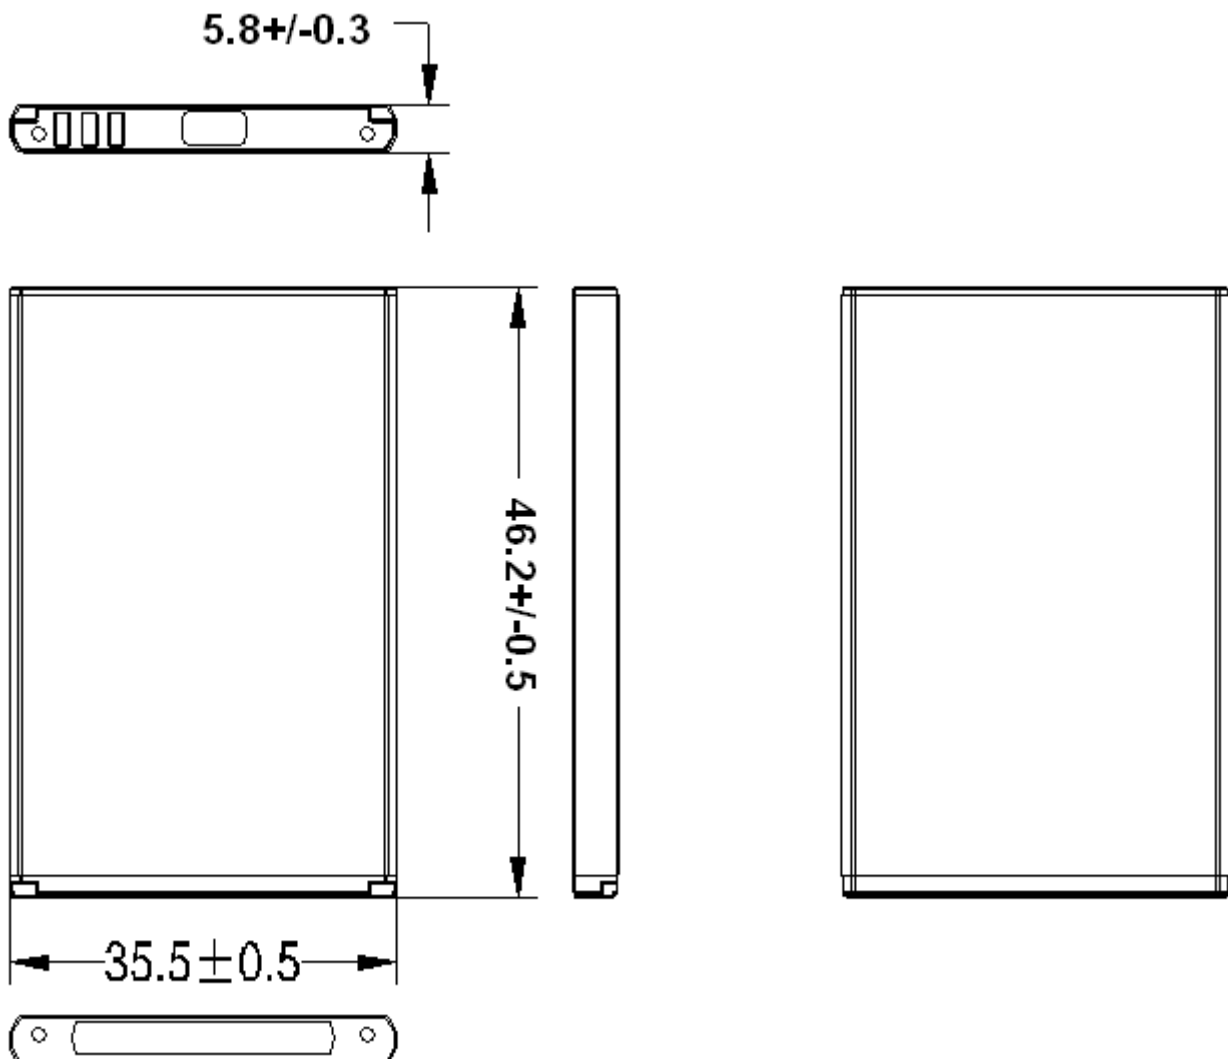

GREAT POWER

4.Product Specification

Table 1:

No.	Item	Rated Performance		Remark
1	Rated Capacity	Typical	900mAh	Discharge at 0.2C ₅ A after standard charge fully.
		Minimum	880mAh	
2	Nominal Voltage	3.7V		Mean operation voltage during standard discharge.
3	Voltage at end of Discharge	3.0V		Discharge cut-off voltage.
4	Charging Voltage	4.2±0.03V		
5	AC (1KHz) Impedance New Cell Max.(mΩ)	≤180mΩ		
6	Standard Charge	Constant Current 0.2C ₅ A Constant Voltage 4.2V 0.01 C ₅ A cut-off		Charge time : Approx 6.5h.
7	Standard Discharge	Constant current 0.2 C ₅ A end voltage 3.0V		
8	Fast Charge	Constant Current 0.5C ₅ A Constant Voltage 4.2V 0.01 C ₅ A cut-off		Charge time : Approx 4.0h.
9	Fast Discharge	Constant current 1 C ₅ A end voltage 3.0V		
10	Maximum Continuous Charge Current	0.5C ₅ A		
11	Maximum Continuous Discharge Current	1.0C ₅ A		
12	Operation Temperature Range	Charge: 0~45°C		60±25%RH. Bare Cell.
		Discharge: -20~60°C		
13	Storage Temperature Range	Less than 1 year: -20~25°C		
		Less than 3 months: -20~40°C		
14	Storage Humidity Range	60±25%RH.		
15	Product Dimension	Length:Max.46.2±0.5 mm		Initial dimension
		Width: Max35.5±0.5 mm		
		Thickness:5.8±0.3mm		

GREAT POWER

5. Product Performance

5.1 Standard Testing Conditions

Test should be conducted with new batteries within one week after shipment from our factory and the cells shall not be cycled more than five times before the test. Unless otherwise defined, test and measurement shall be done under temperature of $20\pm 5^{\circ}\text{C}$ and relative humidity of 45~85%. If it is judged that the test results are not affected by such conditions, the tests may be conducted at temperature $15\sim 30^{\circ}\text{C}$ and humidity 25~85%RH.

5.2 Measuring Instrument or Apparatus

5.2.1 Dimension Measuring Instrument

The dimension measurement shall be implemented by instruments with equal or more precision scale of 0.01mm.

5.2.2 Voltmeter

Standard class specified in the national standard or more sensitive class having inner impedance more than $10\text{k}\Omega/\text{V}$

5.2.3 Ammeter

Standard class specified in the national standard or more sensitive class. Total external resistance including ammeter and wire is less than 0.01Ω .

5.2.4 Impedance Meter

Impedance shall be measured by a sinusoidal alternating current method (1kHz LCR meter).

5.3 Standard Charge\Discharge

5.3.1 Standard Charge : Test procedure and its criteria are referred as follows:

$$0.5C_5A = 450\text{mA}$$

Charging shall consist of charging at a $0.5C_5A$ constant current rate until the cell reaches 4.2V. The cell shall then be charged at constant voltage of 4.2 volts while tapering the charge current. Charging shall be terminated when the charging current has tapered to $0.01C_5A$. Charge time : Approx 4.0h, The cell shall demonstrate no permanent degradation when charged between 0°C and 45°C .

5.3.2 Standard Discharge

$$0.2C_5A = 180\text{mA}$$

Cells shall be discharged at a constant current of $0.2 C_5A$ to 3.0volts @ $20^{\circ} \pm 5\text{C}$.

5.4 Appearance

There shall be no such defect as flaw, crack, rust, leakage, which may adversely affect commercial value of battery.

5.5 Initial Performance Test

Table 2:

Item	Measuring Procedure	Requirements
Open-Circuit Voltage	The open-circuit voltage shall be measured within 24 hours after standard charge.	$\geq 4.0\text{V}$
(2) AC Impedance Resistance	The Impedance shall be measured in an alternating current method (1kHz LCR meter) after standard charge at $20\pm 5^{\circ}\text{C}$.	$\leq 180\text{m}\Omega$
(3) Nominal Capacity	The capacity on $0.2C_5A$ discharge shall be measured after standard charge at $20\pm 5^{\circ}\text{C}$.	Discharge Capacity $\geq 880\text{mAh}$

GREAT POWER

5.6 Temperature Dependence of Capacity (Discharge)

Cells shall be charged per 5.3.1. and discharged @0.2C₅A to 3.0 volts, except to be discharged at temperatures per Table 3. Cells shall be stored for 3 hours at the test temperature prior to discharging and then shall be discharged at the test temperature. The capacity of a cell at each temperature shall be compared to the capacity achieved at 23 °C and the percentage shall be calculated. Each cell shall meet or exceed the requirements of Table 3.

Table 3:

Discharge Temperature	-20°C	0°C	23°C	60°C
Discharge Capacity (0.2 C ₅ A)	50%	80%	100%	95%

5.7 Cycle Life and Leakage-Proof

Table 4:

No.	Item	Criteria	Test Conditions
1	Cycle Life (0.5 C ₅ A)	Higher than 80% of the Initial Capacities of the Cells	Carry out 300 cycle charging/ Discharging in the below condition. ◆Charge: Standard Charge, per 5.3.1 ◆Discharge:0.5 C ₅ A to 3.0V ◆Rest Time between charge/discharge:30min. ◆Temperature:20±5°C
2	Leakage-Proof	No leakage (visual inspection)	After full charge, store at 60±3°C 60±10%RH for 1month.

6. PCM Specification

6.1 Using scope: The document applies to Li-ion Battery protection module for GREAT POWER.

6.2 Battery capacity: 900mAh

6.3 Environment request: RoHS.

6.4 Function description: Over charge protection, Over discharge protection, Over current protection
Short circuit protection

GREAT POWER

6.5 Electric features:

Item 项目	Symbol 符号	Content 详细内容	Criterion 标准
Over charge Protection 过充保护	V_{DET1}	Over charge detection voltage 保护电压	$4.28 \pm 0.025V$
	tV_{DET1}	Over charge detection delay time 保护延迟时间	$0.96 \sim 1.4S$
	V_{REL1}	Over charge release voltage 恢复电压	$4.08 \pm 0.025V$
Over discharge protection 过放保护	V_{DET2}	Over discharge detection voltage 过放电检测电压	$3.0 \pm 0.050V$
	tV_{DET2}	Over discharge detection delay time 保护延迟时间	$144 \pm 29 \text{ mS}$
	V_{REL2}	release voltage 恢复电压	$3.0 \pm 0.100V$
Over current protection 过流保护	V_{DET3}	Over current detection voltage 过电流检测电压	$0.08 \pm 0.015V$
	I_{DP}	Over current detection current 过电流保护电流	$1.5 \sim 3.5A$
	tV_{DET3}	Detection delay time 检测延迟时间	$4.5 \sim 18mS$
Short protection 短路保护		Detection condition 保护条件	Exterior short circuit 外部电路短路
	T_{SHORT}	Detection delay time 检测延迟时间	$220 \sim 380uS$
		Release condition 保护解除条件	Cut short circuit 断开短路电路
Interior resistance 内阻	R_{SS}	Main loop electrify resistance 主回路通态电阻	$R_{SS} \leq 60m\Omega$
Current consumption 消耗电流	I_{DD}	Current consume in normal operation 工作时电路内部消耗	$2.0 \mu A$ Type $6.0 \mu A$ Max

6.6 Reliability test

6.6.1 Humidity test: $+40 \pm 2^{\circ}C$, 90%RH, 48h.

6.6.2 High temp. test: $+55 \pm 2^{\circ}C$, 2h.

6.6.3 Low temp. test: $-20 \pm 2^{\circ}C$, 16h


6.6.4 ESD test: normal operation in all parts at $\pm 4KV$ (contact) $\pm 8KV$ (air) condition

6.7 Top overlay

TBD

GREAT POWER

6.8 Circuit diagram:

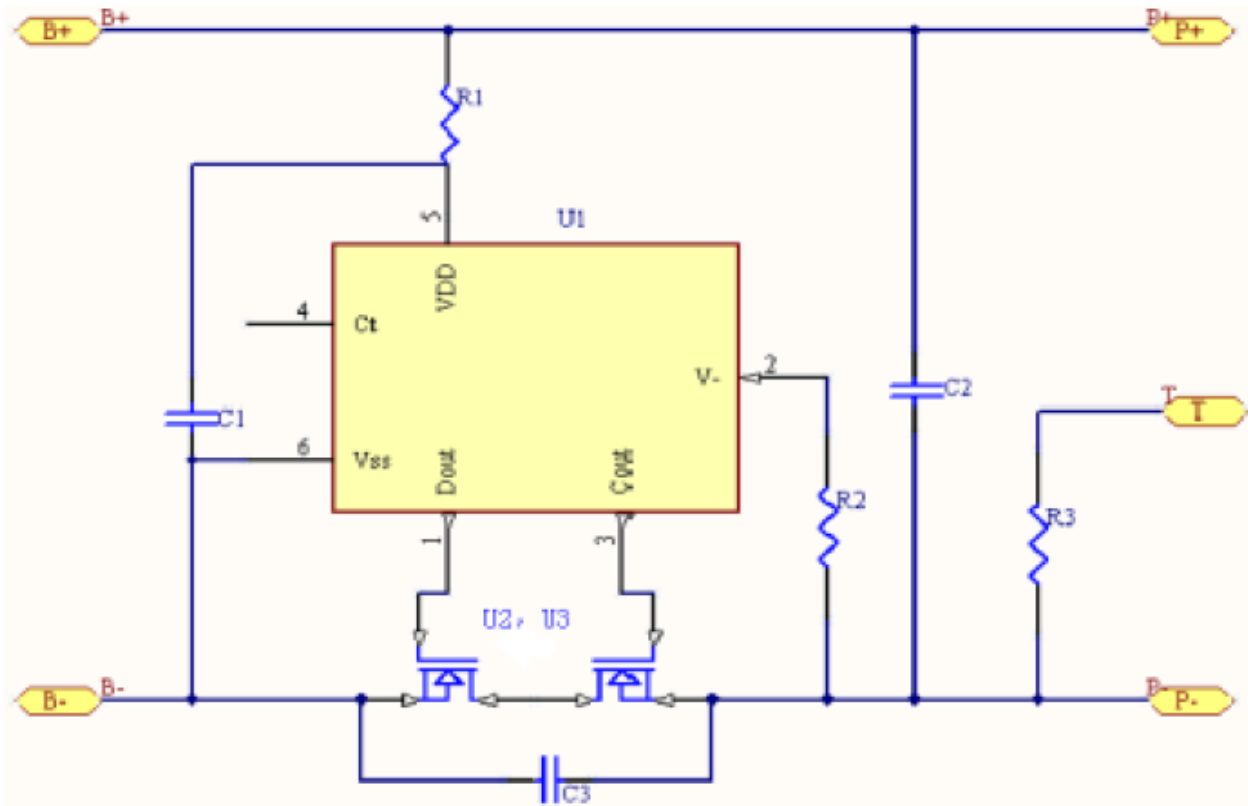

6.9 Parts list:

NO.	Location 元件编号	Part name 元件名称	Specification 元件规格	Pack type 封装式	Q' ty 数量	Maker/Remark 厂商/备注
1	U1	Battery protection IC	S8261-G3J	SOT-23-6	1	
2	U2	Silicon MOSFET	SIS8205A	TSSOP-8	1	
3	R1	Resistance	SMD 470 Ω \pm 5%	0603	1	
4	R2	Resistance	SMD 2K \pm 5%	0603	1	
5	C1	Capacitance	SMD 0.1 μ F	0603	1	
6		NTC	10K \pm 1%		1	
7	PCB	Print circuit board	TBD			

GREAT POWER

7.Security Testing Standard

Item	Battery Condition	Test Method	Requirements
Over charge test	Fresh, Fully Charged	Charge the cell at constant current $3C_5A$ & constant voltage 4.8V, charging for the current close to the 0,keep it for 30 minutes.	No explode No fire
Over discharge test	Fresh, Fully Charged	Cell be discharged at constant current $0.2C_5A$ to 3.0V, then contact the 30Ω carrier resistance discharge 24h.	No explode no fire,nor smoke
Heat shock test	Fresh, Fully Charged Temperature $5^\circ C$	Put the cell in hot box ,then heat up to $130^\circ C$ in1 minute, remain for 10 minutes.	No explode No fire
Impact test	Fresh, Fully Charged	A 9.1kg weight to be dropped from 610mm height onto the cell center.	Noexplode No fire
Crush	Fresh, Fully Charged	Crush between two flat plates. Applied force is about 13kN(1.72Mpa) for 10min.	No explode, No fire
Short Circuit test	Fresh, Fully Charged	make short-circuited by connecting the (+) and (-) terminals of the cell with a Cu wire having a maximum resistance load of 0.1Ω .Tests are to be conducted at room temperature($20\pm 2^\circ C$).	No explode, No fire Top temperature no exceed $150^\circ C$
Rate test	Fresh, Fully Charged	$0.2C/0.5C/1C$ charge & discharge.	
Low temperature discharge test	Fresh, Fully Charged	put the cell in $-20^\circ C$ for 1h, then discharge at $0.2C$ to 2.75V.	Discharge capacity $\geq 50\%$
High temperature discharge test	Fresh, Fully Charged	Put the cell in $55\pm 2^\circ C$ for 1h, then discharge at $0.2C$ to 2.75V.	Discharge capacity $\geq 95\%$
Vibrate test	Fresh, Fully Charged	Vibrate the cell for 30 minutes per each of the three mutually perpendicular axis (X,Y,Z) after rated charge.	No rupture, no fire Nor critical damage
Drop test	Fresh, Fully Charged	Drop the cell from 1m above onto concrete board with 18~20mm thickness for one time each fro every direction after rated charge. After test, cells are discharged at $1C$ and charged at $1C$,cycles 3times to obtain the time of discharging.	No rupture, no fire Nor critical damage ≥ 51 min

8. Storage and Transportation

GREAT POWER

8.1 Storage:

- 8.1.1 The Li-ion battery pack should be stored in a cool, dry and well-ventilated area. and should be far from the fire and the high temperature.
- 8.1.2 The best capacity in storage is 30%-50% (voltage between 3.6-3.9V).
- 8.1.3 The battery should store in the product specification book stipulation temperature range. the best storage temp. is 0 to 25°C. The best humidity is 60±25%.
- 8.1.4 If has surpasses above for six months the long time storage, suggested you should carry on additional charge to the battery.

8.2 Transportation:

- 8.2.1 Do not mix the battery products with other cargos.
- 8.2.2 Do not immerse the battery products in water or allow it to get wet.
- 8.2.3 Do not over 7 layers staking and upside-down.
- 8.2.4 The highest temperature in transportation is lower than 65°C.

9. Use Attentions:

To ensure proper use of the battery please read the manual carefully before using it.

9.1 Handling:

- 9.1.1 Do not expose to, dispose of the battery in fire.
- 9.1.2 Do not put the battery in a charger or equipment with wrong terminals connected.
- 9.1.3 Avoid shorting the battery
- 9.1.4 Avoid excessive physical shock or vibration.
- 9.1.5 Do not disassemble or deform the battery.
- 9.1.6 Do not immerse in water.
- 9.1.7 Do not use the battery mixed with other different make, type, or model batteries.
- 9.1.8 Keep out of the reach of children.

9.2 Charge:

- 9.2.1 Battery must be charged in appropriate charger only.
- 9.2.2 Never use a modified or damaged charger.
- 9.2.3 Do not leave battery in charger over 24 hours.
- 9.2.4 Charging current: Can not surpass the biggest charging current which in this specification book stipulated.
- 9.2.5 Charging voltage: Does not have to surpass the highest amount which in this specification book stipulated to decide the voltage.
- 9.2.6 Charge temperature: The battery must carry on the charge in the ambient temperature scope which this specification book stipulated.
- 9.2.7 Uses the constant electric current and the constant voltage way charge, the prohibition reverse charges. If the battery positive electrode and the cathode meet instead, can damage the battery.

9.3 Discharge:

- 9.3.1 The discharging current does not have to surpass this specification book stipulation the biggest discharging current, the oversized electric current electric discharge can cause the battery capacity play to reduce and to cause the battery heat.
- 9.3.2 Electric discharge temperature: The battery discharge must carry on in the ambient temperature scope which this specification book stipulated.
- 9.3.3 Over-discharges: After the short time excessively discharges charges immediately cannot affect the use, but the long time excessively discharges can cause the battery the performance, battery function

GREAT POWER

losing. The battery long-term has not used, has the possibility to be able to be at because of its automatic flashover characteristic certain excessively discharges the condition, for prevented excessively discharges the occurrence, the battery should maintain the certain electric quantity.

9.4 Disposal:

Regulations vary for different countries. Dispose of in accordance with local regulations.

10. Period of Warranty

There is a six-month warranty for our export batteries from the date of shipment. If the problem happened during the warranty period, we are responsible to replace the defective ones according to the accurate analysis results. However, we won't take any responsibility if the problem is caused by the battery-related applications and related products.

11. Others

Because batteries utilize a chemical reaction, battery performance will deteriorate over time even if stored for a long period of time without being used. In addition, if the various usage conditions such as charge, discharge, ambient temperature, etc. are not maintained within the specified ranges the life expectancy of the battery may be shortened or the device in which the battery is used may be damaged by electrolyte leakage. If the batteries cannot maintain a charge for long periods of time, even when they are charged correctly, this may indicate it is time to change the battery.

12. Note:

Any other items which are not covered in this specification shall be agreed by both parties.