


Flat Cables


L-KLS17-FFC-1.0-16P 1.0mm Pitch

Notes:

Storage condition: Recommended
Temp: 15°C~25°C ; Humidity: 30~60RH%

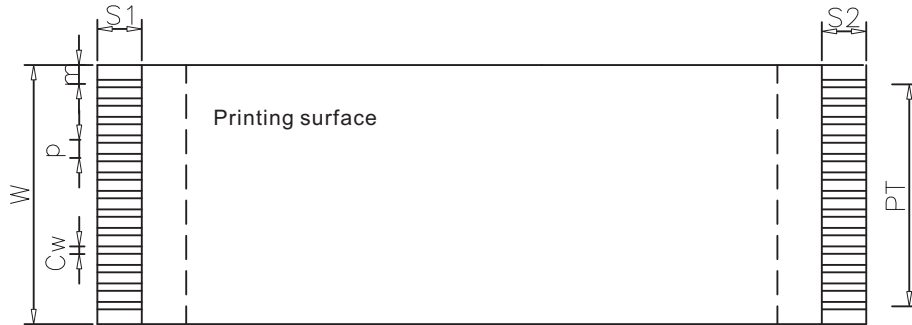


Printing surface

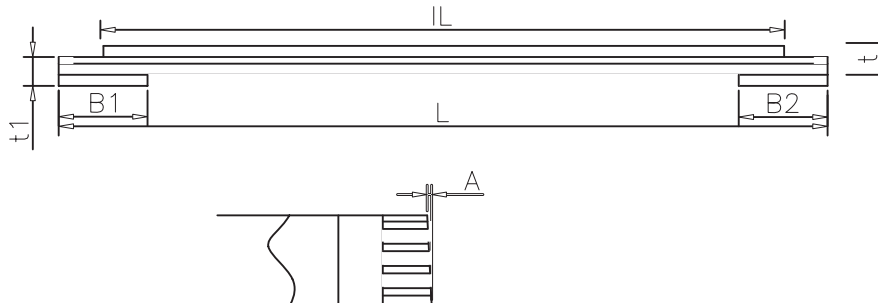

ORDER INFORMATION

Product NO.: L-KLS17-FFC-1.0-16P-L80A4/8

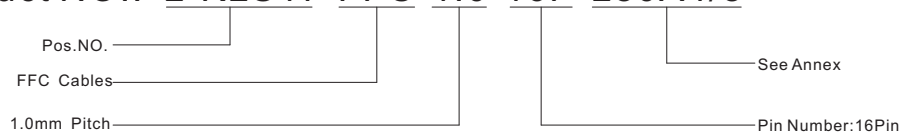

Flat Cables

L-KLS17-FFC-1.0-16P 1.0mm Pitch

Item	Specification
NO. of conductors	16
Pitch	1.0±0.05
Total Pitch	15±0.05
Total Length	80±3
Insulation Length	72±2
Margin Width	1.0±0.05
Total Width	17±0.08
Strip Length	4±0.5
Strip Length	4±0.5
Reinforeing tape length	8±1
Reinforeing tape length	8±1
Slanting	≤0.3
Over lap	/
Terminal thickness	0.37±0.05
Thickness insulation	0.186±0.05
Conductor thickness	0.1±0.005
Conductor width	0.7±0.03
Supporting Tapc Color	(Blue)
PET(Supporting Tapc Color)	0.225mm
PET(Insulation)	0.043mm (Without printing)
PET(Insulation)	0.043mm(Printing)

ORDER INFORMATION

Product NO.: L-KLS17-FFC-1.0-16P-L80A4/8

