


BELEKS Spring Terminal block KLS2-238



Spring Terminal Block

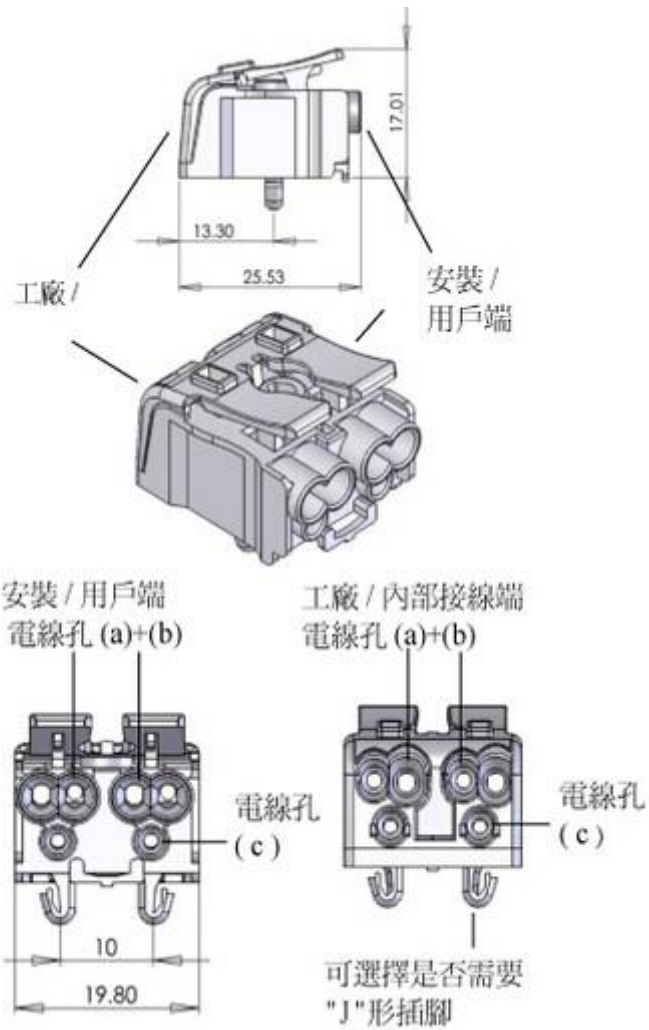

Material

Housing: PA66, UL94V-0
 Wire guard :Stainless steel
 Contact :Copper

The electrical parameters

Rated voltage: 450V
 Rated current: 10 A
 Contact resistance: 20 mΩ
 Insulation resistance:5000MΩ/DC1000V
 Withstanding voltage : AC2500V/1 min
 Wire range: 22-14 AWG, 0.75-2.5mm²
 Ambient temperature : -40°C~+105°C
 Strip length : 7-7.5 mm
 Pitch :10.0mm
 Poles:2P-5P

