
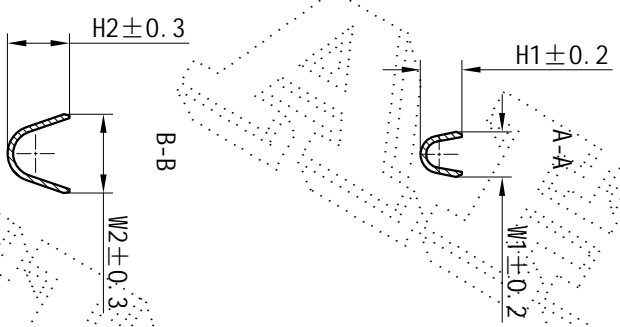
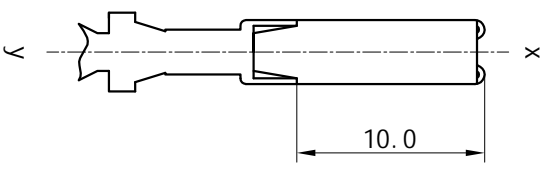
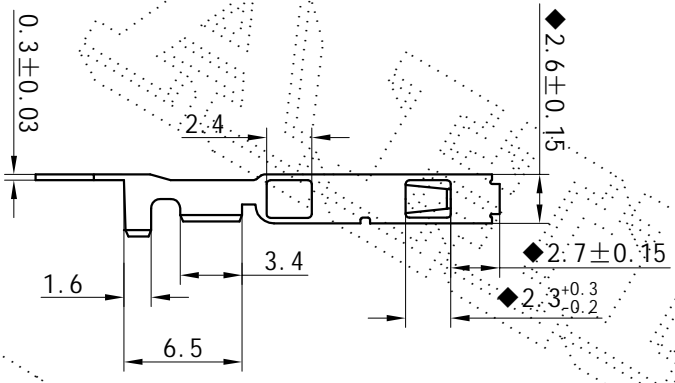


MARK	ECN	DESCRIPTION	DWN.	DATE

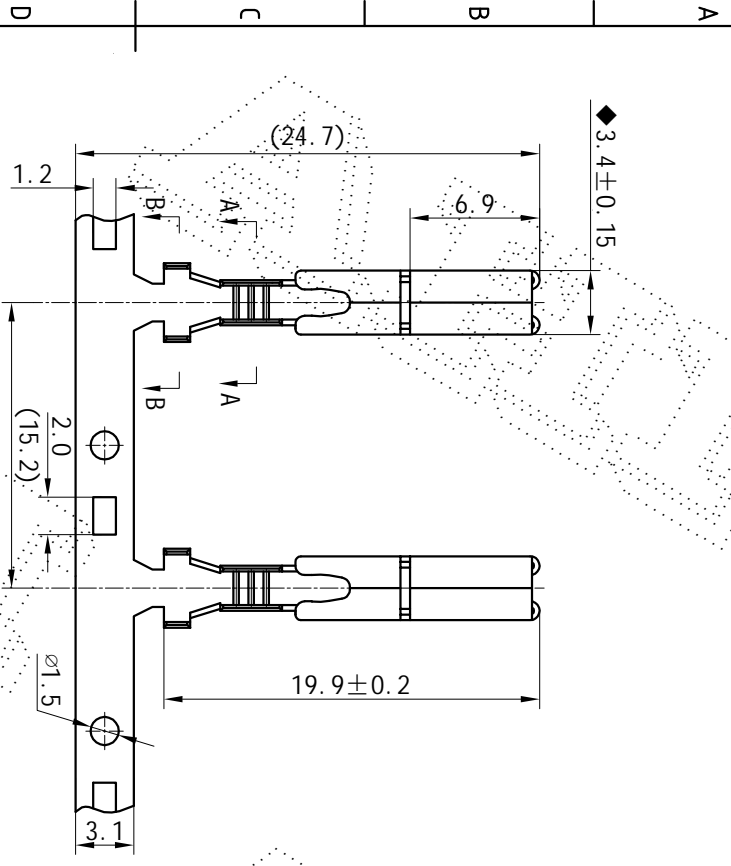

1. Surface of salt pieces are not allowed to have obviously scratch, crack, deformation, etc. Stamping defects, Chamfering clear, Stamping phi front are both less than 0.02mm.
2. The rounded corners R without marked is R0.2mm to R0.5mm.
3. Product embossing and reinforcement depth is 0.08mm to 0.1mm.
4. "◆" means important features, "★" means the key features.
5. Table of Dimension tolerance which wasn't indicate GB/T15055-2007 in.
6. Strip cannot have bending phenomenon.

NO. TOLERANCES GB/T15055-2007-m	
DIM. RANGE	DIM. TOLERANCES
0.5~3	±0.20
>3~6	±0.30
>6~30	±0.40
>30~120	±0.50

NO.	TYPE	PART NO.	MATERIAL	W1	W2	H1	H2
②	DJ627-1.5*0.8B		COPPER	3.0	4.5	3.6	4.1
①	DJ627-1.5*0.8A		COPPER	2.4	4.2	2.2	3.3

SURFACE TREATMENT	TIN-PLATED			
MATERIAL	SEE TABLE			
NAME	TERMINAL			
PART NO.	SEE TABLE			
ARTICLE NO.				
MOULD NO.:				
REV. 1.0	1st-PERSON VIEW	FREE	UNIT mm	PAGE 1/1
乐清市奥海电气有限公司 Yueqing Aohai Electric Co., Ltd.				
DRAWN BY:		CONFIRMED BY APPROVED BY		