


MARK	ECN	DESCRIPTION	DWN.	DATE

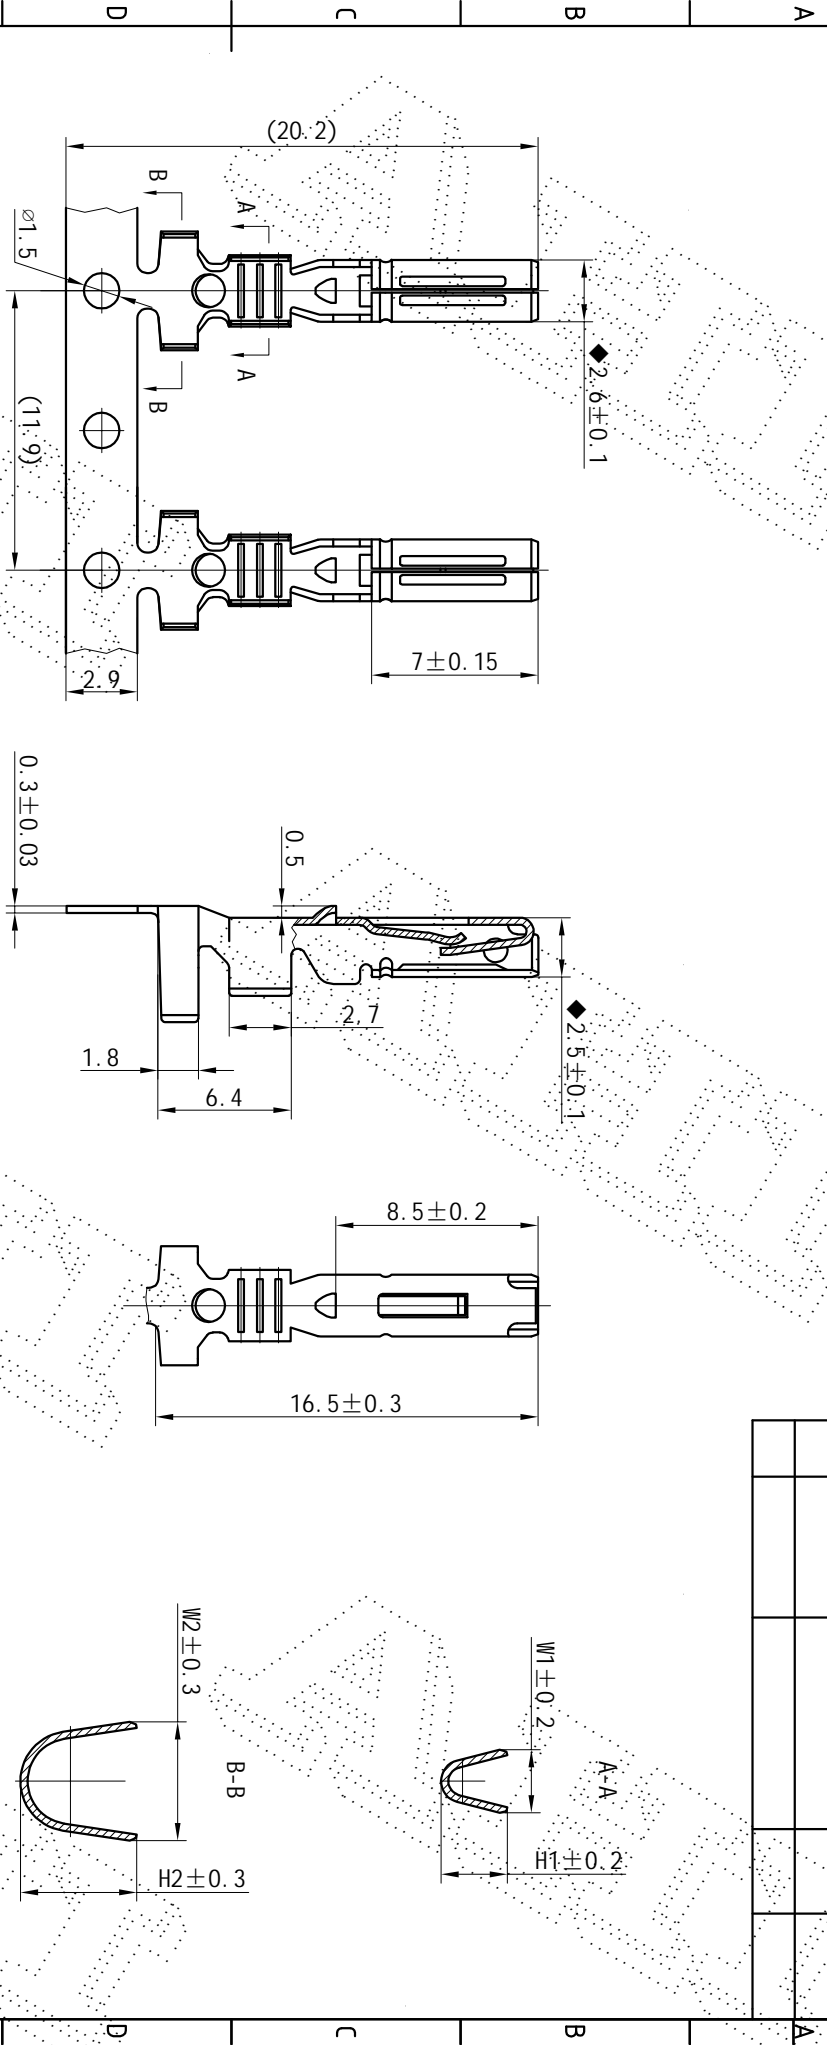

- Technical requirements:
1. Surface of salt pieces are not allowed to have obviously scratch, crack, deformation, etc. Stamping defects, Chamfering clear, Stamping phi front are both less than 0.02mm.
  2. The rounded corners R without marked is R0.2mm to R0.5mm.
  3. Product embossing and reinforcement depth is 0.08mm to 0.1mm.
  4. "◆" means important features, "★" means the key features.
  5. Table of Dimension tolerance which wasn't indicate GB/T15055-2007-m
  6. Strip cannot have bending phenomenon.

NO. TOLERANCES	GB/T15055-2007-m
DIM. RANGE	DIM. TOLERANCES:
0.5~3	±0.20
>3~6	±0.30
>6~30	±0.40
>30~120	±0.50

NO.	TYPE	WIRE RANGE (mm <sup>2</sup> )	W1	W2	H1	H2	MOULD NO.:
②	DJ621-1.5×0.8B	1.0-1.5	3.0	5.2	3.3	4.6	
①	DJ621-1.5×0.8A	0.5-1.0	2.9	4.5	2.6	3.8	

SURFACE TREATMENT	TIN-PLATED
MATERIAL	BRASS
NAME	TERMINAL
PART NO.	SEE TABLE
DRAWN BY:  CONFIRMED BY:  APPROVED BY:	

**乐清市奥海电气有限公司**  
Yueqing Aohai Electric Co., Ltd.

REV.	1st-PERSON VIEW	FREE	UNIT	PAGE
1.0		3:1	mm	1/1