

DIP Switch Series

KLS7-DA-Right Angle Type Dip Switch Series




SPECIFICATIONS

- Mechanical life: 2000 operations per switch
- Operation Force : $\leq 9.8N$ max.
- Stroke: 2.0mm
- Operation Temp: $-20^{\circ}C \sim +70^{\circ}C$
- Electrical life: 2000 operations per switch-24 VDC, 25mA
- Contact Resistance: 50m max. at initial
- Non-Switching Rating: 100mA, 50VDC
- Switching Rating: 25mA, 24VDC
- Circuit: Single pole single throw

Soldering and Cleaning Processes
Keep all switch contacts in their "OFF" position for all operations



Model No.	No. Pos.	A
DA-01	1	4.10
DA-02	2	6.64
DA-03	3	9.18
DA-04	4	11.72
DA-05	5	14.26
DA-06	6	16.80
DA-07	7	19.34
DA-08	8	21.88
DA-09	9	24.42
DA-10	10	26.96
DA-12	12	32.04

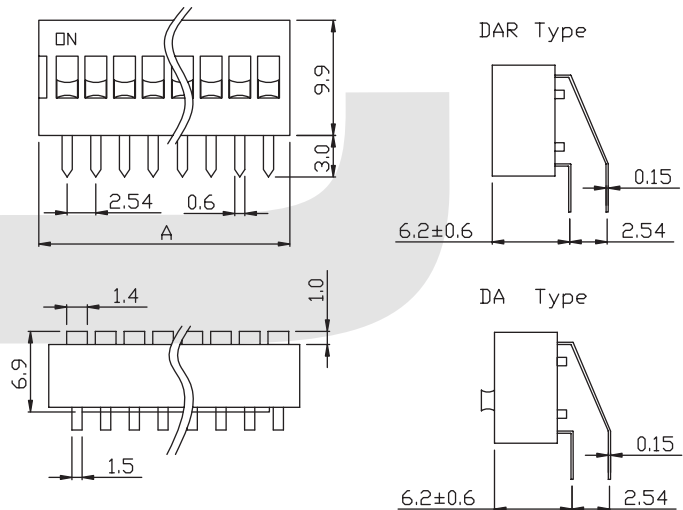

ORDER INFORMATION

KLS7-DA-XX-R-00

- Part Number
- DA : Bulge Type Dip Switch
- DAR: Recessed Type Dip Switch
- Number of Pos.: 01~12 Pos.
- Packing: 0=Tube 1 = Tape
- 0: Non-sealed
- 1: With sealed
- Color: R=Red B=Blue N=Black