

## ÖZELLİKLER:

- LED Paneller ve LED Florasanlar için ideal,
- Sabit akım ile çalışmaya uygun,
- 976 lümeneye kadar ışık şiddeti,
- Yüksek renk geri verim endeksi; CRI>80,
- 3-Adım MacAdam Renk Gruplaması,
- Düşük parlaklık toleransı,
- 2700K - 6500K aralığında zengin renk tercihi seçenekleri,
- 50.000 saatin üzerinde ömür,
- 3 yıl garanti<sup>1</sup>

## FEATURES:

- Ideal for LED Panels and LED Tubes,
- Suitable for constant current driving,
- Luminous flux up to 976lm,
- High color rendering index; CRI>80,
- 3-Step MacAdam Color Binning,
- Small luminous flux tolerances,
- Various color temperature options between 2700K-6500K,
- More than 50.000hrs life-time,
- 3 years warranty<sup>1</sup>



## UYGULAMA ALANLARI / TYPICAL APPLICATIONS:



LED PANEL



LED TUBE


Sipariş Kodları / Ordering Codes	Renk Sıcaklığı / Color Temp.	
SL1D-017520008-02-C1L827	WW-2700K	
SL1D-017520008-02-C1L830	WW-3000K	
SL1D-017520008-02-C1L840	NW-4000K	
SL1D-017520008-02-C1L850	CW-5000K	
SL1D-017520008-02-C1L855	CW-5500K	
SL1D-017520008-02-C1L865	CW-6500K	

## TEKNİK VERİLER / TECHNICAL SPECIFICATIONS:


Tj = 25°C, RH30%

Ürün Kodu / Part Number	Renk Sıcaklığı / Color Temperature	Sürme Voltajı / Forward Voltage Vf			Sürme Akımı / Forward Current If		Işık Akısı / Luminous Flux @100mA, 25°C, RH30%			Işık Akısı / Luminous Flux @150mA, 25°C, RH30%		Güç Tüketimi / Power Consumption		CRI		
		Min.	Typ.	Max.	Typ.	Max.	Min.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Min.	Typ.	Max.
SL1D-017520008-02-C1L827	2700K	44,8 V	48,9 V	52,8 V	100 mA	150 mA	516 lm	600 lm	684 lm	733 lm	856 lm	4,9 W	7,9 W	80	83	90
SL1D-017520008-02-C1L830	3000K	44,8 V	48,9 V	52,8 V	100 mA	150 mA	516 lm	600 lm	684 lm	733 lm	856 lm	4,9 W	7,9 W	80	83	90
SL1D-017520008-02-C1L840	4000K	44,8 V	48,9 V	52,8 V	100 mA	150 mA	586 lm	674 lm	762 lm	832 lm	960 lm	4,9 W	7,9 W	80	83	90
SL1D-017520008-02-C1L850	5000K	44,8 V	48,9 V	52,8 V	100 mA	150 mA	595 lm	684 lm	774 lm	845 lm	976 lm	4,9 W	7,9 W	80	83	90
SL1D-017520008-02-C1L855	5500K	44,8 V	48,9 V	52,8 V	100 mA	150 mA	595 lm	651 lm	706 lm	845 lm	928 lm	4,9 W	7,9 W	80	83	90
SL1D-017520008-02-C1L865	6500K	44,8 V	48,9 V	52,8 V	100 mA	150 mA	595 lm	651 lm	706 lm	845 lm	928 lm	4,9 W	7,9 W	80	83	90

## DEVRE ŞEMASI / CIRCUIT DIAGRAM:



## BOYUTLAR / DIMENSIONS:

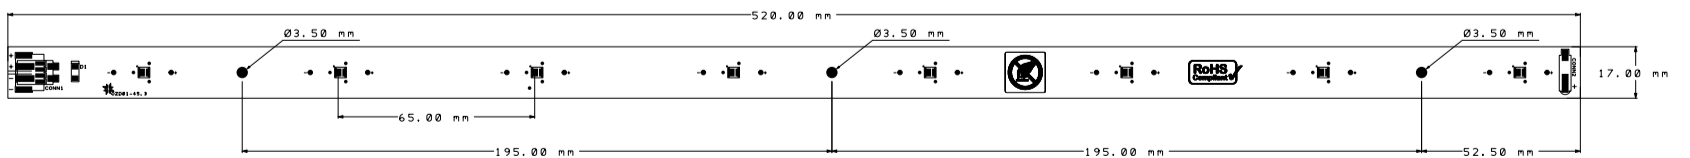

<sup>1</sup>HEP ve HEC marka sürücülerimizle birlikte kit olarak alındığında garanti süresi 5 yıldır.

<sup>1</sup>When purchased as kit solution with our HEC and HEP LED Drivers, 5 years warranty is applied.