
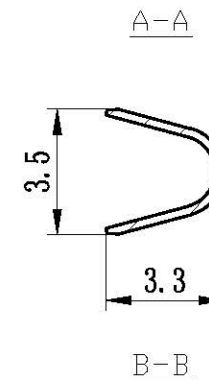

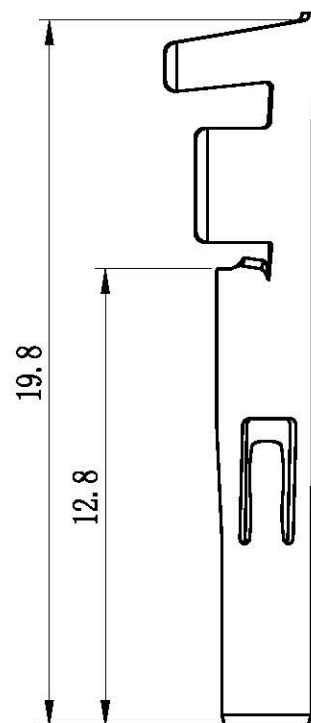


| REV | DESCRIPTION | DATE |
|-----|-------------|------|
| A/0 | 原始版本        | E    |
| A/1 | 修订版本        |      |

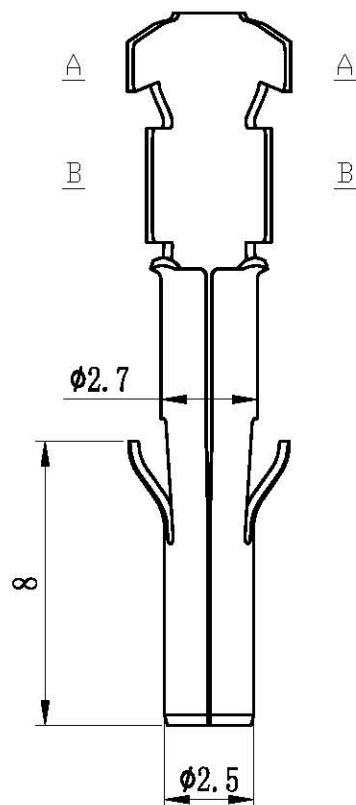

|    |       |       |        |         |
|----|-------|-------|--------|---------|
| 范围 | >0~3  | >3~18 | >18~50 | >50~120 |
| 公差 | ±0.12 | ±0.15 | ±0.3   | ±0.5    |

主要技术参数  
Main Specifications

线数(poles): 2 to 6/10P 2×2to2×3P 2×3to5×3P  
额定电流(Current rating): 10~8A AC, DC  
额定电压(Voltage rating): 300V AC, DC  
温度范围(Temperature range): -25°C to +85°C  
接触电阻(Contact resistance): ≤20mΩ  
绝缘电阻(Insulation resistance): ≥1000MΩ  
耐电压(Withstand voltage): 1500V AC/minute  
适用线规(Applicable wire): AWG #20 to #14  
适用基板厚度(Applicable PC board thickness): 1.6mm

|                    |       |                         |                              |                 |
|--------------------|-------|-------------------------|------------------------------|-----------------|
| 1                  |       | Terminal<br>端子          | Phosphor bronze tin<br>磷青铜镀锡 | 3500PCS/Roll    |
| 序号                 | 料号    | 名称                      | 材料                           | 附注              |
| 未注公差               |       | KLS ELECTRONIC CO., LTD |                              |                 |
| X.° ±3° X.X° ±0.5° |       | 单位                      | 比例                           | Design<br>Units |
| <10                | 10-30 | >30                     | MM Only                      | —               |
| ±0.2               | ±0.25 | ±0.3                    | METRIC                       | SIZE            |
| 制作                 | 审核    | 批准                      | 图号                           | Part No         |
| 见图解                |       | 品名                      | L-KLS1-XL1-6.35-FT           |                 |