

CHART:

L	T
L ≤ 1M	± 30MM
1M < L ≤ 5M	± 50MM
5M < L ≤ 10M	± 100MM
L > 10M	± 150MM

REMARK:



1. CABLE: UTP CAT. 5E CABLE 4P\*26AWG BC, PVC JACKET, OD: 5.0 ± 0.20MM.
2. CONN. : P1 & P2: 8P8C PLUG, LONG BODY, SINGLE LAY, GOLD PLATED.
3. ALL HOOD: MOLDED PVC.
4. CABLE ASS'Y MUST PASS CONTINUITY TEST.
5. PACKING: EACH CABLE IN POLY-BAG.

WIRE CONNECTION

COLOR	P1		P2
WHITE/ORANGE	1	————	1
ORANGE	2	————	2
WHITE/GREEN	3	————	3
BLUE	4	————	4
WHITE BLUE	5	————	5
GREEN	6	————	6
WHITE/BROWN	7	————	7
BROWN	8	————	8

PACKING

POLY-BAG

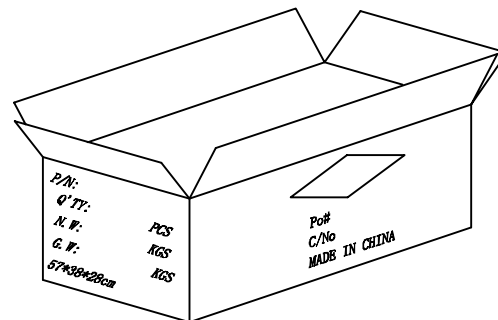

TOLERANCE			KLS ELECTRONIC CO., LTD			
	INCHES	M/M	SCALE	NONE	REV A	
. X	. 015	. 30	UNIT	MM	DWG NO.	
. XX	. 010	. 10	SHEET	1/1	DATE	
. XXX	. 005	. 05	TITLE 8P8C PLUG/8P8C PLUG			
DRAWN BY			PART NO. L-KLS17-LCP-01-0.5M-E-26AWG			
CHECK BY						
APPD BY						