



底座向上示意圖

CIRCUIT

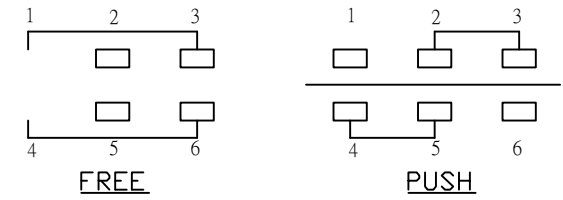

P.C.B LAYOUT

SPECIFICATIONS:

- 1:Rating :DC 30V 0.1A
- 2:Operating Force :200gf±50gf
- 3:CIRCUIT:2C-2P
- 4:Timing:Non-shorting
- 5:Operating Mode:
L:Seif-LOCK
N:Non-LOCK
NC:Non-LOCK with Click
- 6:Stroke:Full 2.5mm
- 7:General Tolerance:±0.2mm
- 8:Life Expectanc :10.000 Cycles

7	彈簧	碳素鎢絲	1	本色
6	鉤針	不銹鋼	1	本色
5	簧片	複合銅銀	1	本色
4	蓋子	PC	1	白色
3	導心	POM	1	藍色
2	針腳	黃銅鍍銀	6	鍍銀
1	底座	PA66	1	黑色
NO	PART NAME	MATERIALS	Q'TY	FINISHING

SCALE (比例): 1: 1
TOLERANCE UNLESS SPECIFIED WITHIN 1.5 mm ± 0.10 mm OVER 1.5 mm ± 0.20 mm
FILE NAME :BPSJ-2215L

圓達實業股份有限公司					
TITLE 圖名	PUSH SWITCH			SIZE 圖紙	A4
DWG NO. 圖號	BPSJ-2215L			UNIT 單位	mm
REV. 版本	A	DATE 日期	2010-10-21	SHEET 張數	1 of 1
CHECKED BY 審核	Angel		DRAWN BY 製圖	Anna	