

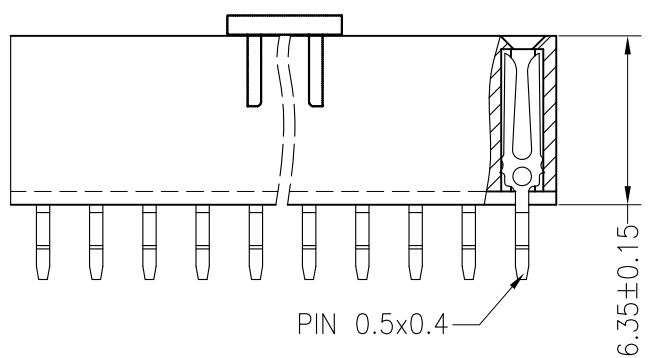
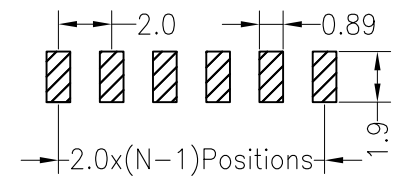


SPECIFICATIONS
 Rated Current:1.5AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

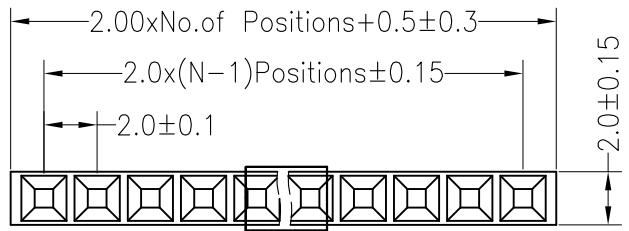

				OPERATION		DRAW	BEN	12.04.18	SCALE	FIT	KLS ELECTRONIC CO., LTD		
				X.X	±0.30				UNIT	mm			
				X.XX	±0.20	CHECK	SIZE	A4	PART NO.	L-KLS1-208BC-6.35-1-04-T-W			
				X.XXX	±0.10		SHEET	1/1	TITLE:	2.00PF H6.35mm 1xNpin 贴片 W款			
A0	2012.04.18	NEW DRAWING		Angle	±3°	APPROVE		PROJ.					
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	DIM	TOL							